


A feladat

2,a

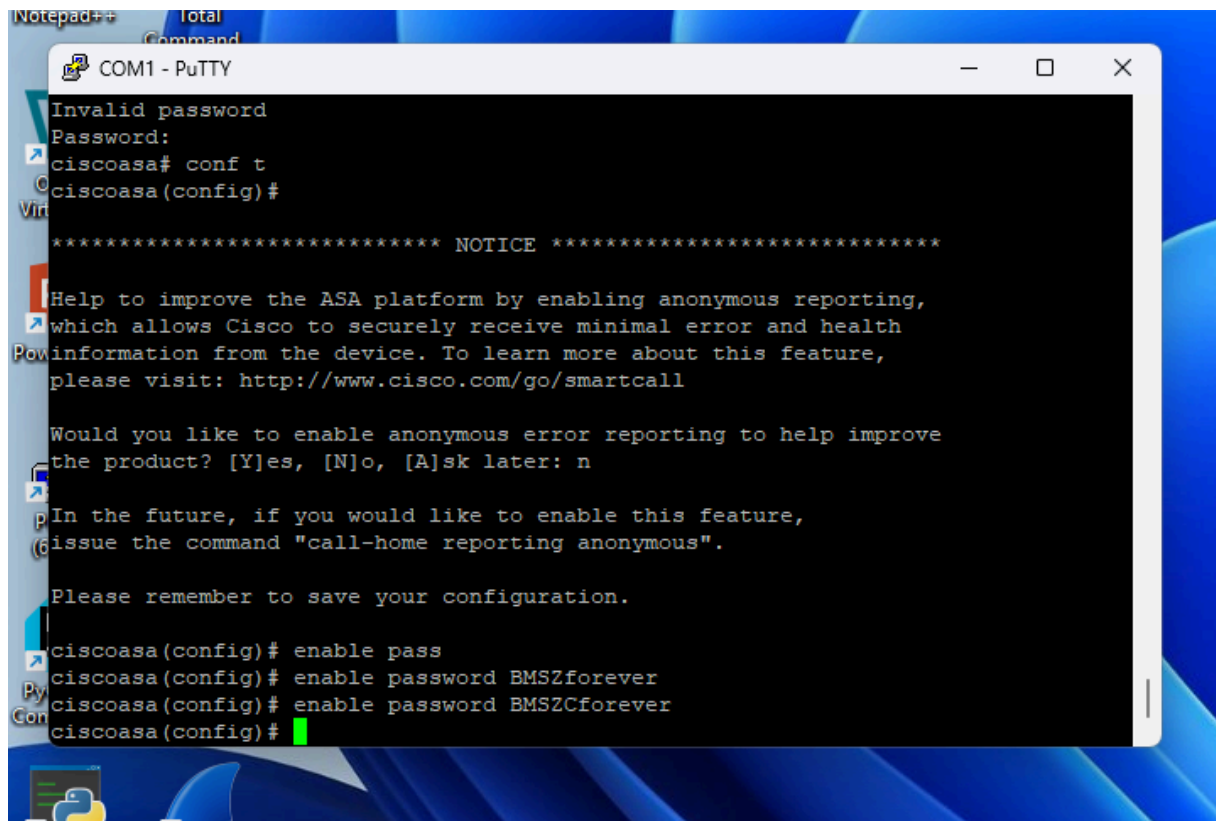

```
COM1 - PuTTY
Invalid password
Password:
ciscoasa# conf t
ciscoasa(config)#

***** NOTICE *****

Help to improve the ASA platform by enabling anonymous reporting,
which allows Cisco to securely receive minimal error and health
information from the device. To learn more about this feature,
please visit: http://www.cisco.com/go/smartcall

Would you like to enable anonymous error reporting to help improve
the product? [Y]es, [N]o, [A]sk later: n

In the future, if you would like to enable this feature,
issue the command "call-home reporting anonymous".

Please remember to save your configuration.


ciscoasa(config)# enable pass
ciscoasa(config)# enable password BMSZforever
ciscoasa(config)# enable password BMSZCforever
ciscoasa(config)#
```

2,b

```
interf vlan 1
nameif inside
security-level 85
ip add 10.0.0.15 255.255.255.0
no sh
```

```
interf ethernet 0/4
sw mode access vlan 1
no sh
```

show switch vlan

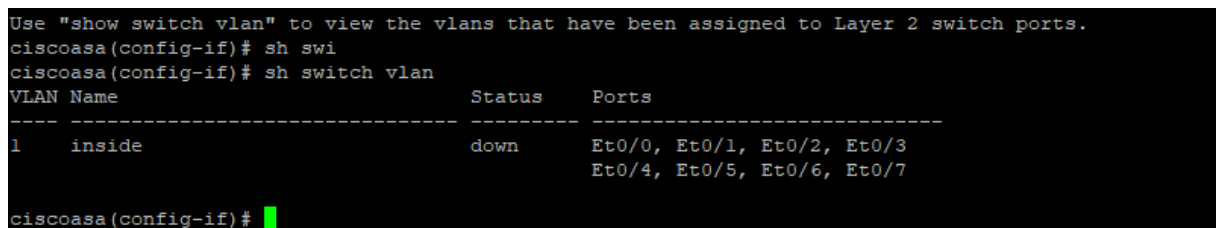

```
Use "show switch vlan" to view the vlans that have been assigned to Layer 2 switch ports.
ciscoasa(config-if)# sh swi
ciscoasa(config-if)# sh switch vlan
VLAN Name                               Status    Ports
-----
1    inside                               down      Et0/0, Et0/1, Et0/2, Et0/3
                                           Et0/4, Et0/5, Et0/6, Et0/7
ciscoasa(config-if)#
```

2,c

```
dhcpd address 10.0.0.120-10.0.0.140 inside
dhcpd dns 192.168.100.120
dhcpd enable inside
```

2,d

```
interf vlan 1
nameif outside
security-level 15
ip add 192.168.18.19 255.255.255.0
no sh
```

```
interf ethernet 0/2
sw mode access
sw acc v 2
no sh
```

```
ERROR: % Invalid input detected at '^' marker.
ciscoasa(config-if)# sh switch vlan
VLAN Name                Status    Ports
-----
1    inside                 down      Et0/0, Et0/1, Et0/3, Et0/4
                                Et0/5, Et0/6, Et0/7
2    outside                up        Et0/2
ciscoasa(config-if)#
```

2,e

```
route outside 0.0.0.0 0.0.0.0 192.168.18.1
```

3

←

↺

Nem biztonságos 192.168.15.101

🔍 ⋮ ☆ ⋮

CISCO

Firmware

Setup

Simultaneous Dual-Band Wireless-N Gigabit Router

Setup

Wireless

Security

Storage

Access Restrictions

Applications & Gaming

Administration

Basic Setup

DDNS

MAC Address Clone

Advanced Routing

Language

Select your language

Internet Setup

Internet Connection Type

Optional Settings
(required by some Internet Service Providers)

Network Setup

Router Address

DHCP Server Setting

Time Settings

Time Zone

Reboot

English

Help...

Automatic Configuration - DHCP

Host Name:

Domain Name:

MTU:

Auto

Size: 1500

IP Address:

192

.

168

.

15

.

101

Subnet Mask:

255.255.255.0

Device Name :

WRT610N

DHCP Server:

☒ Enabled

☐ Disabled

DHCP Reservation

Start IP Address:

192

.

168

.

15

.

150

Maximum Number of Users:

16

IP Address Range:

192

.

168

.

15

.

150 to 165

Client Lease Time:

0

minutes (0 means one day)

Static DNS 1:

0

.

0

.

0

.

0

Static DNS 2:

0

.

0

.

0

.

0

Static DNS 3:

0

.

0

.

0

.

0

WINS:

0

.

0

.

0

.

0

(GMT-08:00) Pacific Time (USA & Canada)

☒ Automatically adjust clock for daylight saving changes.

Reboot

Save Settings

Cancel Changes



Firmware Version: 2.00.01

Wireless

Simultaneous Dual-Band Wireless-N Gigabit Router

WRT610N

Setup

Wireless

Security

Storage

Access
Restrictions

Applications &
Gaming

Administration

Status

Basic Wireless Settings

Wireless Security

Wireless MAC Filter

Advanced Wireless Settings

Configuration View

5GHz Wireless Settings

☒ Manual ☐ Wi-Fi Protected Setup™

Network Mode: Mixed ▼
Network Name (SSID): BMSZCwifi15
Channel Width: Auto(20MHz or 40MHz) ▼
Wide Channel: Auto (DFS) ▼
Standard Channel: Auto (DFS) ▼
SSID Broadcast: ☒ Enabled ☐ Disabled

2.4GHz Wireless Settings

Network Mode: Mixed ▼
Network Name (SSID): BMSZCwifi15
Channel Width: 20MHz only ▼
Wide Channel: Auto ▼
Standard Channel: Auto ▼
SSID Broadcast: ☒ Enabled ☐ Disabled

[Help...](#)

Save Settings

Cancel Changes



Firmware Version: 2.00.01

Wireless

Simultaneous Dual-Band Wireless-N Gigabit Router

WRT610N

Setup

Wireless

Security

Storage

Access
Restrictions

Applications &
Gaming

Administration

Status

Basic Wireless Settings

Wireless Security

Wireless MAC Filter

Advanced Wireless Settings

5GHz Wireless Security

Security Mode:

Encryption:

Passphrase:

Key Renewal: seconds

2.4GHz Wireless Security

Security Mode:

Encryption:

Passphrase:

Key Renewal: seconds

[Help...](#)

Save Settings

Cancel Changes