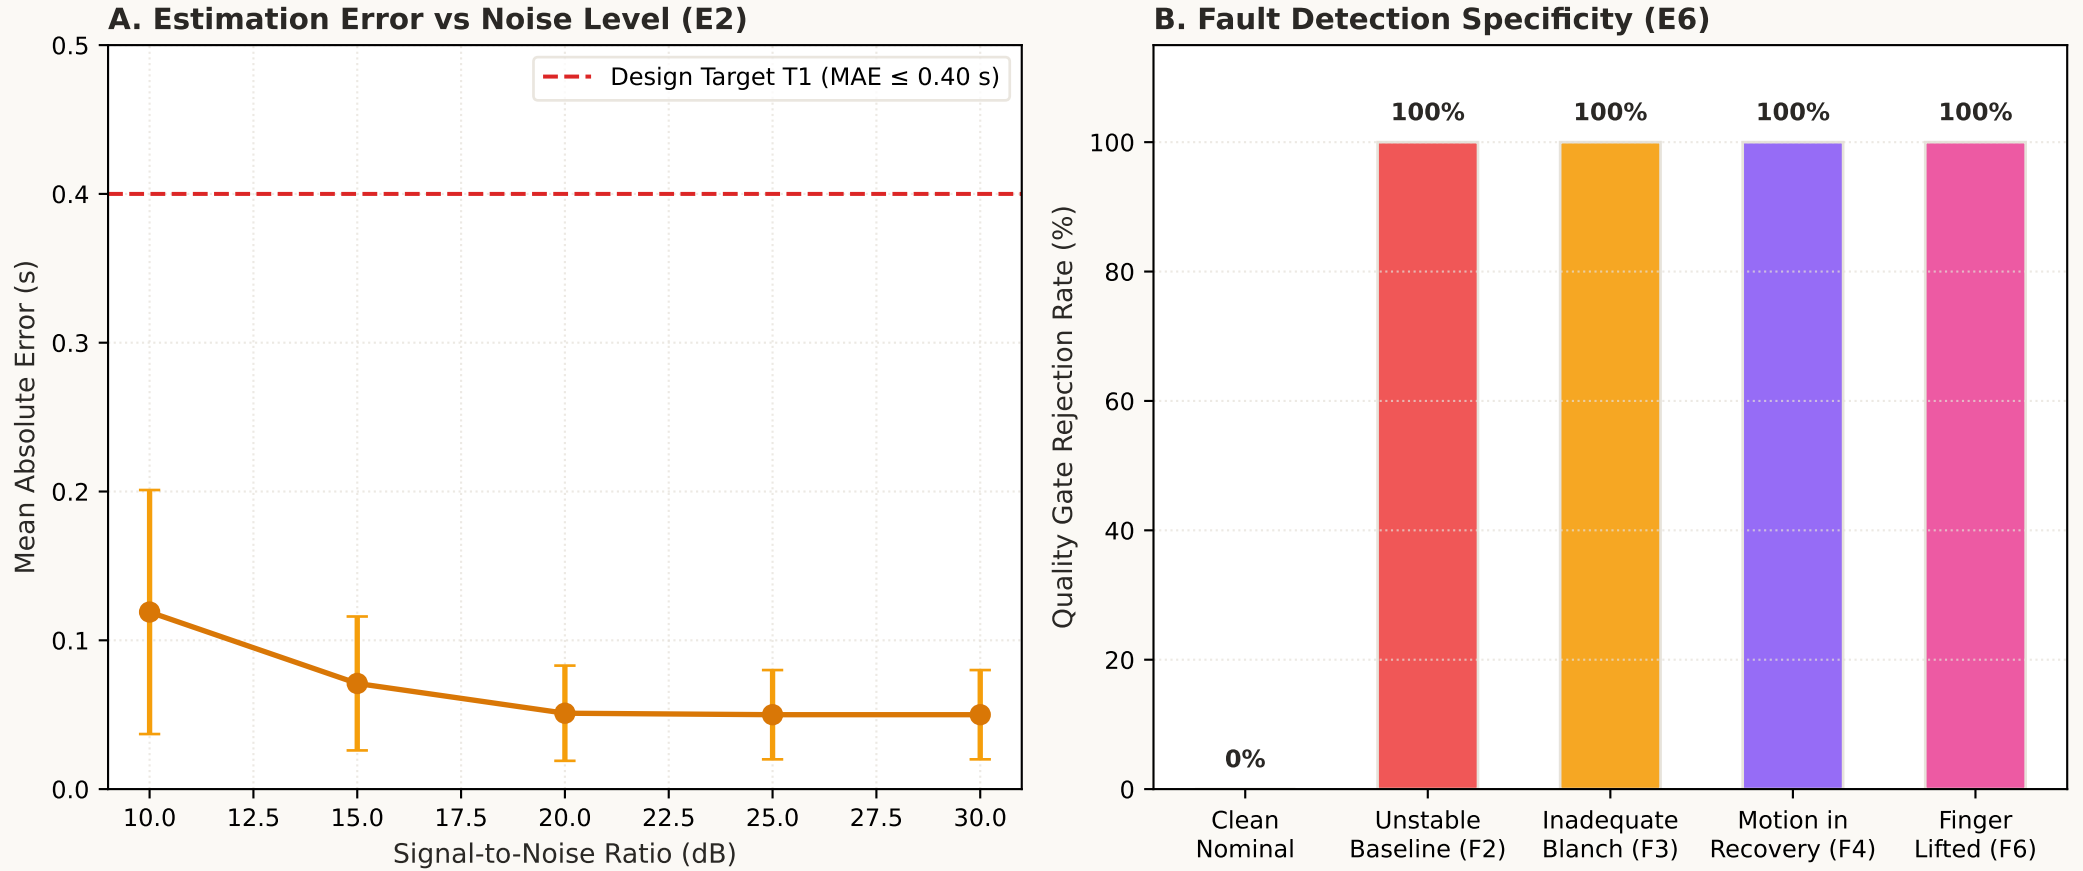
A. Estimation Error vs Noise Level (E2)
Design Target T1 (MAE ≤ 0.40 s)
Mean Absolute Error (s)
0.0
0.1
0.2
0.3
0.4
0.5
10.0
12.5
15.0
17.5
20.0
22.5
25.0
27.5
30.0
Signal-to-Noise Ratio (dB)
B. Fault Detection Specificity (E6)
Quality Gate Rejection Rate (%)
0
20
40
60
80
100
0%
100%
100%
100%
100%
Clean Nominal
Unstable Baseline (F2)
Inadequate Blanch (F3)
Motion in Recovery (F4)
Finger Lifted (F6)