



Practical 7

Aim : Configure and implement secure web communication using SSL/TLS protocols, including certificate management and secure session establishment.


Step 1: Open Cisco Packet Tracer and add **PC0**, **Server0**, and a **2960 Switch** to the workspace. Connect **PC0** and **Server0** to **Switch0** using **Copper Straight-Through** cables, then wait for the connection indicators to turn green.

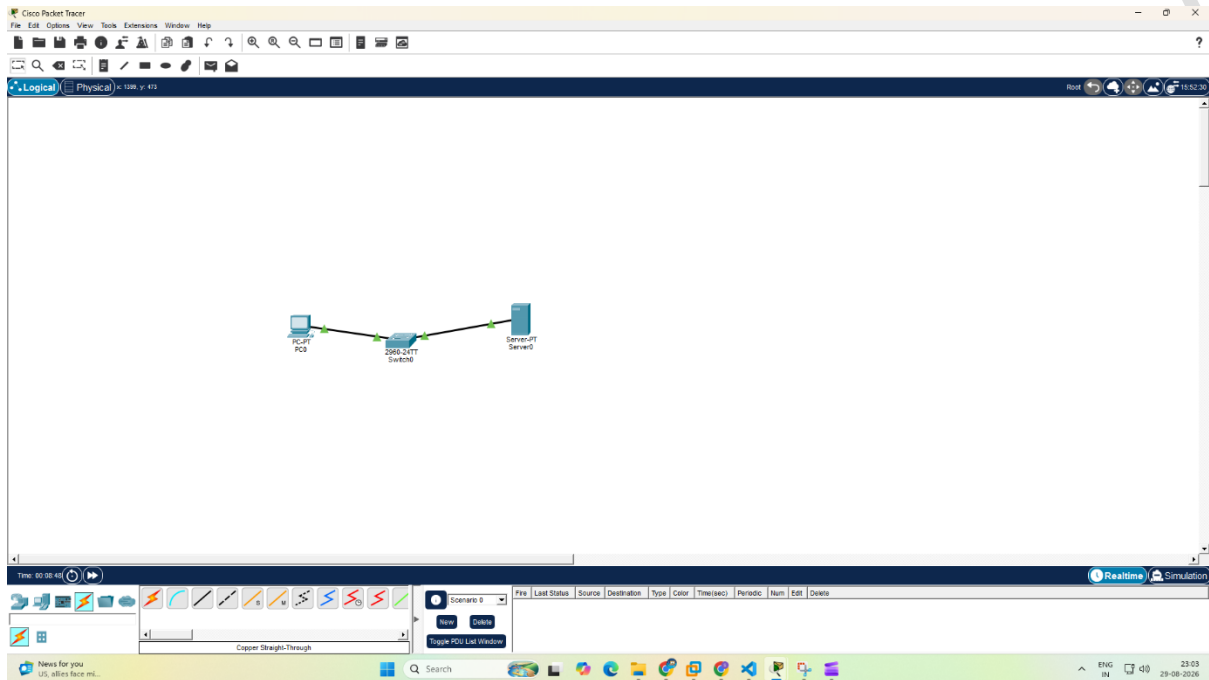


Step 2: Go to **PC0** → **Desktop** → **IP Configuration** and set IP Address to **192.168.1.10** and Subnet Mask to **255.255.255.0**. Leave the **Default Gateway** blank because both devices are on the same network.

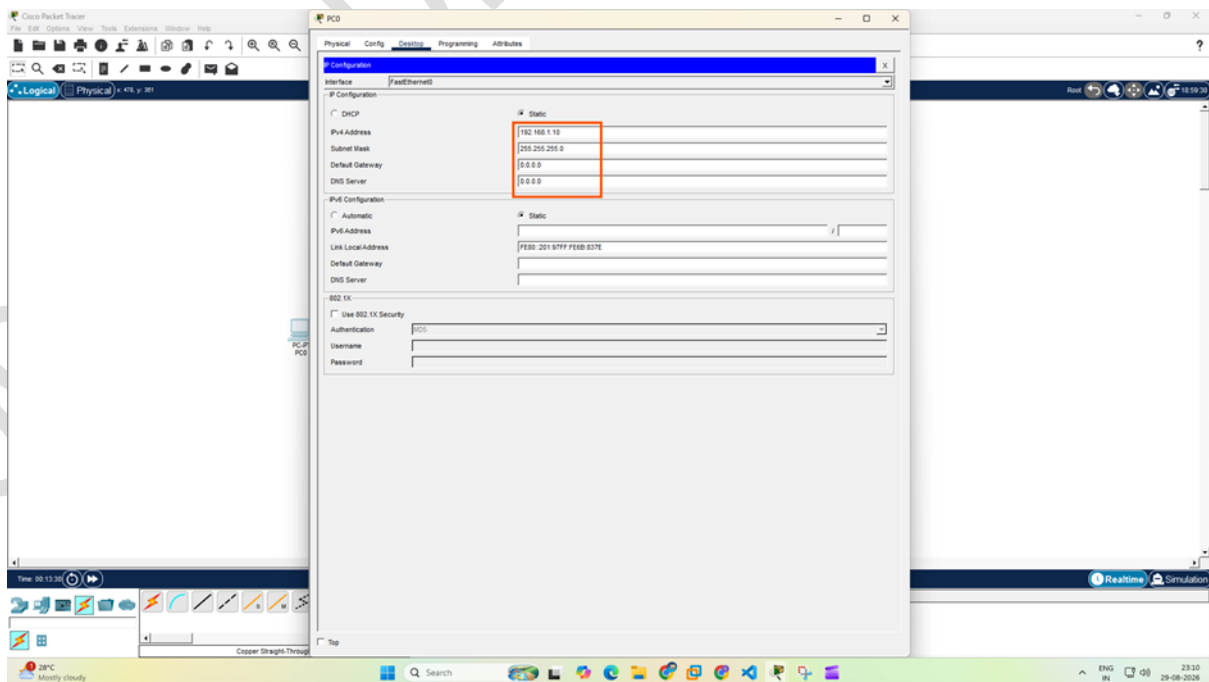

Step 3: Go to **Server0** → **Desktop** → **IP Configuration** and set IP Address to **192.168.1.20** and Subnet Mask to **255.255.255.0**.
Leave the **Default Gateway** blank. Network: **192.168.1.0/24**.

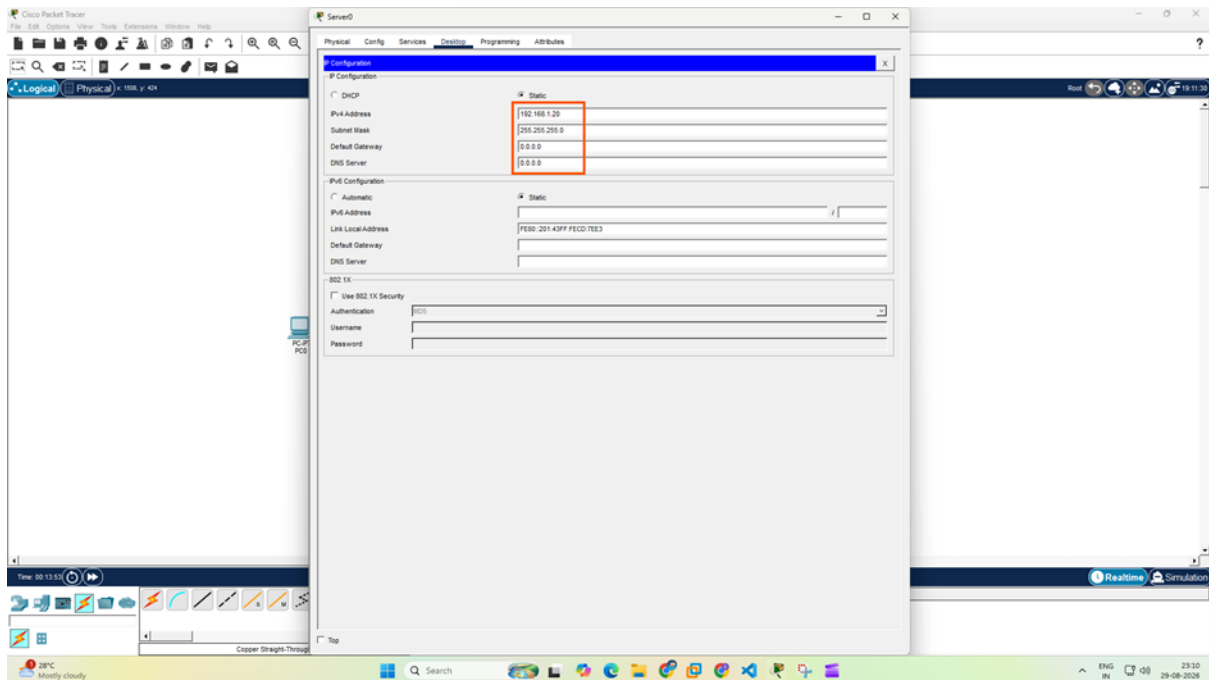


Step 4: Go to **PC0** → **Desktop** → **Command Prompt** and type **ping 192.168.1.20**.
If you get **"Reply from 192.168.1.20"**, the PC and Server are successfully communicating.

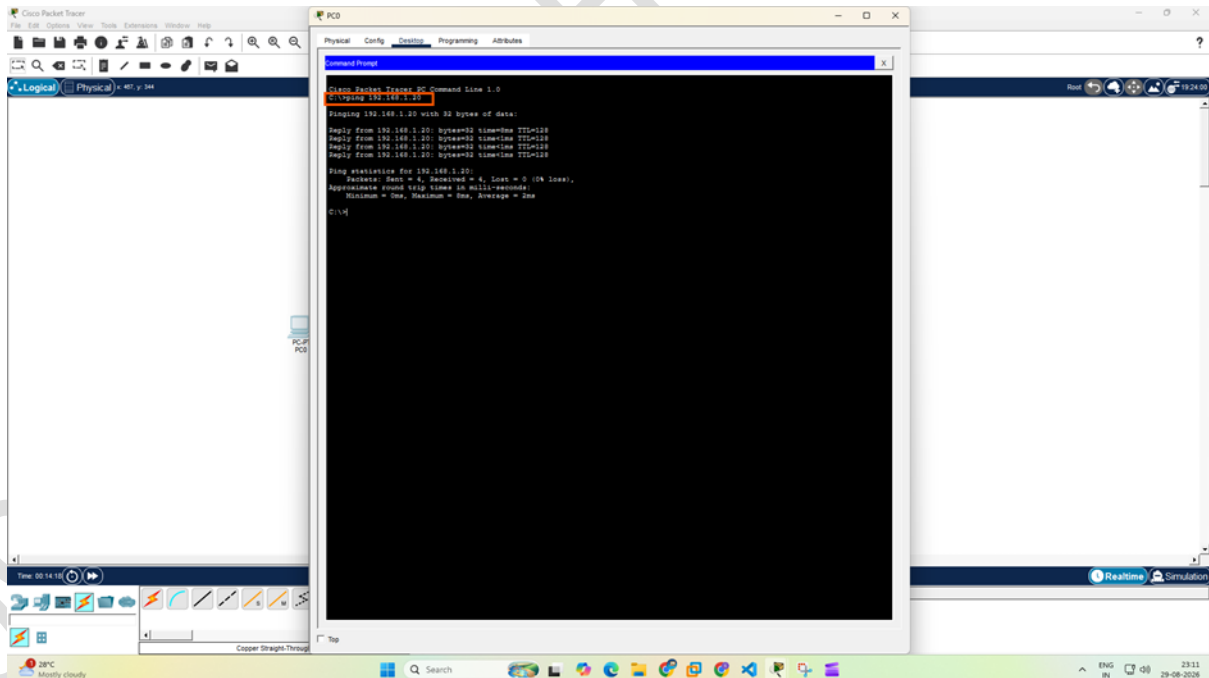


Step 5: Go to **Server0** → **Services** → **HTTP** and turn **HTTP: ON** and **HTTPS: ON**.


The server will now support **HTTP (Port 80)** and **HTTPS (Port 443)**.

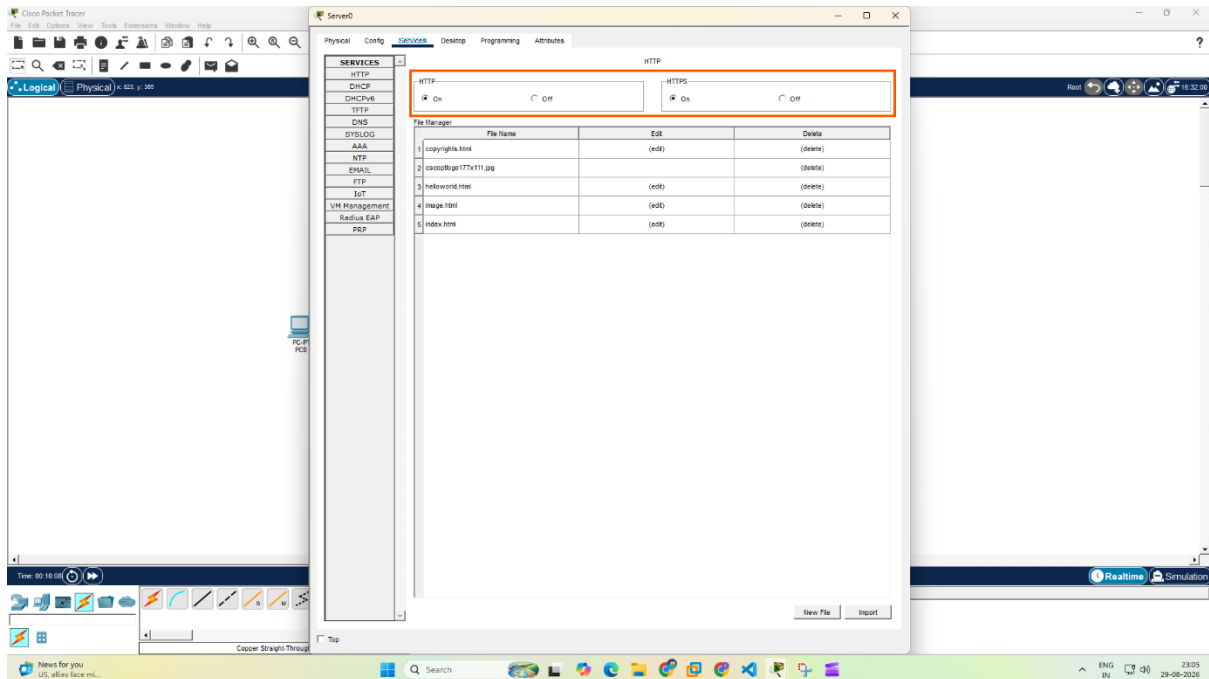


Step 6: Go to **Server0** → **Services** → **HTTP** and edit the HTML web page as needed.

Click **Save** to apply the changes.

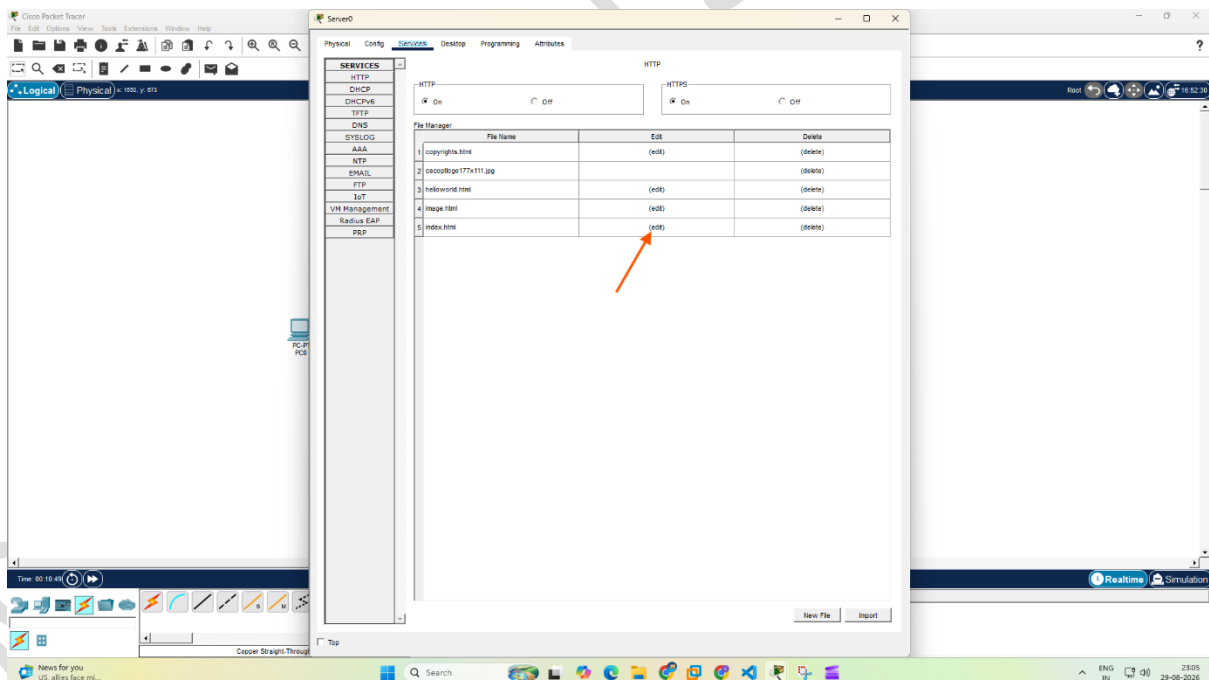

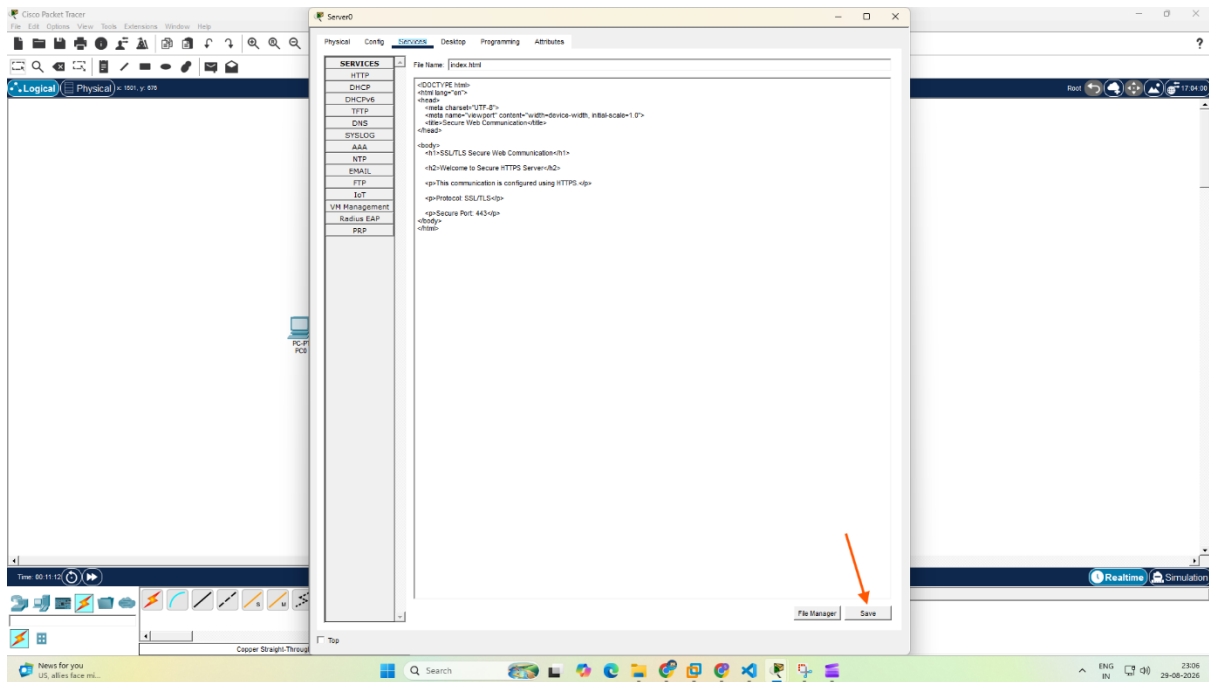

Step 7: Go to PC0 → Desktop → Web Browser and enter <https://192.168.1.20>.
If the web page opens, HTTP communication is working on **Port 443**.

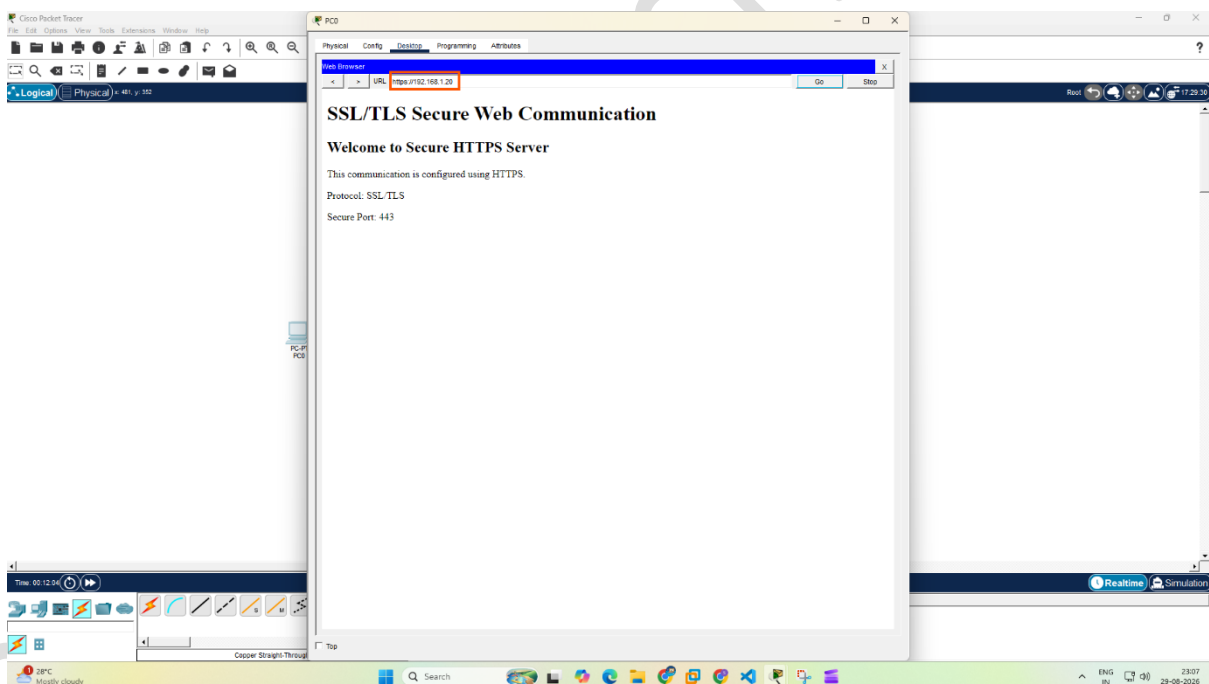

Step 8: In Cisco Packet Tracer, switch from **Realtime** to **Simulation** mode using the bottom-right option. This allows you to **observe network communication step-by-step**.

