



Practical no 6

Aim: Configure IPsec on network devices to provide secure communication and protect against unauthorized access and attacks.


1-Network Topology:

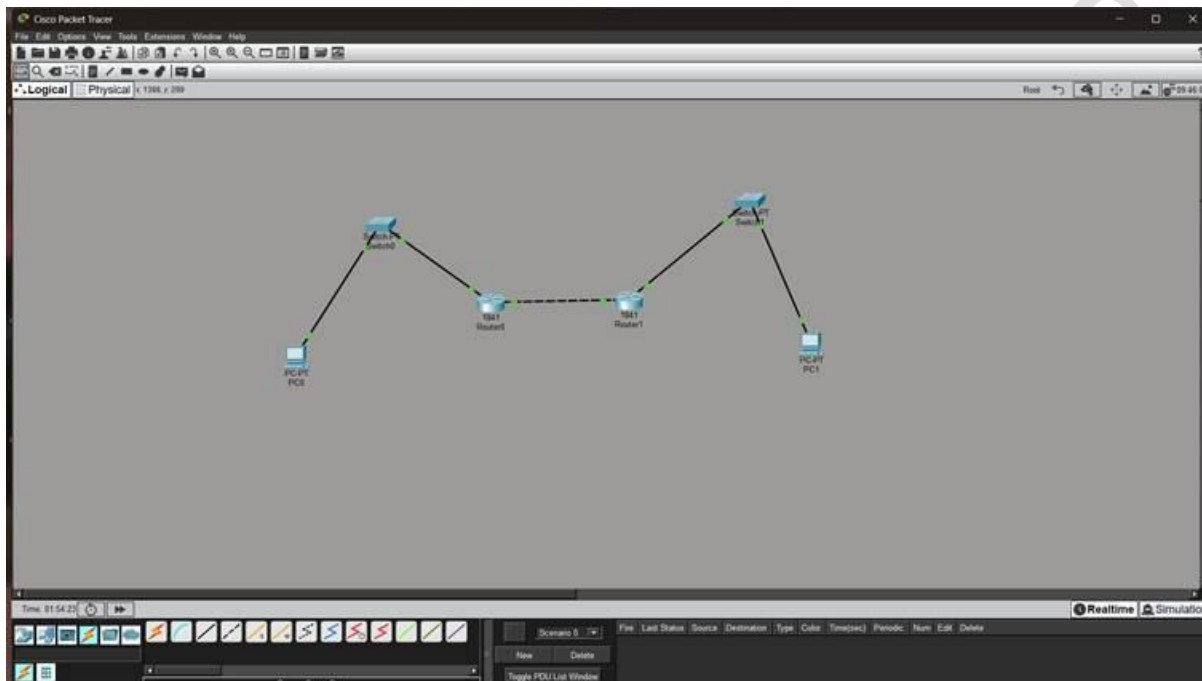

2: IP Configuration of PC0

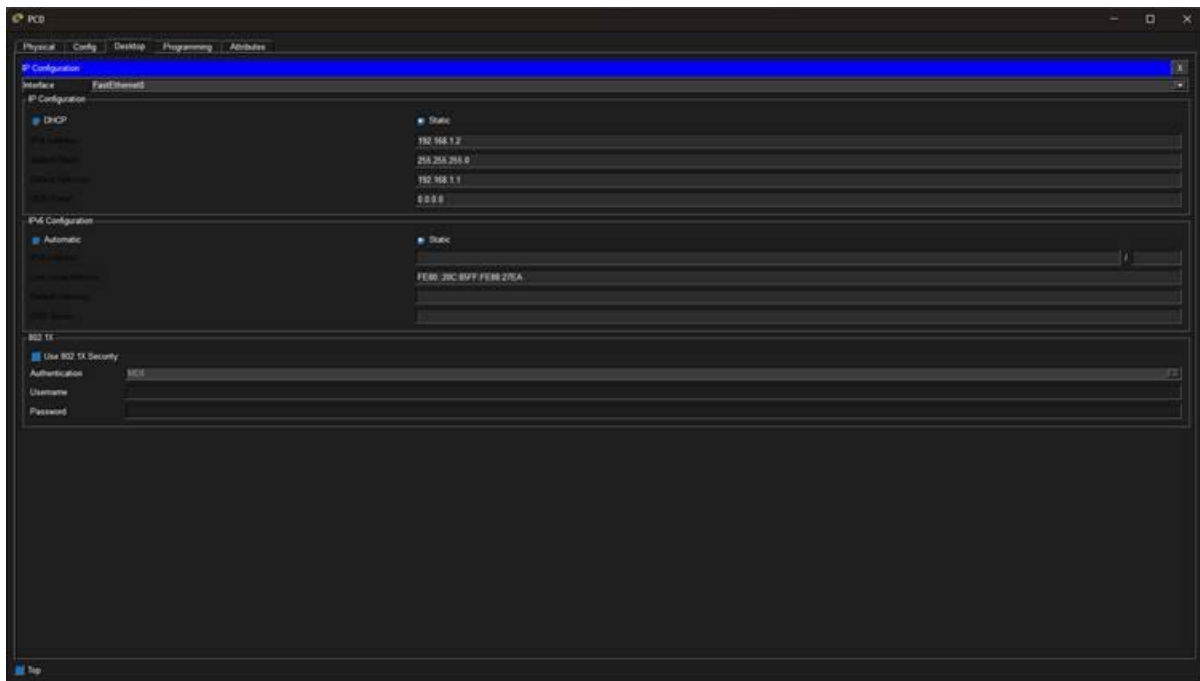

3: IP Configuration of PC1

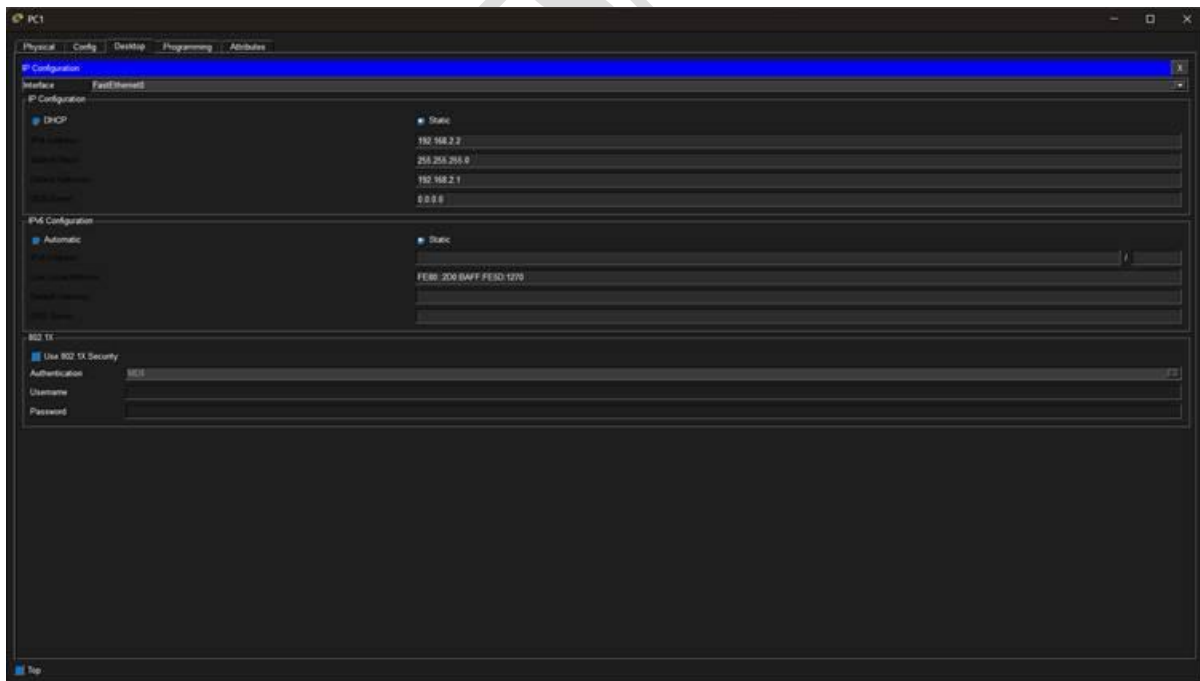

4: Router0 Configuration

```
Router0
Physical Config CLI Attributes
IOS Command Line Interface

Router#show running-config
Building configuration...

Current configuration: 955 bytes

version 12.4
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router0
!
!
!
ip nat
no ip nat
!
crypto keyring policy 10
  key size
  authentication sha-hmac
  group 1
crypto keyring key crypto123 address 10.0.0.2
!
crypto ipsec transform-set HEIST esp-esp esp-sha-hmac
crypto map VENDOR 10 ipsec-isakmp
  set peer 10.0.0.2
  set transform-set HEIST
  match address 100
!
!
spanning-tree mode rapid
!
!
interface FastEthernet0/0
  ip address 192.168.1.1 255.255.255.0
  duplex auto
  speed auto
```

```
Router0
Physical Config CLI Attributes
IOS Command Line Interface

crypto map VENDOR 10 ipsec-isakmp
  set peer 10.0.0.2
  set transform-set HEIST
  match address 100
!
!
spanning-tree mode rapid
!
!
interface FastEthernet0/0
  ip address 192.168.1.1 255.255.255.0
  duplex auto
  speed auto
interface FastEthernet0/1
  ip address 10.0.0.1 255.255.255.252
  duplex auto
  speed auto
  crypto map VENDOR
interface Vlan1
  no ip address
  shutdown
!
ip classful
ip route 192.168.2.0 255.255.255.0 10.0.0.2
ip flow-export version 9
!
router ospf 100
  router-id 192.168.1.1
  network 10.0.0.0 0.0.0.255 area 0
!
!
link ssn 0
link ssn 0
link vty 0-4
login
!
end
```

[illegible]

