
XH-M601 Battery Charging Control Board 12V

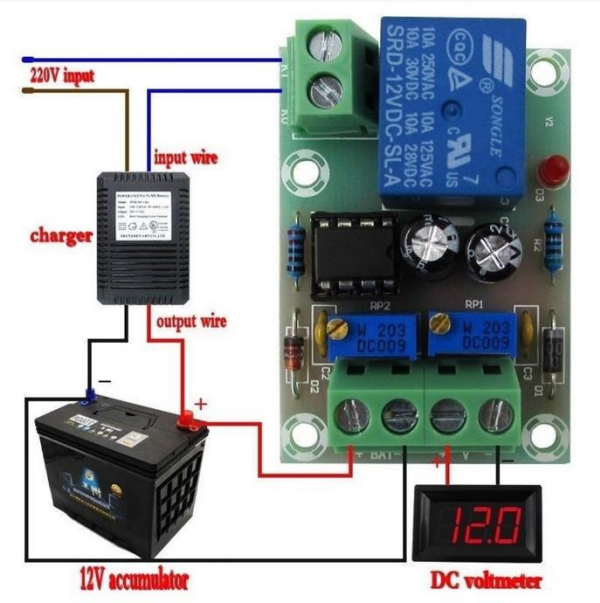

Product Introduction:
1.Name:12V charger power control board
2.Model:XH-M601
3.Power Supply Voltage:13.8-14.8V
4.Relay Operating Voltage:12.4V
5.Relay Disconnect Voltage:14.8V
6.Voltage Tolerance:+/-0.1V
7.Voltage Detection Way: DC voltmeter
8.Charging Type:12V storage battery
9.Potentiometer Adjustment:RP1 RP2
10.Size:50*32*18mm
Potentiometer Adjustment:
1.RP1:adjust storage battery start charging voltage (low voltage setting: clockwise becomes higher, counter-clockwise becomes lower)
2.RP2:adjust storage battery disconnect charging voltage (low voltage setting: clockwise becomes higher, counter-clockwise becomes lower**)**