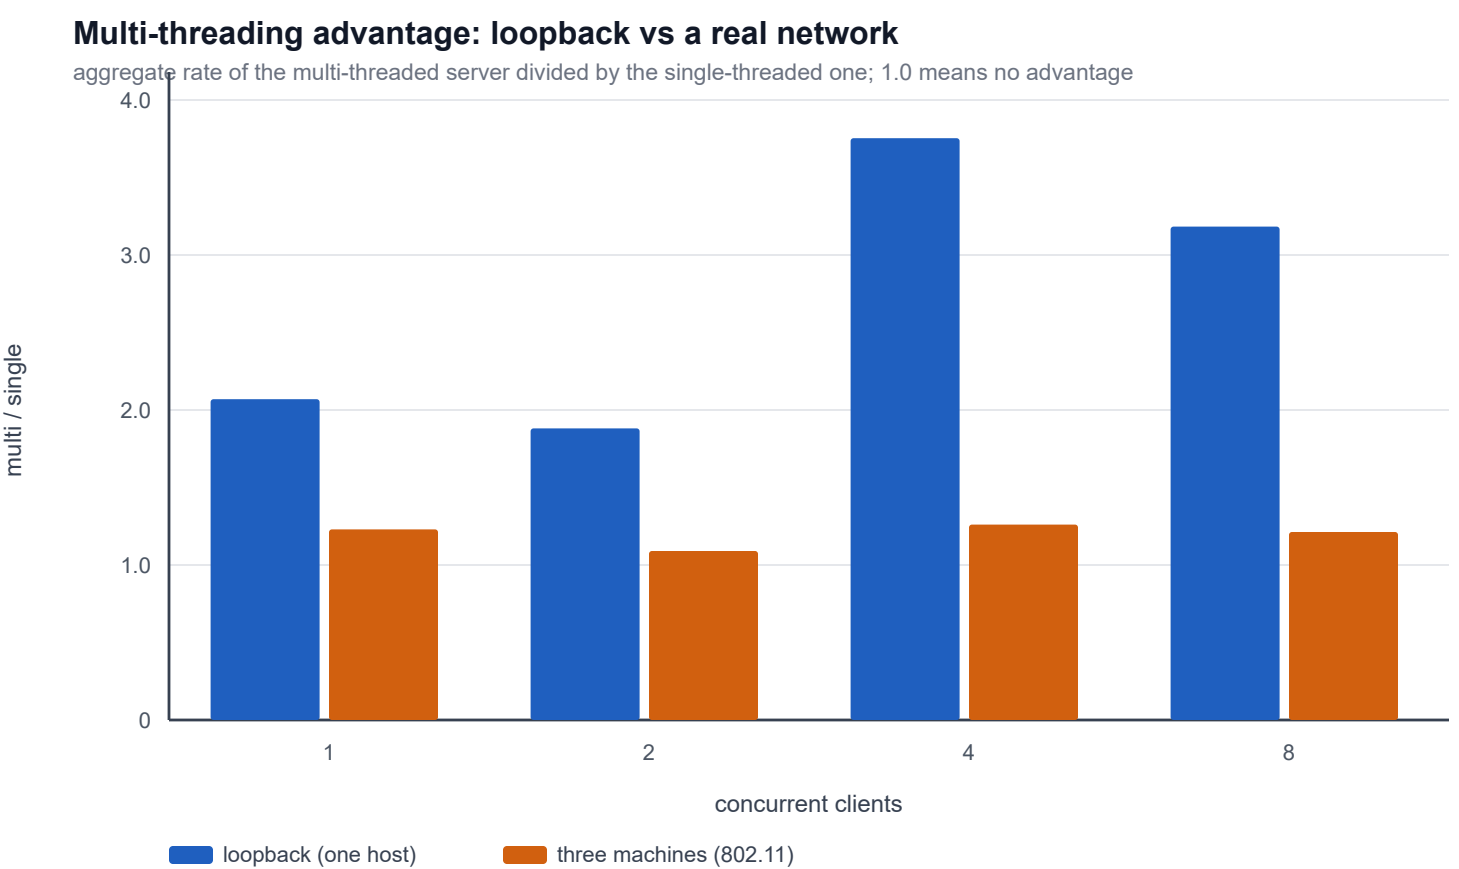
Multi-threading advantage: loopback vs a real network
aggregate rate of the multi-threaded server divided by the single-threaded one; 1.0 means no advantage
multi / single
4.0
3.0
2.0
1.0
0
1
2
4
8
concurrent clients
loopback (one host)
three machines (802.11)