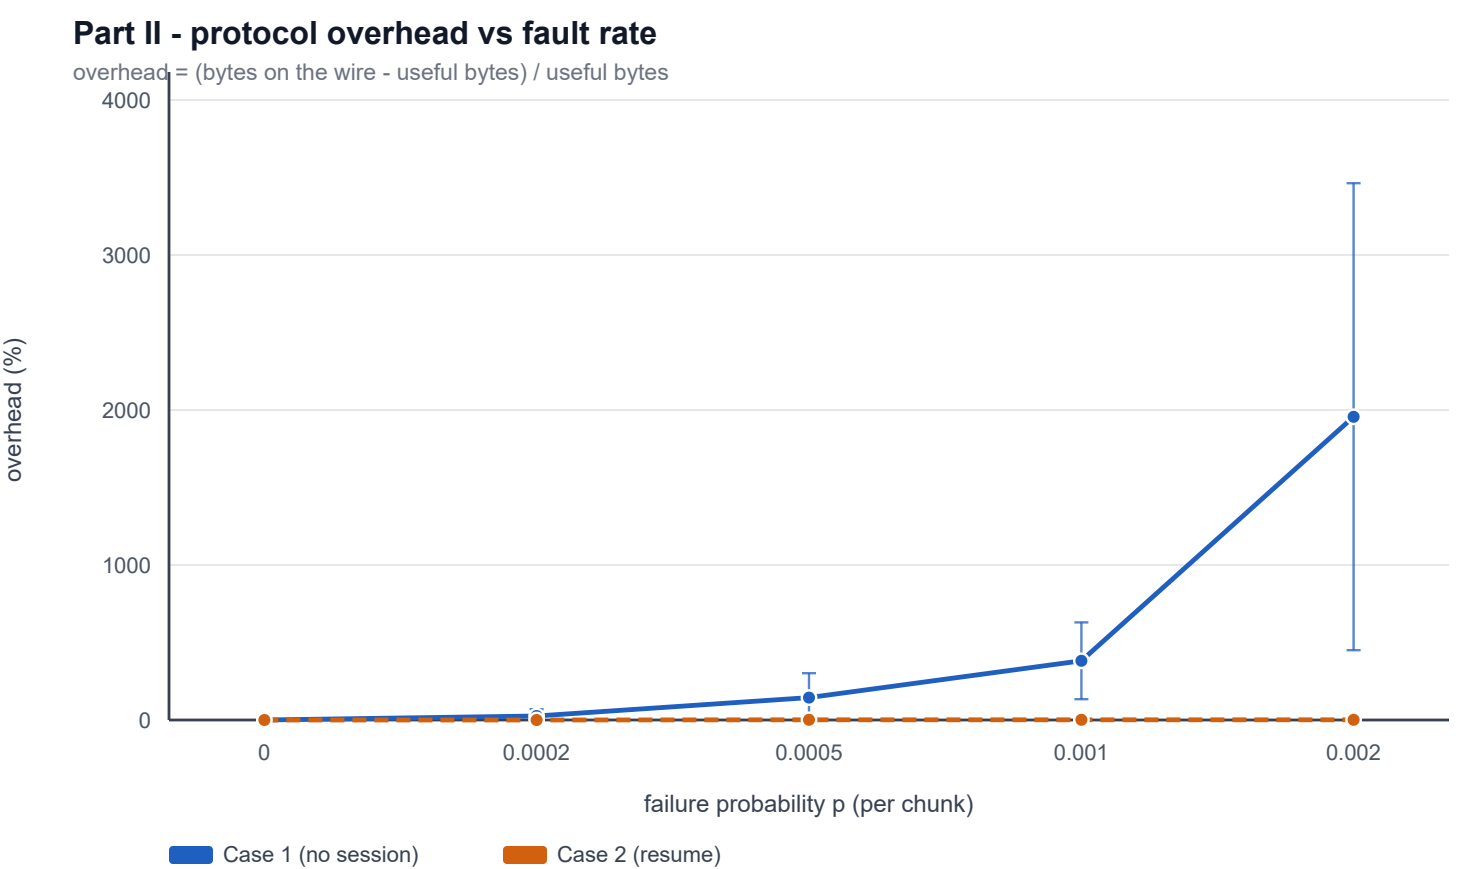
Part II - protocol overhead vs fault rate
overhead = (bytes on the wire - useful bytes) / useful bytes
overhead (%)
4000
3000
2000
1000
0
0
0.0002
0.0005
0.001
0.002
failure probability p (per chunk)
Case 1 (no session)
Case 2 (resume)