


Configuring IP address to router using Cisco Packet Tracer

1. Topology creation

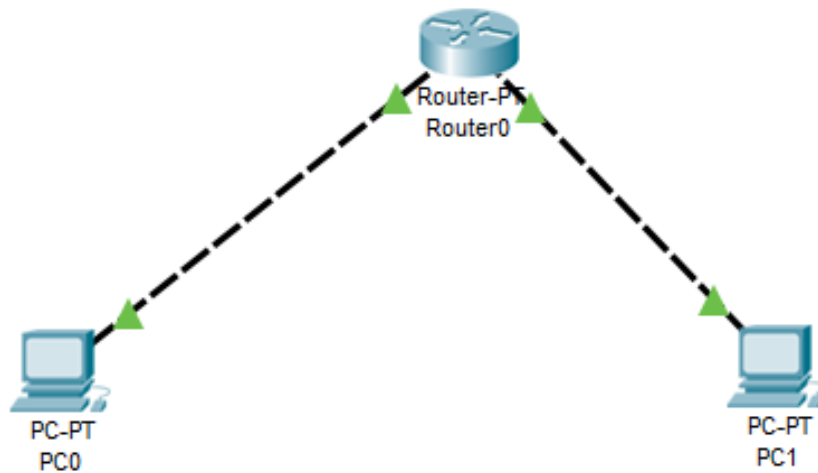

2. Assigning gateways and IP addresses to each of the end devices in the network.

3. Router configuration - This can be done by executing a set of commands in the Router CLI.

Commands: Configuring IP address in PC0

- Router> enable
- Router# config t
- Router(config)# interface fastEthernet 0/0
- Router(config if)# ip address 10.0.0.1 255.0.0.0
- Router(config if)# no shut

4. Once the router is configured, a simple PDU is sent from PC0 to PC1.