


Configuring IP address to Routers in Packet Tracer.

Explore the following messages: Ping Responses, Destination unreachable, Request timed out, Reply

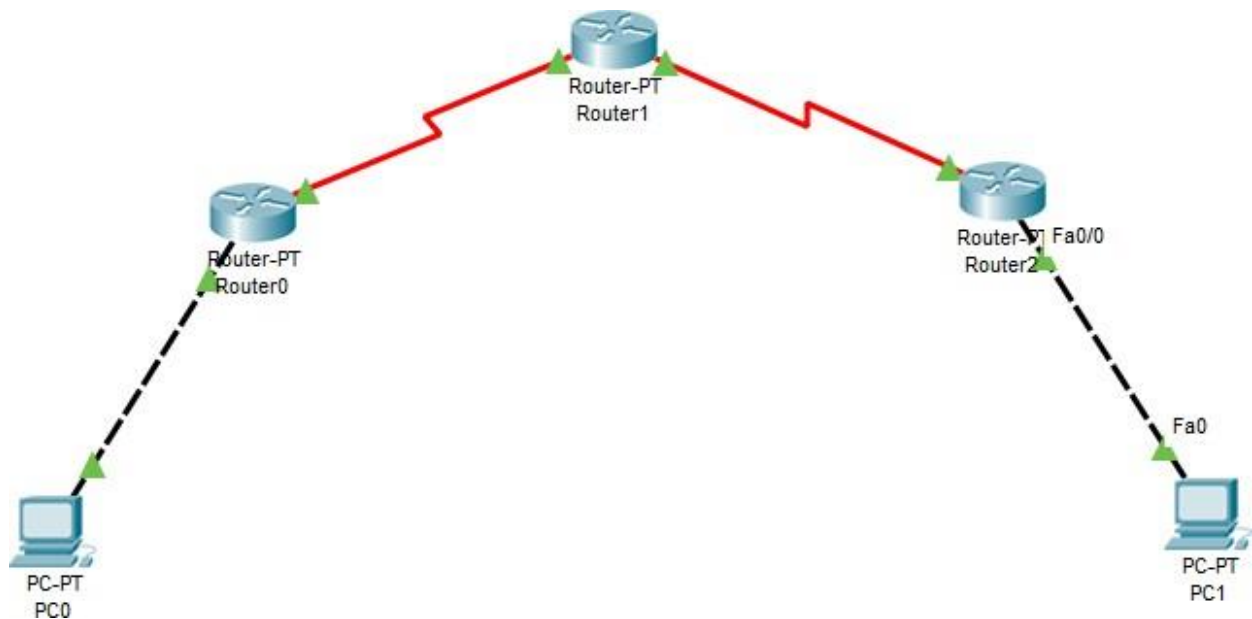

1. Gateway and IP addresses are set to PC0 and PC1.
2. The Router0 is configured so that indirect link to Router2 and PC1 is established.
3. Similarly, Router1 and Router2 are configured to establish indirect links to PC0, PC1 and PC0, Router0.
4. Now, ping the receiver's (PC0) IP address in sender's (PC1) Terminal to send a message packet of 32 bytes.
Command(PC1): ping 40.0.0.10
5. The transmission rate is 75% when pinged initially. Next time when pinged, the transmission rate will be 100% if the routers are correctly configured.