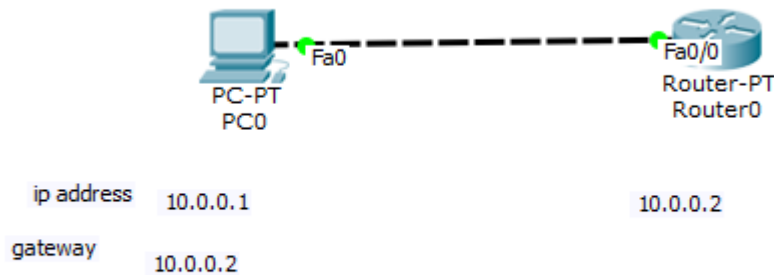# EXPERIMENT: 5

AIM: To understand the operation of TELNET by accessing the router in server room from a PC in IT office.

Topology:

Configuring Router:

Router0

Physical | Config | **CLI**

IOS Command Line Interface

```
Router(config)#interface FastEthernet0/0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to
up
ip address 10.0.0.2 255.0.0.0
Router(config-if)#exit
Router(config)#hostname R1
R1(config)#enable secret P0
R1(config)#line vty 0 5
R1(config-line)#login
% Login disabled on line 132, until 'password' is set
% Login disabled on line 133, until 'password' is set
% Login disabled on line 134, until 'password' is set
% Login disabled on line 135, until 'password' is set
% Login disabled on line 136, until 'password' is set
% Login disabled on line 137, until 'password' is set
R1(config-line)#password P1
R1(config-line)#exit
R1(config)#exit
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#wr
Building configuration...
[OK]
R1#
```

Copy | Paste

PC0

Physical | Config | **Desktop** | Custom Interface

Command Prompt   X

```
Packet Tracer PC Command Line 1.0
PC>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Reply from 10.0.0.2: bytes=32 time=0ms TTL=255
Reply from 10.0.0.2: bytes=32 time=0ms TTL=255
Reply from 10.0.0.2: bytes=32 time=0ms TTL=255
Reply from 10.0.0.2: bytes=32 time=0ms TTL=255

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

PC>telnet 10.0.0.2
Trying 10.0.0.2 ...Open


User Access Verification

Password:
R1>enable
Password:
R1#
```