


EXPERIMENT - 3

AIM: To demonstrate the configuration of default routes to the router.

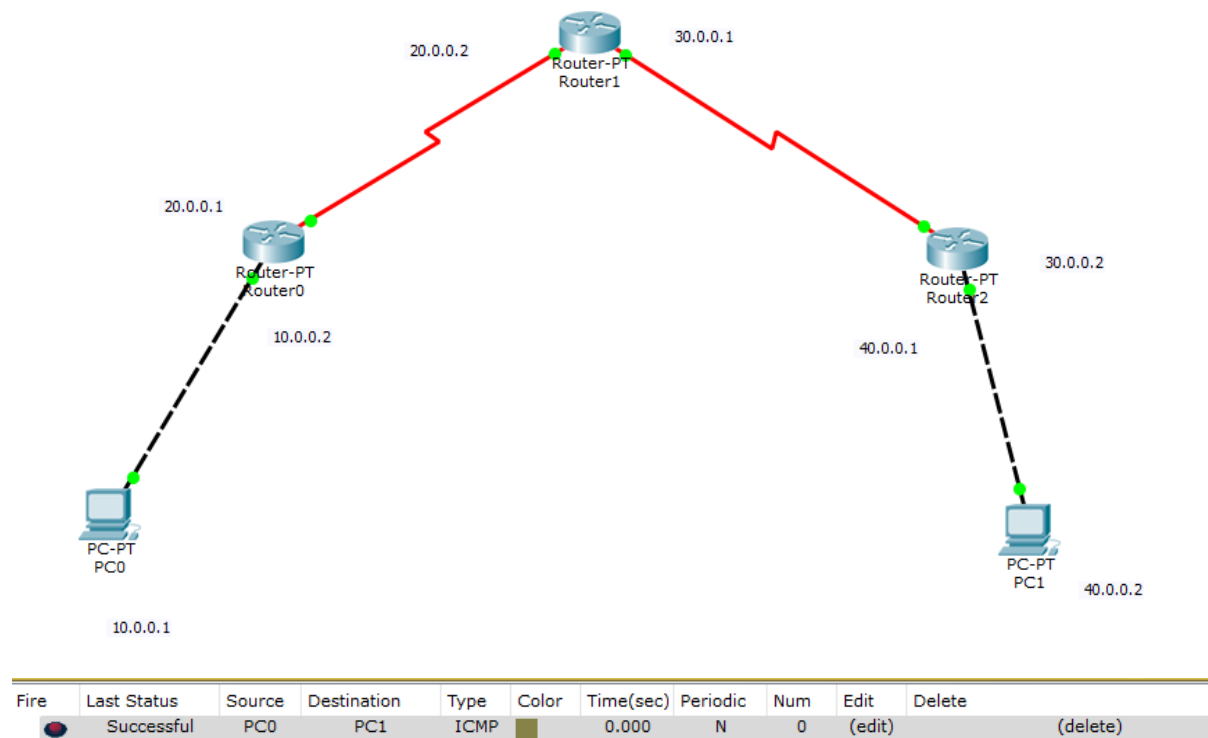

```
PC0
Physical Config Desktop Custom Interface
Command Prompt
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
PC>ping 40.0.0.2
Pinging 40.0.0.2 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 40.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
PC>ping 40.0.0.2
Pinging 40.0.0.2 with 32 bytes of data:
Reply from 40.0.0.2: bytes=32 time=9ms TTL=125
Reply from 40.0.0.2: bytes=32 time=8ms TTL=125
Reply from 40.0.0.2: bytes=32 time=9ms TTL=125
Reply from 40.0.0.2: bytes=32 time=7ms TTL=125
Ping statistics for 40.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 7ms, Maximum = 9ms, Average = 8ms
PC>
```