




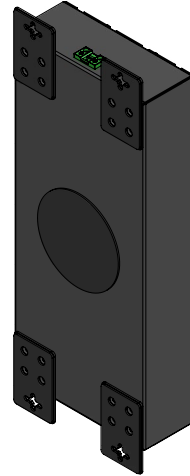

CINEMATIELIER™ COLLECTION

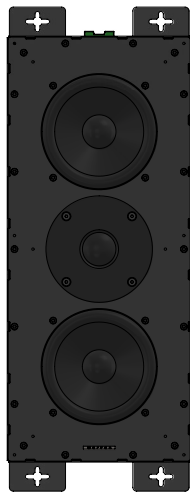

**SCAN OR CLICK TO EXTEND
YOUR GARVAN WARRANTY FOR FREE!**

3 years included, with the option to add
2 extra years at no additional cost.

OVERVIEW DESCRIPTION – UNIQUE DESCRIPTION PRODUCT

The Garvan KA313H is a high-performance 2-way loudspeaker from the CinemAtelier™ Collection, designed for on-wall and on-ceiling installation in premium audio and cinema environments. Equipped with dual 130 mm woofers and a 25 mm tweeter, it combines extended low-frequency response with detailed highs, ensuring a balanced, dynamic, and immersive listening experience. Its closed-box design and black lacquered metal cabinet guarantee durability, controlled resonance, and seamless integration into modern interiors. Perfect for home cinema, conference rooms, and multi-purpose spaces, the KA313H delivers both acoustic precision and architectural elegance.

KEY FEATURES

2-way configuration: dual 130 mm woofers + 25 mm tweeter

Power handling: 160 W AES / 320 W continuous

High sensitivity: 93 dB (2.83V/1m) / 90 dB (1W/1m)

Maximum SPL: 124 dB @ 1 m

Frequency response: 65 Hz – 20 kHz (–3 dB) with preset EQ

Wide dispersion: >120° (1–4 kHz) for uniform coverage

Closed-box cabinet: resonance-controlled design for clarity and precision


Construction: black lacquered metal cabinet with robust support

Installation versatility: suitable for concrete, plasterboard, wooden, and modular panel surfaces

Indoor use with Phoenix connectors supporting 18 AWG to 11 AWG cables

Weight: 3.66 kg – compact and easy to mount

Extended warranty: 3+1+1 years with free registration



NAME INSTALLATION	CinemaAtelier
Type Installation	On-Wall / On-Ceiling Speaker, closed box
Surface Compatibility	Suitable for installation in, concrete wall, Plasterboard, wooden panels, modular panel, and similar.
Installation Requirements:	Support thickness suitable for product weight
SINGLE LOUDSPEAKER PERFORMANCE	
AES Power Handling	160 W
Continuous Power Handling ***	320 W
Sensitivity 2,83V / 1m ****	93 dB
Sensitivity 1W/1m ****	90 dB
Calculated Maximum SPL @ 1m*	124 dB
TRANSDUCER	
Type	2 Way
Nominal size	2x WF 130 mm + TW 25mm
Nominal Impedance	4Ω
Loudspeaker EQ	Not required, Garvan Preset EQ, Filter and protection available
Recommended High-Pass Filter Protection	55 Hz with 48 dB/Oct. Hight pass Filter
Frequency Response (-3 dB)	65 Hz – 20 kHz **
Frequency Range (-10 dB)	57 Hz - 20 kHz **
Nominal Coverage Angle (1 KHz - 4 kHz)	> 120°
Nominal Coverage (1 KHz – 10 kHz)	120
PHYSICAL	
Frame Material	Black lacquered metal cabinet
Speaker support Material	Black laquared metal support
Cover	NC
ENVIRONMENTAL FEATURES	
Enviropment of Use	Indoor environments
Operating Temperature Range *****	
environmental protection.	
Connectors	Phoenix connector. Accepts 18 AWG (0.8 mm2) to 11 AWG (4,17 mm2) size wire.
Maximum Ceiling Thickness	
Product Dimensions	
Ceiling Cutout	
Net Weight, Frame	
Net Weight, Loudspeaker	
Net Weight, Cover	

LOGISTICAL DATA			
Packaging dimensions			
Shipping Weight			
Quantity of products per package		1 to 2 based on logistics optimization per shipment	
MAINTENANCE			
Cleaning Method		microfiber cloth	
General precautions		do not use harsh cleaning products	
INCLUDED ACCESSORIES			
OPTIONAL ACCESSORIES			
Transformer for hight line voltage		TRT052 – 70/100V - 25/37/50W	
Transformer for hight line voltage		TRT054 – 70/100V - 10/15/20W	
Cover installation kit		GAR136	
Cable size/load	8 ohm	4 ohm	2 ohm
2 sq mm.	20m / 65ft.	10m / 32ft	5m / 16ft
2,5 sq mm.	30m / 100ft.	15m / 50ft	7,5m / 25ft
4 sq mm.	60m / 200ft.	30m / 100ft	15m / 50ft
NOTES:			

* Maximum SPL calculated from sensitivity and power handling specifications, using a signal with crest factor 4 (12dB), exclusive of power compression.

** With dedicated preset

*** Power on Continuous Program is defined as 3 dB greater than the Nominal rating.



**** average SPL measured from 200 Hz to 1,5 kHz

***** With dedicated ignition and maintenance process


CINEMA CODES

1 Loudspeaker **KA313H**


AES POWER **160 W**
TYPE **2 WAY**
NOM. SIZE **WF 130 mm + TW 25 mm**
NOM. IMP. **8Ω**

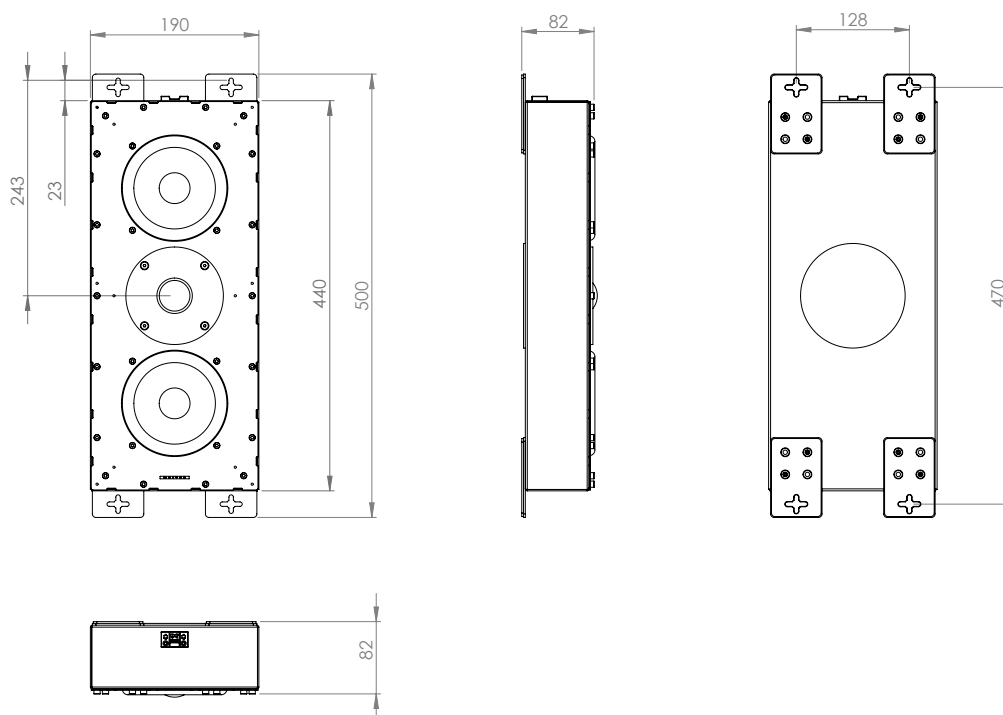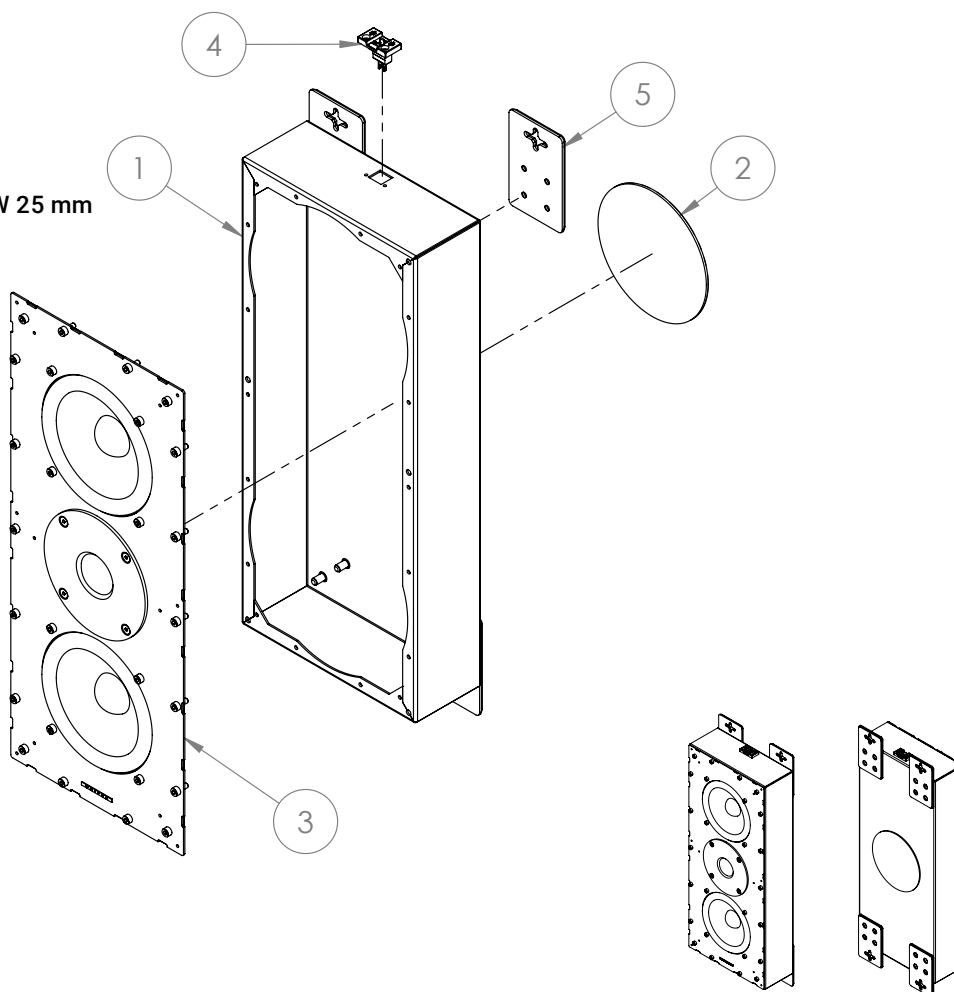


INSTALLATION INSTRUCTIONS **KA313H Cinema**




1 Jig set

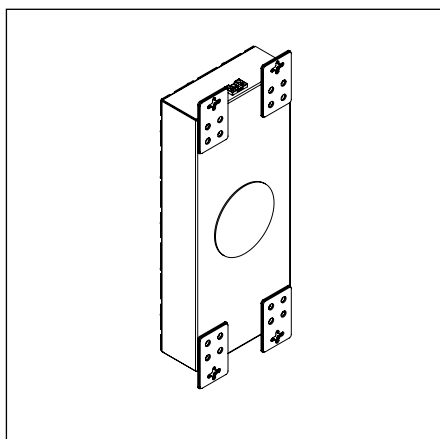


2

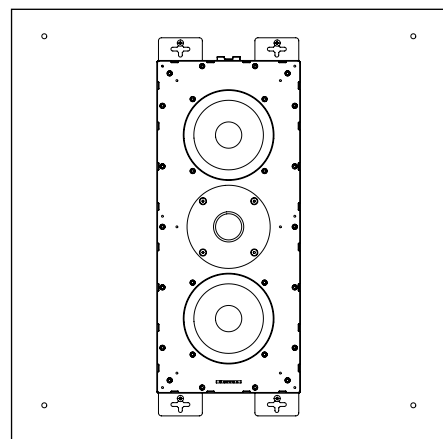


3

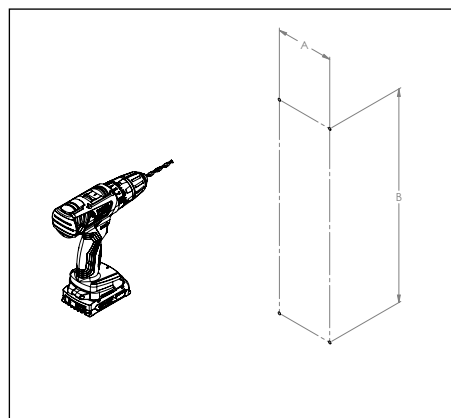


4

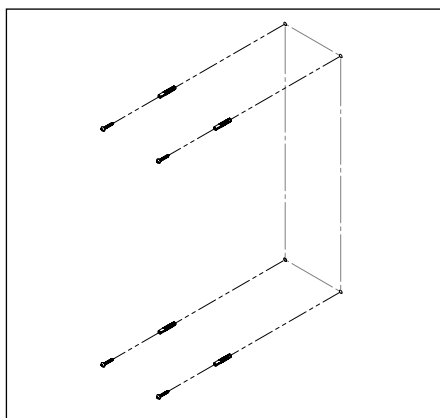


5

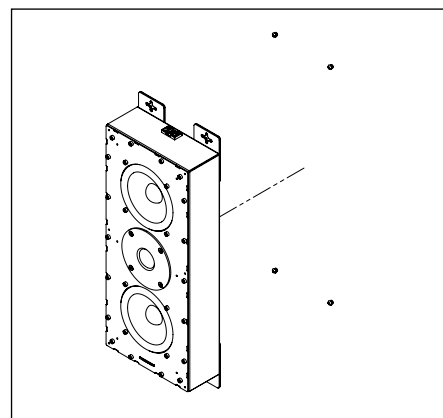


6

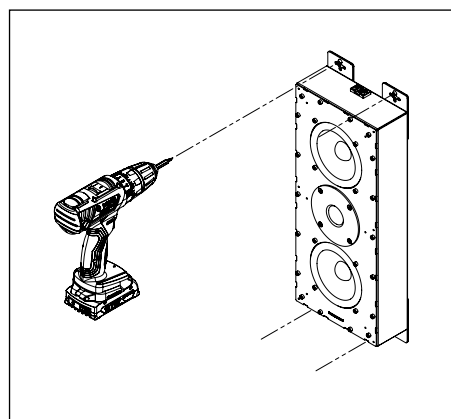


7

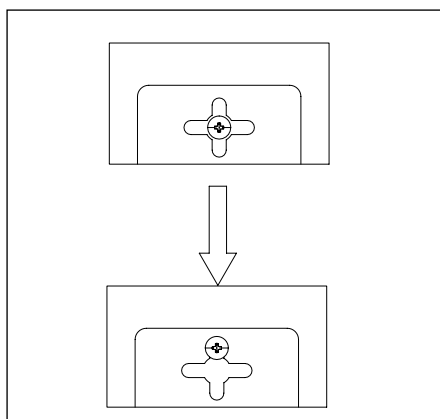


8

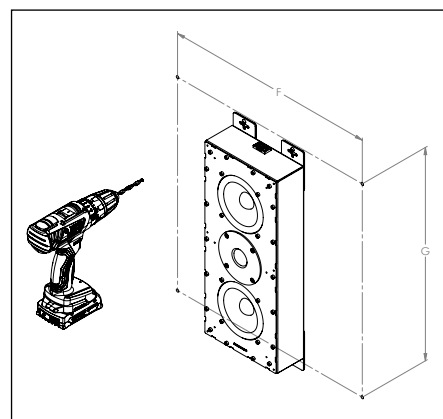

9

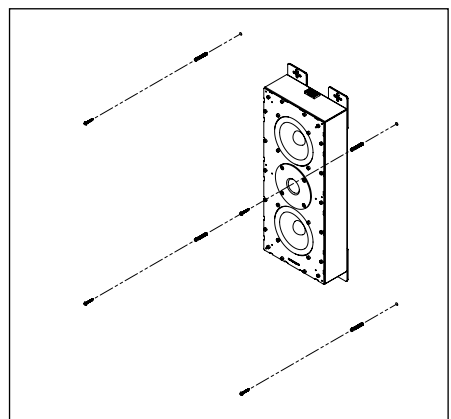

10

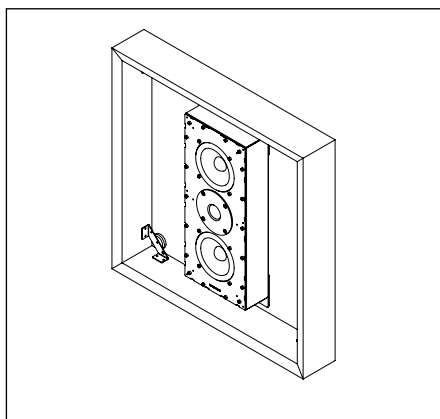

11