



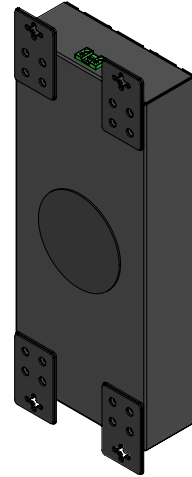

CINEMATIELIER™ COLLECTION

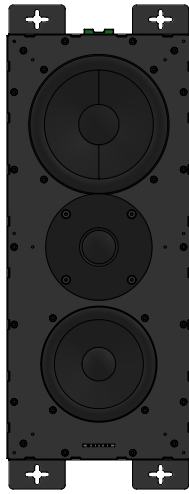

**SCAN OR CLICK TO EXTEND
YOUR GARVAN WARRANTY FOR FREE!**

3 years included, with the option to add
2 extra years at no additional cost.

OVERVIEW DESCRIPTION – UNIQUE DESCRIPTION PRODUCT

The Garvan KA316H is a refined 2-way loudspeaker from the CinemAtelier™ Collection, designed for on-wall and on-ceiling installations where performance and aesthetics must work together seamlessly. Featuring a 130 mm woofer, a 25 mm tweeter, and a 160 mm passive radiator in a closed-box configuration, it delivers deep bass, accurate mids, and crystal-clear highs with wide coverage. The KA316H combines Made in Italy craftsmanship with durable black lacquered metal construction, ensuring both long-lasting reliability and architectural integration. Ideal for home cinema, conference rooms, and multi-purpose interiors, it provides immersive sound with elegant discretion.

KEY FEATURES

2-way closed-box loudspeaker with 130 mm woofer, 25 mm tweeter, and 160 mm passive radiator

Power handling: 80 W AES / 160 W continuous

Sensitivity: 87.5 dB (2.83V/1m and 1W/1m)

Maximum SPL: 118.5 dB @ 1 m

Frequency response: 60 Hz – 20 kHz (–3 dB) with preset EQ

Wide coverage: >120° (1–4 kHz) for uniform sound dispersion


Cabinet construction: black lacquered metal with robust support structure

Installation versatility: suitable for concrete walls, plasterboard, wooden, and modular panels

Indoor application with Phoenix connector, supporting 18 AWG to 11 AWG cables

Lightweight design: 3.61 kg for easy mounting

Extended warranty: 3+1+1 years with free registration



NAME INSTALLATION	CinemaAtelier
Type Installation	On-Wall / On-Ceiling Speaker, closed box
Surface Compatibility	Suitable for installation in, concrete wall, Plasterboard, wooden panels, modular panel, and similar.
Installation Requirements:	Support thickness suitable for product weight
SINGLE LOUDSPEAKER PERFORMANCE	
AES Power Handling	80 W
Continuous Power Handling ***	160 W
Sensitivity 2,83V / 1m ****	87,5 dB
Sensitivity 1W/1m ****	87,5 dB
Calculated Maximum SPL @ 1m*	118,5 dB
TRANSDUCER	
Type	2 Way
Nominal size	WF 130 mm + TW 25mm + RP 160mm
Nominal Impedance	8Ω
Loudspeaker EQ	Not required, Garvan Preset EQ, Filter and protection available
Recommended High-Pass Filter Protection	40 Hz with 48 dB/Oct. Hight pass Filter
Frequency Response (-3 dB)	60 Hz – 20 kHz **
Frequency Range (-10 dB)	48 Hz - 20 kHz **
Nominal Coverage Angle (1 KHz - 4 kHz)	> 120°
Nominal Coverage (1 KHz – 10 kHz)	120
PHYSICAL	
Frame Material	Black lacquered metal cabinet
Speaker support Material	Black laquared metal support
Cover	NC
ENVIRONMENTAL FEATURES	
Enviropment of Use	Indoor environments
Operating Temperature Range *****	
environmental protection.	
Connectors	Phoenix connector. Accepts 18 AWG (0.8 mm2) to 11 AWG (4,17 mm2) size wire.
Maximum Ceiling Thickness	
Product Dimensions	
Ceiling Cutout	
Net Weight, Frame	
Net Weight, Loudspeaker	
Net Weight, Cover	

LOGISTICAL DATA				
Packaging dimensions				
Shipping Weight				
Quantity of products per package			1 to 2 based on logistics optimization per shipment	
MAINTENANCE				
Cleaning Method			microfiber cloth	
General precautions			do not use harsh cleaning products	
INCLUDED ACCESSORIES				
OPTIONAL ACCESSORIES				
Transformer for hight line voltage			TRT052 – 70/100V - 25/37/50W	
Transformer for hight line voltage			TRT054 – 70/100V - 10/15/20W	
Cover installation kit			GAR136	
Cable size/load	8 ohm	4 ohm	2 ohm	
2 sq mm.	20m / 65ft.	10m / 32ft	5m / 16ft	
2,5 sq mm.	30m / 100ft.	15m / 50ft	7,5m / 25ft	
4 sq mm.	60m / 200ft.	30m / 100ft	15m / 50ft	
NOTES:				

* Maximum SPL calculated from sensitivity and power handling specifications, using a signal with crest factor 4 (12dB), exclusive of power compression.

** With dedicated preset

*** Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

**** average SPL measured from 200 Hz to 1,5 kHz

***** With dedicated ignition and maintenance process

CINEMA CODES



1 Loudspeaker **KA316H**

AES POWER **80 W**


TYPE **2 WAY**

NOM. SIZE **WF 130 mm + TW 25 mm + RP 160 mm**


NOM. IMP. **8Ω**

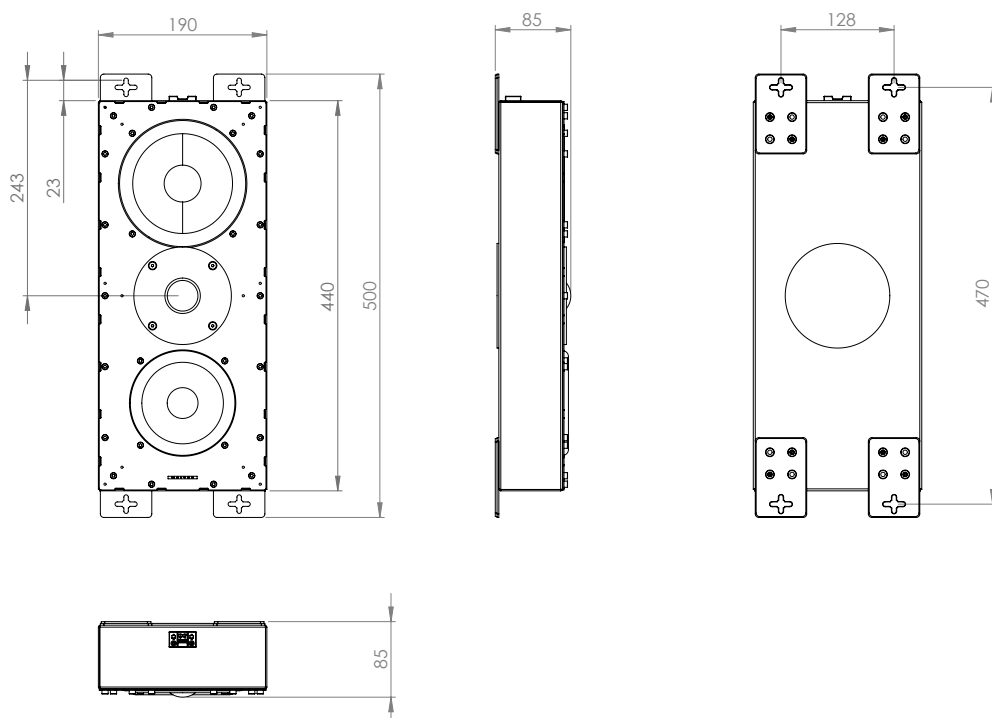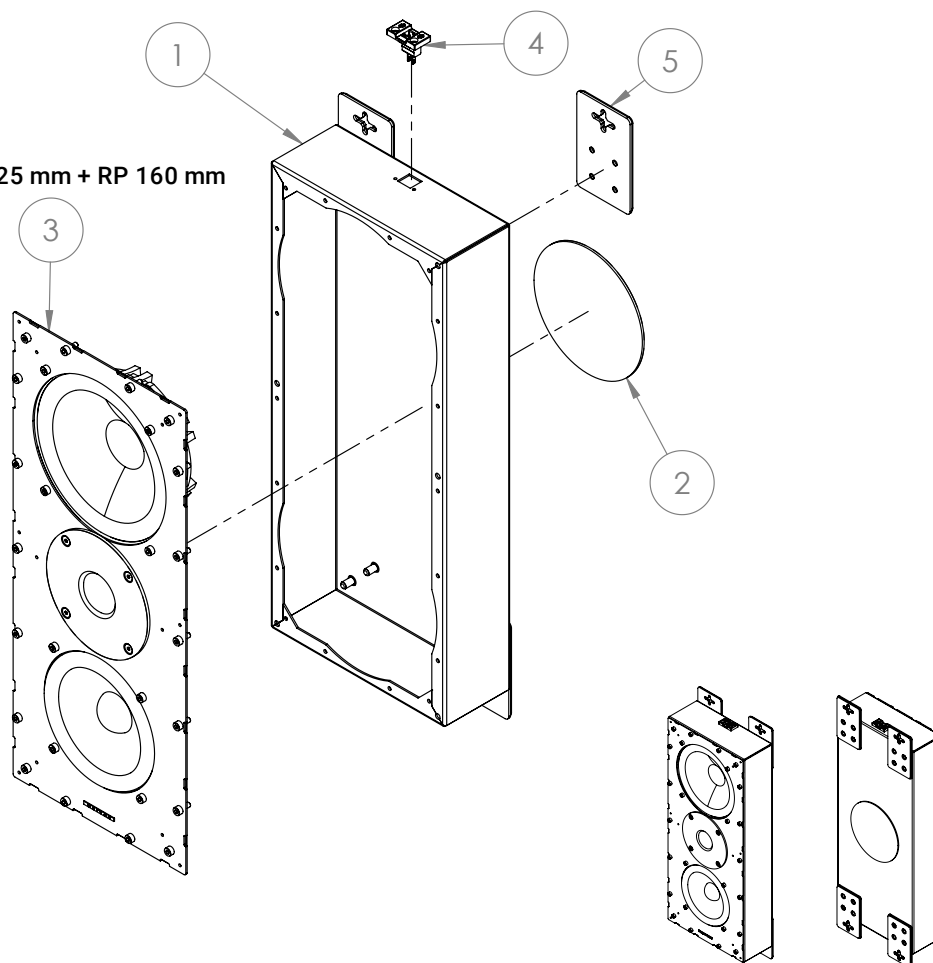


INSTALLATION INSTRUCTIONS **KA316H Cinema**




1 Jig set

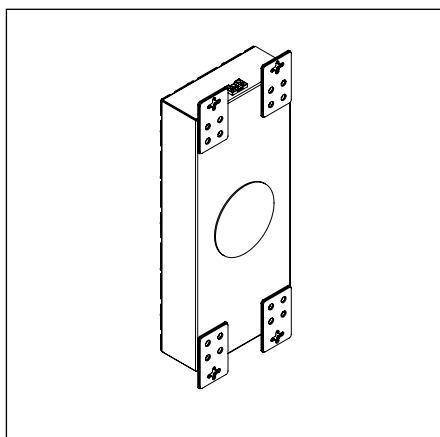


2

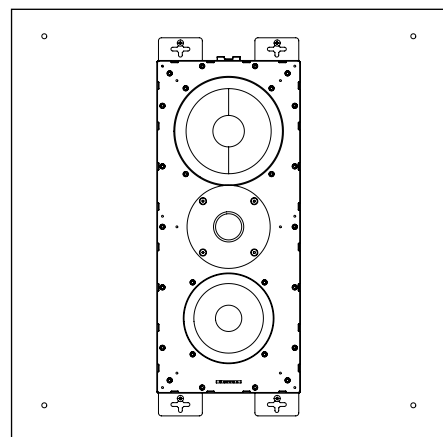


3

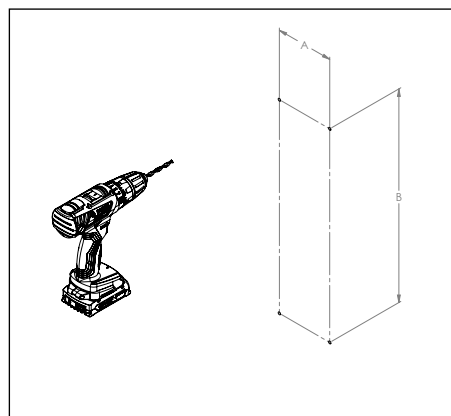


4

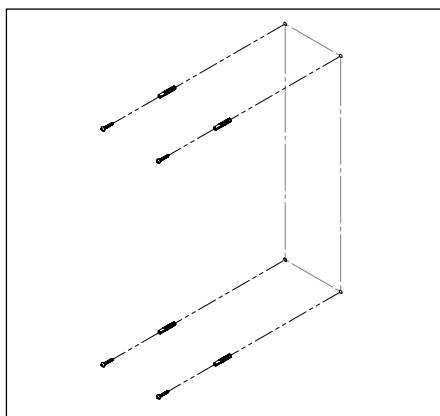


5

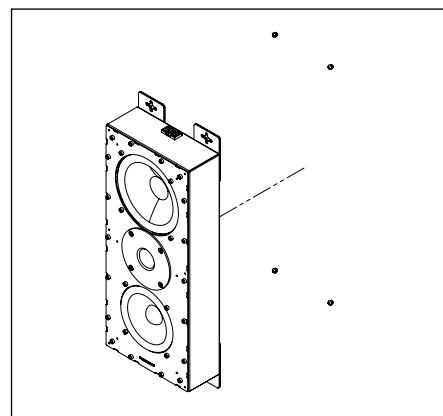


6

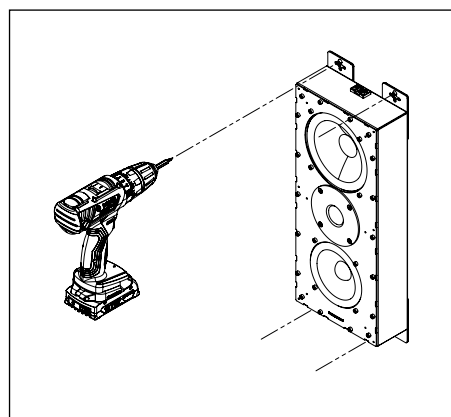


7

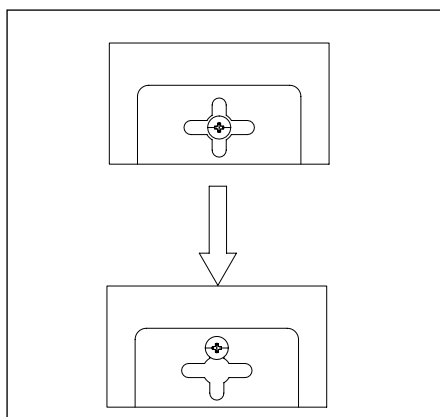


8

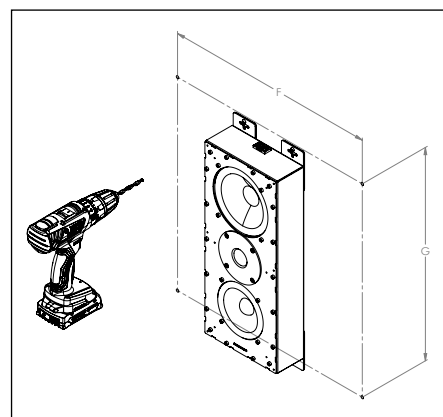

9

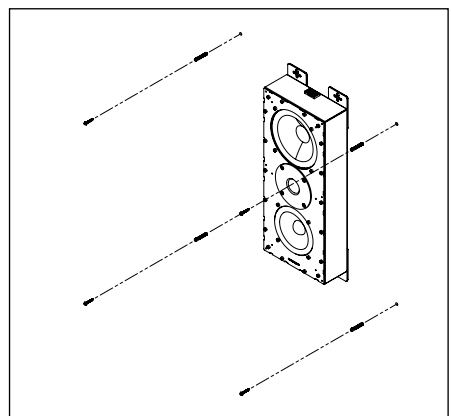

10

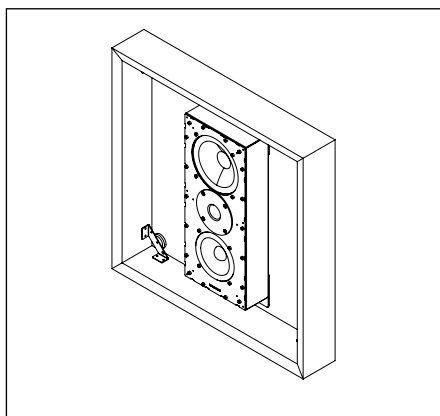

11