





CORO™ COLLECTION



**SCAN OR CLICK TO EXTEND
YOUR GARVAN WARRANTY FOR FREE!**

3 years included, with the option to add
2 extra years at no additional cost.

OVERVIEW DESCRIPTION – UNIQUE DESCRIPTION PRODUCT

The Garvan KW208 is a compact dual full-range loudspeaker from the Coro™ Collection, designed for on-wall and on-ceiling installation in modern indoor environments. Featuring two 76 mm drivers in a closed-box design, the KW208 provides balanced, natural sound with wide coverage and discreet integration. Its lacquered or satin-finish metal cabinet, combined with grille options in metal or fabric, ensures both durability and elegance. Lightweight yet powerful, the KW208 is ideal for residential, hospitality, and commercial spaces that require refined acoustics in a minimalist form factor.

KEY FEATURES

Dual full-range loudspeaker with 2 × 76 mm drivers

Power handling: 40 W + 40 W AES / 80 W + 80 W continuous

Sensitivity: 83.5 dB (2.83V/1m and 1W/1m per channel) / 89.5 dB combined

Maximum SPL: 111.5 dB per channel / 117.5 dB combined @ 1 m

Frequency response: 115 Hz – 16 kHz (–3 dB)

Extended range: 87 Hz – 20 kHz (–10 dB)

Coverage: >120° (1–4 kHz) / 90° (1–10 kHz)


Closed-box cabinet: lacquered or satin-finish metal with grille options in stainless steel or fabric

Installation compatibility: suitable for concrete, plasterboard, wooden, and modular panels

Indoor use with push connectors, accepts 18 AWG to 15 AWG wires

Lightweight build: 2.36 kg for easy mounting

Extended warranty: 3+1+1 years with free registration



NAME INSTALLATION	On-wall
Type Installation	On-Wall / On-Ceiling Speaker, closed box
Surface Compatibility	Suitable for installation in, concrete wall, Plasterboard, wooden panels, modular panel, and similar.
Installation Requirements:	Support thickness suitable for product weight
SINGLE LOUDSPEAKER PERFORMANCE	
AES Power Handling	40 W + 40 W
Continuous Power Handling ***	80 W + 80 W
Sensitivity 2,83V / 1m ****	83,5 dB + 83,5 dB
Sensitivity 1W/1m ****	83,5 dB + 83,5 dB / 89,5 dB
Calculated Maximum SPL @ 1m*	111,5 dB + 111,5 dB / 117,5 dB
TRANSDUCER	
Type	2x Full Range
Nominal size	2x 76mm
Nominal Impedance	8Ω + 8Ω
Loudspeaker EQ	Not required, Garvan Preset EQ, Filter and protection available
Recommended High-Pass Filter Protection	80 Hz with 48 dB/Oct. High pass Filter
Frequency Response (-3 dB)	115 Hz - 16 kHz **
Frequency Range (-10 dB)	87 Hz – 20 kHz **
Nominal Coverage Angle (1 KHz - 4 kHz)	> 120°
Nominal Coverage (1 KHz – 10 kHz)	90°
PHYSICAL	
Frame Material	lacquered metal cabinet, galvanic or satin-finish steel
Speaker support Material	Black laquered metal support
Cover	Laquered or galvanic metal Grille/ Brusced stainlenss steel Grille / Fabric covered frame.
ENVIRONMENTAL FEATURES	
Enviropment of Use	Indoor environments
Operating Temperature Range *****	
environmental protection.	
Connectors	Push connector, mounted on speaker. Accepts 18 AWG (0.8 mm ²) to 15 AWG (2,08 mm ²) size wire.
Maximum Ceiling Thickness	
Product Dimensions	
Ceiling Cutout	
Net Weight, Frame	
Net Weight, Loudspeaker	
Net Weight, Cover	

LOGISTICAL DATA			
Packaging dimensions			
Shipping Weight			
Quantity of products per package		1 to 2 based on logistics optimization per shipment	
MAINTENANCE			
Cleaning Method		microfiber cloth	
General precautions		do not use harsh cleaning products	
INCLUDED ACCESSORIES			
OPTIONAL ACCESSORIES			
Transformer for hight line voltage		TRT052 – 70/100V - 25/37/50W	
Transformer for hight line voltage		TRT054 – 70/100V - 10/15/20W	
Cover installation kit		GAR136	
Cable size/load	8 ohm	4 ohm	2 ohm
2 sq mm.	20m / 65ft.	10m / 32ft	5m / 16ft
2,5 sq mm.	30m / 100ft.	15m / 50ft	7,5m / 25ft
4 sq mm.	60m / 200ft.	30m / 100ft	15m / 50ft
NOTES:			

* Maximum SPL calculated from sensitivity and power handling specifications, using a signal with crest factor 4 (12dB), exclusive of power compression.

** With dedicated preset

*** Power on Continuous Program is defined as 3 dB greater than the Nominal rating.



**** average SPL measured from 200 Hz to 1,5 kHz


***** With dedicated ignition and maintenance process

ON-WALL CODES


1 Loudspeaker **KW208**
2 Frame **CW1919**
3 Front cover **11BXX**

AES POWER **40 W + 40 W**
TYPE **2X FULL RANGE**
NOM. SIZE **2X 76 mm**
NOM. IMP. **8Ω + 8Ω**

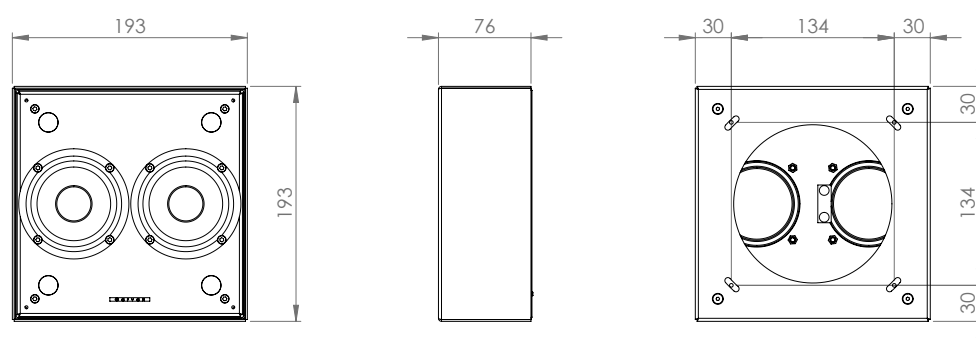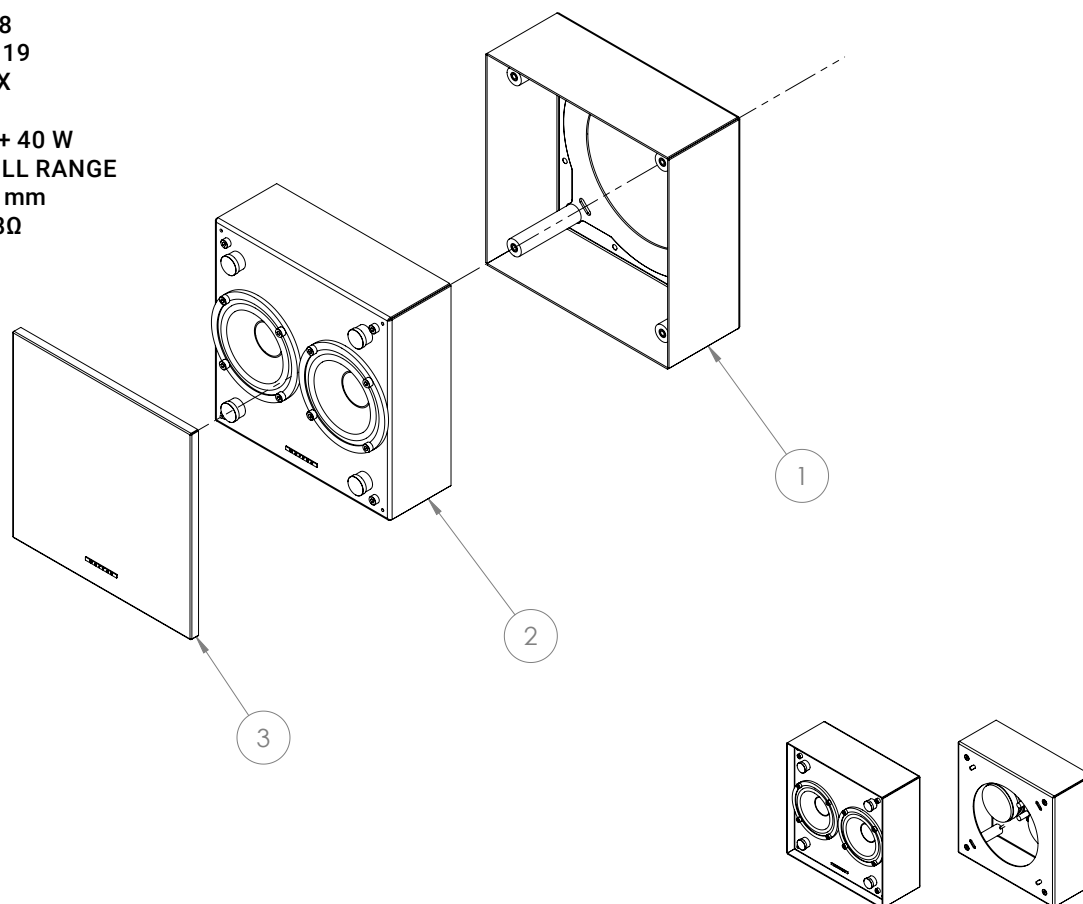





1 Jig set

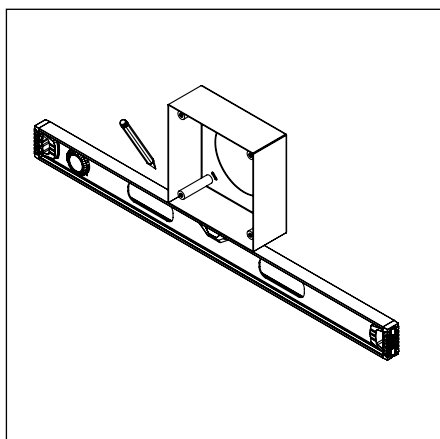


2

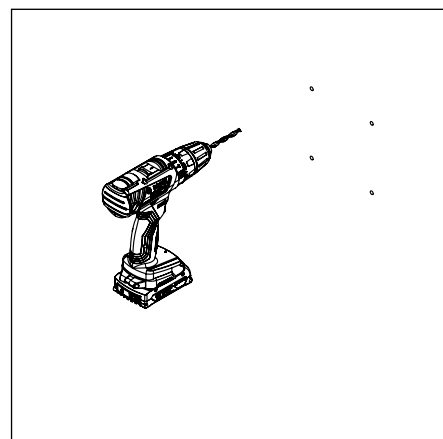


3

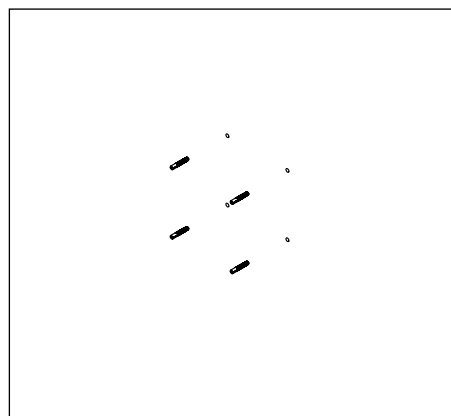


4

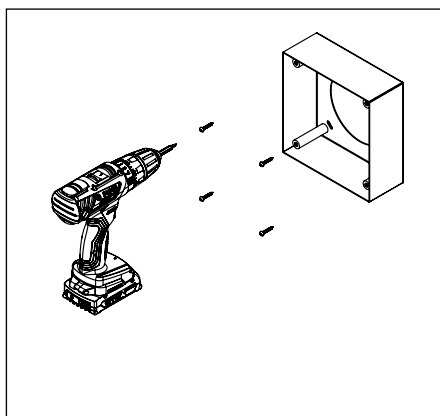


5

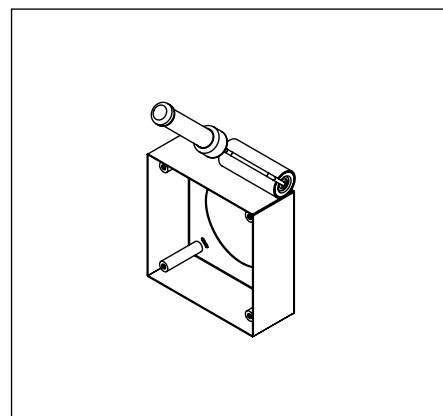


6

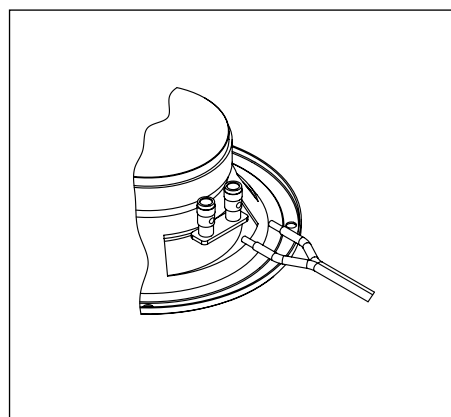


7

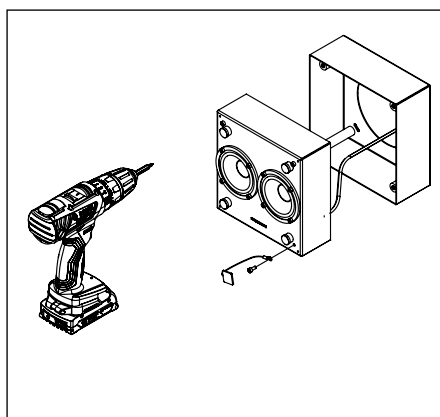


8

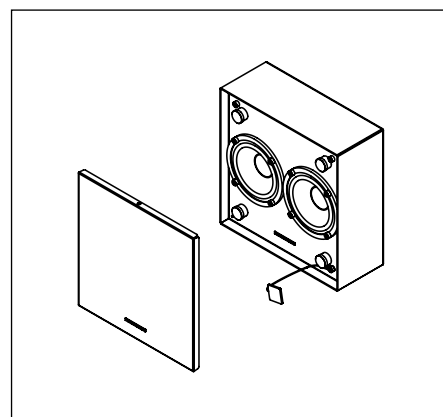

9

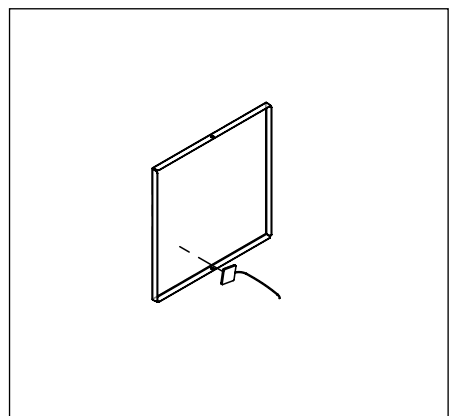

10

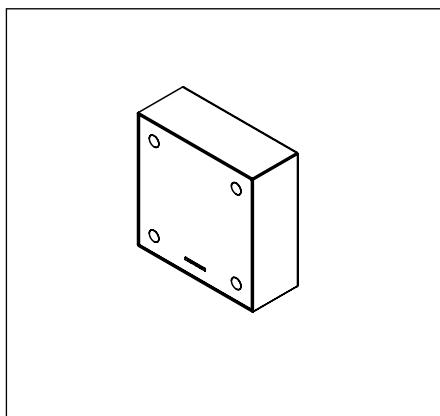

11

