

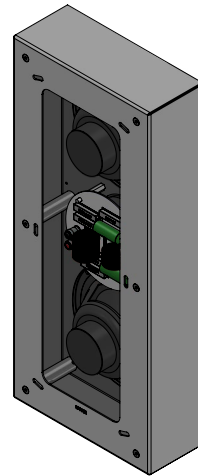


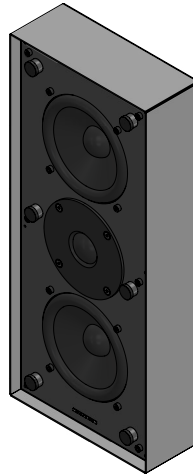

CORO™ COLLECTION

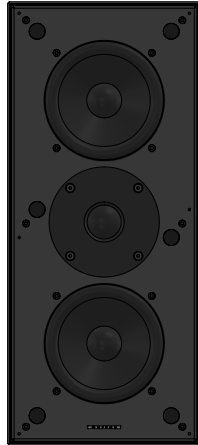

**SCAN OR CLICK TO EXTEND
YOUR GARVAN WARRANTY FOR FREE!**

3 years included, with the option to add
2 extra years at no additional cost.

OVERVIEW DESCRIPTION – UNIQUE DESCRIPTION PRODUCT

The Garvan KW313 is a high-performance 2-way loudspeaker from the Coro™ Collection, designed for on-wall and on-ceiling applications in premium indoor environments. Featuring dual 130 mm woofers and a 25 mm tweeter in a closed-box design, it delivers powerful, balanced sound with extended low-frequency response and detailed highs. Its slim profile and lacquered or satin-finish metal cabinet, available with grille options in fabric or stainless steel, ensure seamless architectural integration. Combining Made in Italy design with acoustic precision, the KW313 is ideal for residential, hospitality, and commercial projects where performance and aesthetics are equally important.

KEY FEATURES

2-way loudspeaker with 2 × 130 mm woofers + 25 mm tweeter

Power handling: 160 W AES / 320 W continuous

High sensitivity: 93 dB (2.83V/1m) / 90 dB (1W/1m)

Maximum SPL: 124 dB @ 1 m

Frequency response: 65 Hz – 20 kHz (–3 dB) with preset EQ

Extended range: 57 Hz – 20 kHz (–10 dB)

Wide coverage: >120° (1–4 kHz) / 120° (1–10 kHz)


Closed-box cabinet: lacquered or satin-finish metal with grille options in stainless steel or fabric

Installation compatibility: suitable for concrete, plasterboard, wooden, and modular panels

Indoor use with push connectors, supports 18 AWG to 15 AWG cables

Weight: 4.37 kg – slim yet robust construction

Extended warranty: 3+1+1 years with free registration



NAME INSTALLATION	On-wall
Type Installation	On-Wall / On-Ceiling Speaker, closed box
Surface Compatibility	Suitable for installation in, concrete wall, Plasterboard, wooden panels, modular panel, and similar.
Installation Requirements:	Support thickness suitable for product weight
SINGLE LOUDSPEAKER PERFORMANCE	
AES Power Handling	160 W
Continuous Power Handling ***	320 W
Sensitivity 2,83V / 1m ****	93 dB
Sensitivity 1W/1m ****	90 dB
Calculated Maximum SPL @ 1m*	124 dB
TRANSDUCER	
Type	2 Way
Nominal size	2x WF 130 mm + TW 25mm
Nominal Impedance	4Ω
Loudspeaker EQ	Not required, Garvan Preset EQ, Filter and protection available
Recommended High-Pass Filter Protection	55 Hz with 48 dB/Oct. High pass Filter
Frequency Response (-3 dB)	65 Hz – 20 kHz **
Frequency Range (-10 dB)	57 Hz - 20 kHz **
Nominal Coverage Angle (1 KHz - 4 kHz)	> 120°
Nominal Coverage (1 KHz – 10 kHz)	120
PHYSICAL	
Frame Material	lacquered metal cabinet, galvanic or satin-finish steel
Speaker support Material	Black laquered metal support
Cover	Laquered or galvanic metal Grille/ Brusced stainlenss steel Grille / Fabric covered frame.
ENVIRONMENTAL FEATURES	
Enviropment of Use	Indoor environments
Operating Temperature Range *****	
environmental protection.	
Connectors	Push connector, mounted on speaker. Accepts 18 AWG (0.8 mm2) to 15 AWG (2,08 mmq) size wire.
Maximum Ceiling Thickness	
Product Dimensions	
Ceiling Cutout	
Net Weight, Frame	
Net Weight, Loudspeaker	
Net Weight, Cover	

LOGISTICAL DATA			
Packaging dimensions			
Shipping Weight			
Quantity of products per package		1 to 2 based on logistics optimization per shipment	
MAINTENANCE			
Cleaning Method		microfiber cloth	
General precautions		do not use harsh cleaning products	
INCLUDED ACCESSORIES			
OPTIONAL ACCESSORIES			
Transformer for hight line voltage		TRT052 – 70/100V - 25/37/50W	
Transformer for hight line voltage		TRT054 – 70/100V - 10/15/20W	
Cover installation kit		GAR136	
Cable size/load	8 ohm	4 ohm	2 ohm
2 sq mm.	20m / 65ft.	10m / 32ft	5m / 16ft
2,5 sq mm.	30m / 100ft.	15m / 50ft	7,5m / 25ft
4 sq mm.	60m / 200ft.	30m / 100ft	15m / 50ft
NOTES:			

* Maximum SPL calculated from sensitivity and power handling specifications, using a signal with crest factor 4 (12dB), exclusive of power compression.

** With dedicated preset

*** Power on Continuous Program is defined as 3 dB greater than the Nominal rating.



**** average SPL measured from 200 Hz to 1,5 kHz


***** With dedicated ignition and maintenance process

ON-WALL CODES


1 Loudspeaker **KW313**
2 Frame **CW1944**
3 Front cover **41BXX**

AES POWER **160 W**
TYPE **2 WAY**
NOM. SIZE **2X WF 130 mm + TW 25 mm**
NOM. IMP. **4Ω**

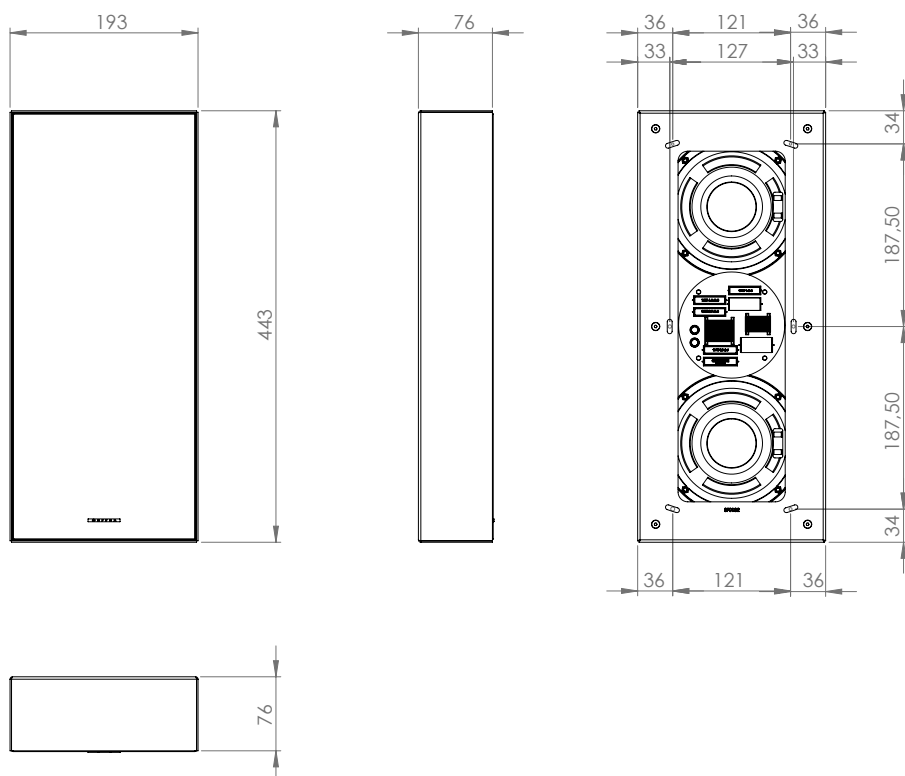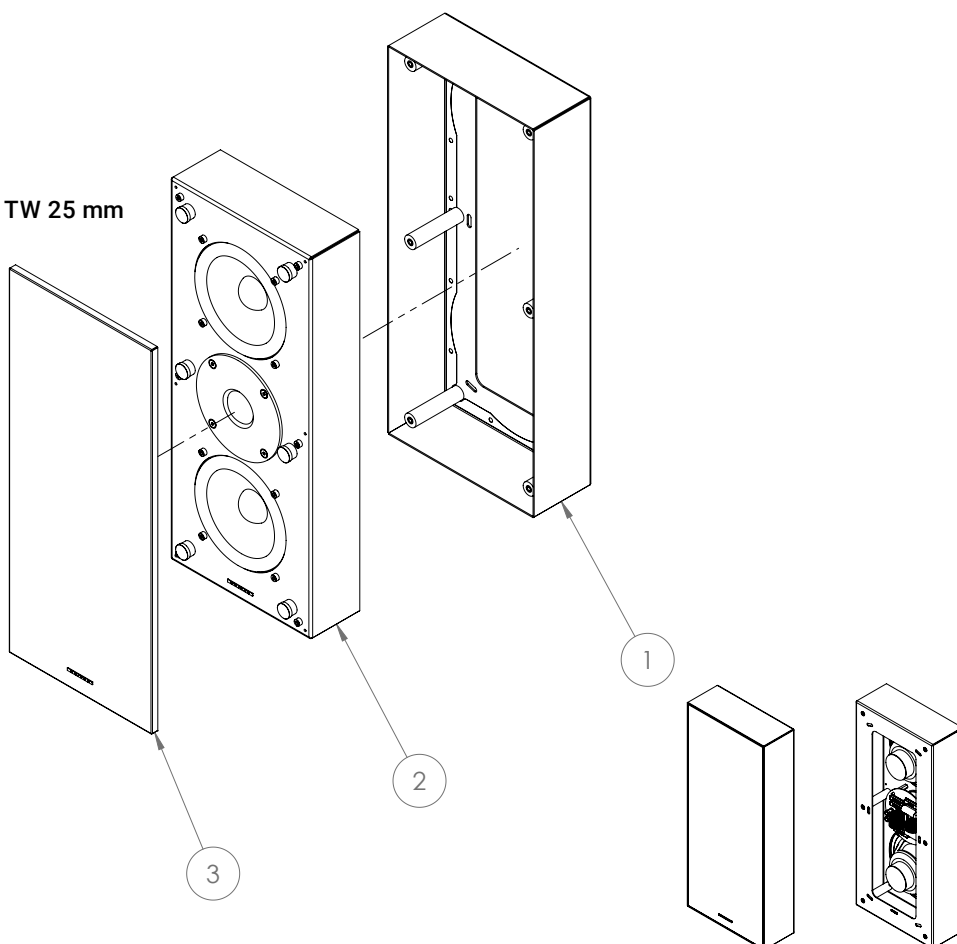





1 Jig set

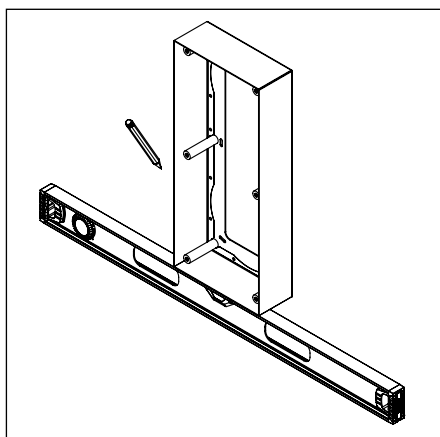


2

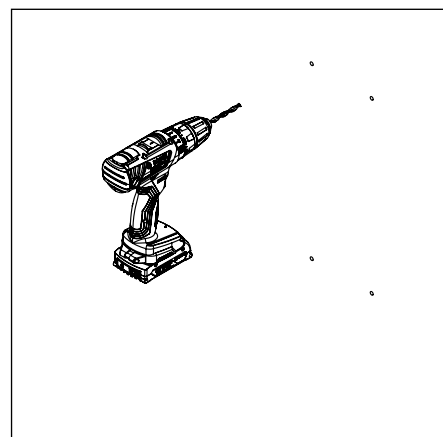


3

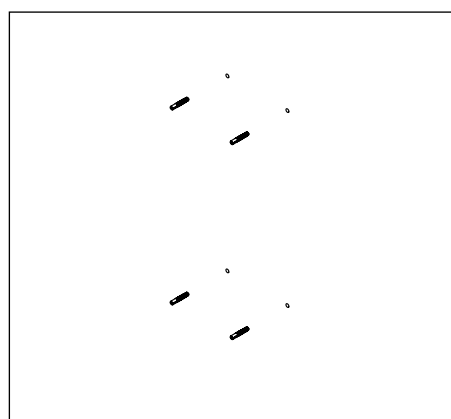


4

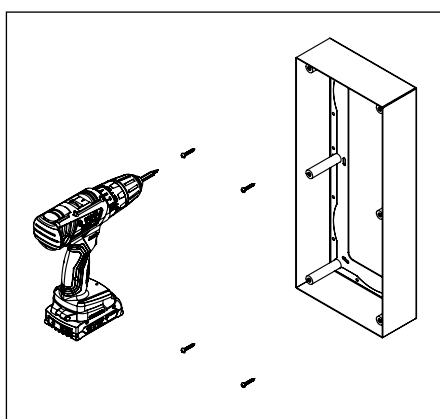


5

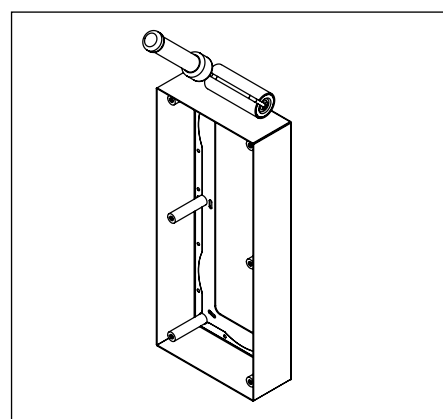


6

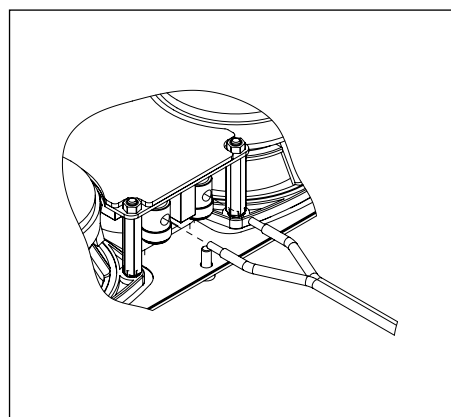


7

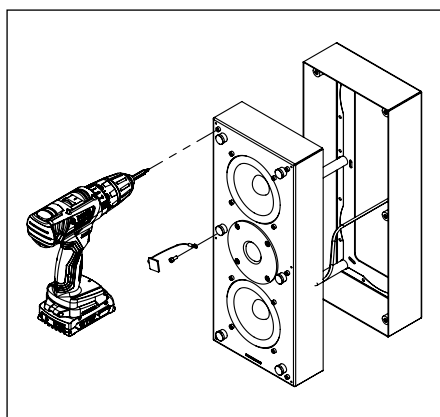


8

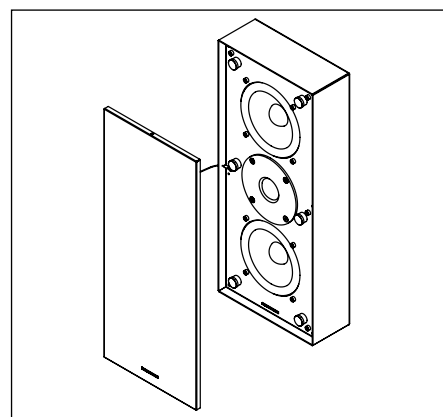

9

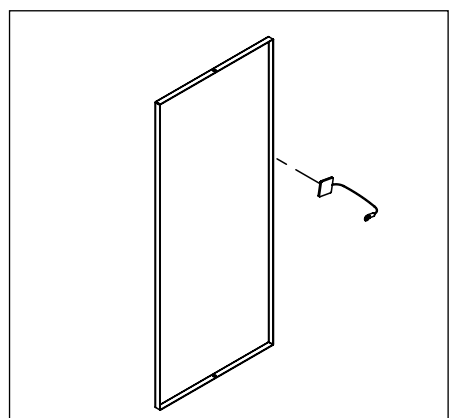

10

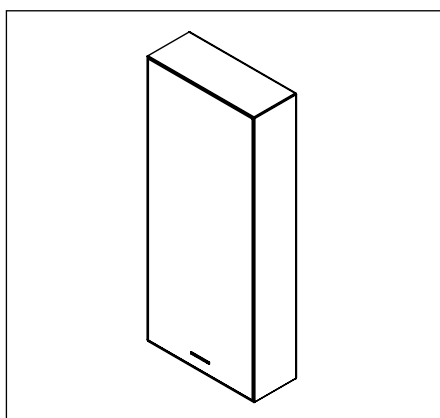

11

