



LOTO™ COLLECTION

Polyethylene



Concrete



**SCAN OR CLICK TO EXTEND
YOUR GARVAN WARRANTY FOR FREE!**

3 years included, with the option to add
2 extra years at no additional cost.

OVERVIEW DESCRIPTION – UNIQUE DESCRIPTION PRODUCT

The Garvan SN120 is a high-performance 360° outdoor loudspeaker from the Loto™ Collection, designed to provide powerful, immersive sound in gardens, terraces, pool areas, and open-air venues. Equipped with a 200 mm full-range driver in a polyethylene or concrete enclosure with stainless steel support and grille, it combines acoustic precision with durability. With its high sensitivity, wide frequency response, and IP-rated weather resistance, the SN120 offers reliable performance and seamless integration for residential, hospitality, and professional outdoor applications.

KEY FEATURES

Full-range outdoor loudspeaker with 1 × 200 mm driver

Power handling: 120 W AES / 240 W continuous

High sensitivity: 93 dB (2.83V/1m and 1W/1m)

Maximum SPL: 126 dB @ 1 m

Frequency response: 61 Hz – 12 kHz (–3 dB)

Extended range: 56 Hz – 15 kHz (–10 dB)

Coverage: true 360° omnidirectional sound dispersion

Cabinet options: polyethylene or concrete body with AISI 316L stainless steel support and grille

Weather resistant: built for long-term outdoor performance

Operating temperature: suitable for all climates

Installation accessories: available bases and brackets for flexible mounting

Weight: 5.82 kg – robust yet elegant design

Extended warranty: 3+1+1 years with free registration



NAME INSTALLATION		Outdoor 360°
Type Installation		Outdoor 360° speaker
Surface Compatibility		
Installation Requirements:		
SINGLE LOUDSPEAKER PERFORMANCE		
AES Power Handling		120 W
Continuous Power Handling ***		240 W
Sensitivity 2,83V / 1m ****		93 dB
Sensitivity 1W/1m ****		93 dB
Calculated Maximum SPL @ 1m*		126 dB
TRANSDUCER		
Type		Full Range
Nominal size		1x 200mm
Nominal Impedance		8Ω
Loudspeaker EQ		Not required, Garvan Preset EQ, Filter and protection available
Recommended High-Pass Filter Protection		60Hz with 48 dB/Oct. High pass Filter
Frequency Response (-3 dB)		61 Hz – 12 kHz **
Frequency Range (-10 dB)		56 Hz – 15 kHz **
Nominal Coverage Angle (1 KHz - 4 kHz)		360°
Side Coverage (1500Hz - 10kHz)		-0 dB
Rear Coverage (1500Hz - 10kHz)		-0 dB
PHYSICAL		
Frame Material		Polyethylene or Concrete
Speaker support Material		AISI 316L stainless steel
Cover		AISI 316 stainless steel painted black
ENVIRONMENTAL FEATURES		
Enviropment of Use		Outdoor environments
Operating Temperature Range *****		
environmental protection.		
Connectors		
Maximum Ceiling Thickness		
Product Dimensions		
Ceiling Cutout		
Net Weight, Frame		
Net Weight, Loudspeaker		
Net Weight, Cover		

LOGISTICAL DATA	
Packaging dimensions	
Shipping Weight	
Quantity of products per package	1 to 2 based on logistics optimization per shipment
MAINTENANCE	
Cleaning Method	microfiber cloth
General precautions	do not use harsh cleaning products
INCLUDED ACCESSORIES	
Floor mounting base	yes
OPTIONAL ACCESSORIES	
Transformer for high line voltage	TRT055 - 70/100V - 25/37/50W
Transformer for high line voltage	
Waterproof 2-pin connector	RP0001
Turf protection plate (Ø 460 mm)	HA046H (matte black) - HA046X (brushed stainless steel)
Ground anti-theft kit	HRX031
Protective Cover	RT001A

CABLE SIZE/LOAD SUGGESTIONS				
Cable size/load	8 ohm	4 ohm	2 ohm	
2 sq mm.	20m / 65ft.	10m / 32ft	5m / 16ft	
2,5 sq mm.	30m / 100ft.	15m / 50ft	7,5m / 25ft	
4 sq mm.	60m / 200ft.	30m / 100ft	15m / 50ft	

NOTES:

* Maximum SPL calculated from sensitivity and power handling specifications, using a signal with crest factor 4 (12dB), exclusive of power compression.

** With dedicated preset







*** Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

**** average SPL measured from 200 Hz to 1,5 kHz

***** With dedicated ignition and maintenance process


OUTDOOR 360° CODES

- ① 1 Loudspeaker **SN120**
AES POWER **120 W**
TYPE **FULL RANGE**
NOM. SIZE **1X 200 mm**
NOM. IMP. **8Ω**
- ② Turf protection plate **HA046H - HA046X**
- ③ Protective Cover **RT001A**
- ④ Transformer for high line voltage **TRT055 - 70/100V - 25/37/50W**
- ⑤ Ground anti-theft kit **HRX031**
- ⑥ Waterproof 2-pin connector **RP0001**
- ⑦ spacers for freestanding use

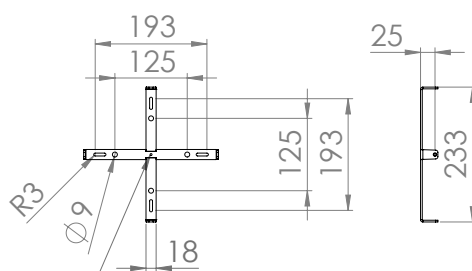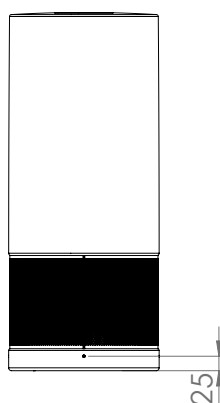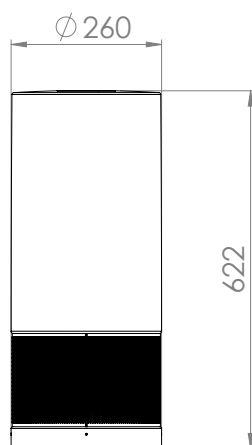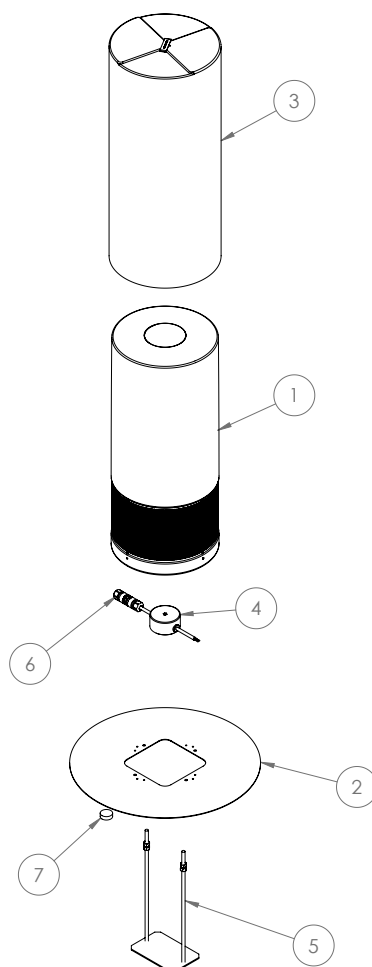


M4 - for fixing 100v line transformer


INSTALLATION INSTRUCTIONS **SN120 Outdoor 360°** **Waterproof 2-pin connector RP0001**

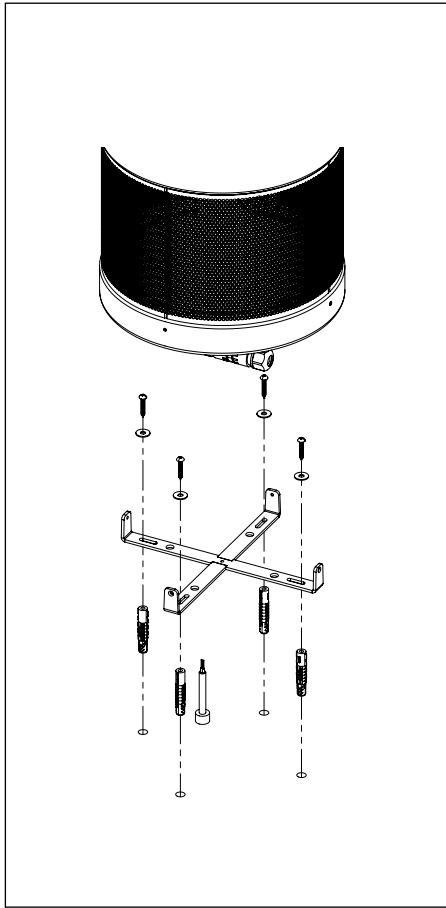


1

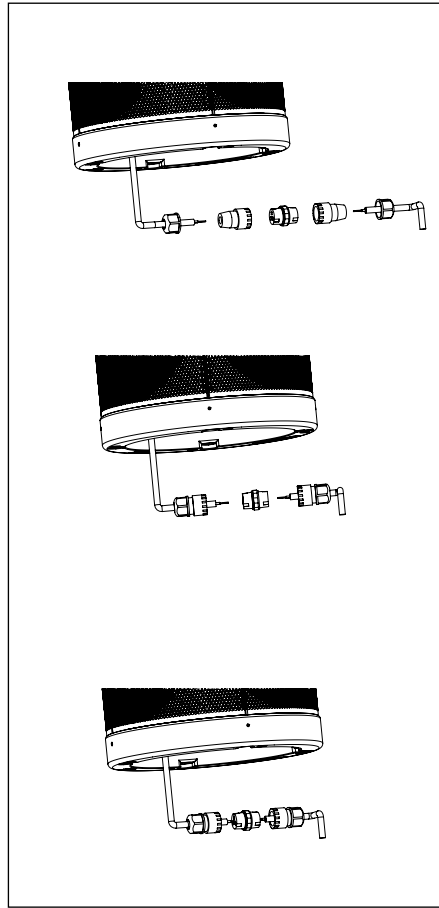


2

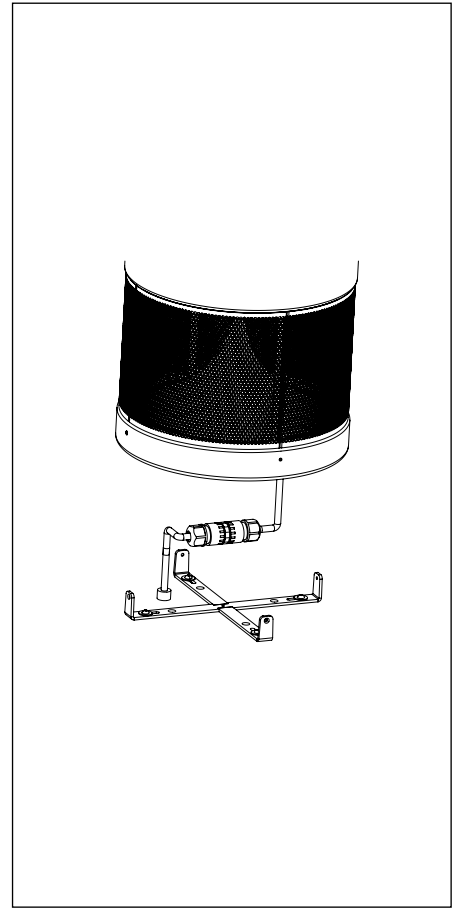

3

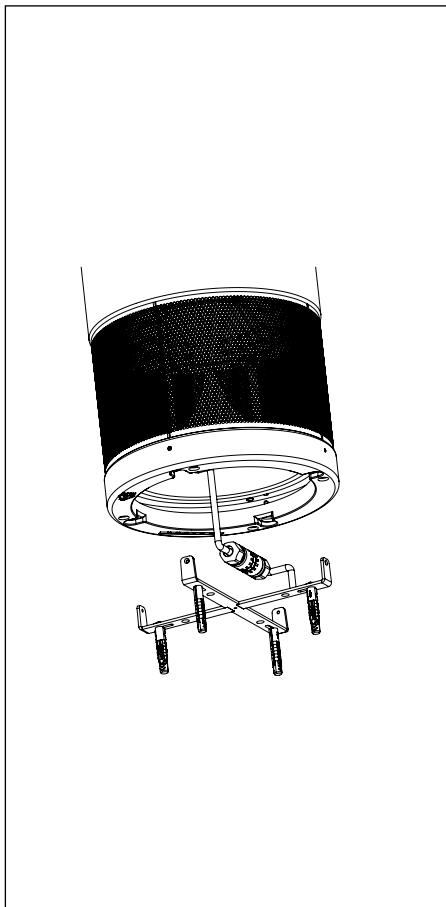


4

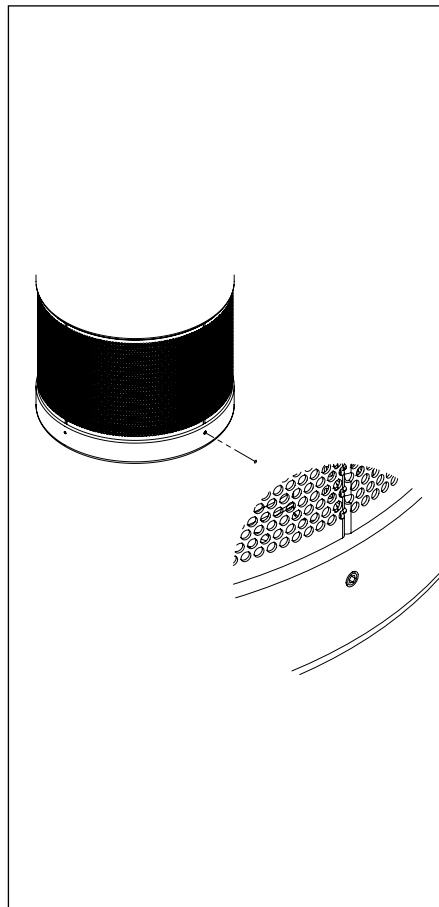


5

INSTALLATION INSTRUCTIONS **SN120 Outdoor 360°** Transformer for high line voltage **TRT055 - 70/100V - 25/37/50W**

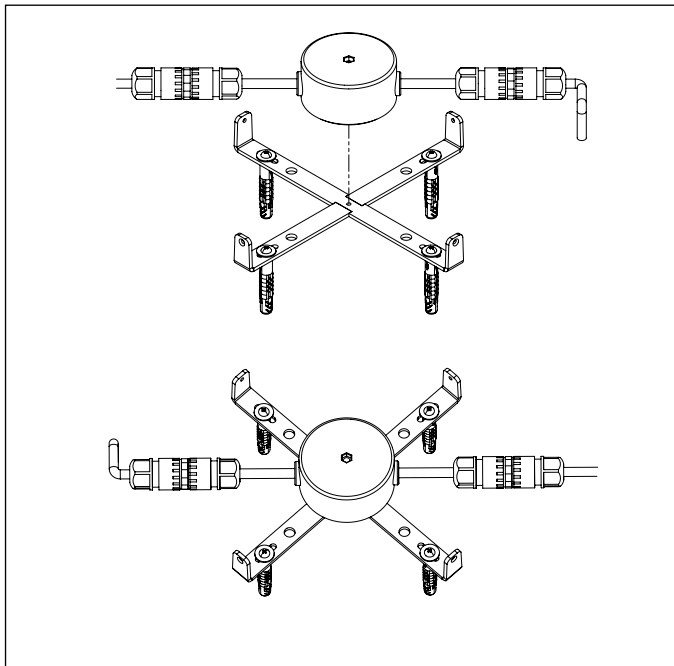


1

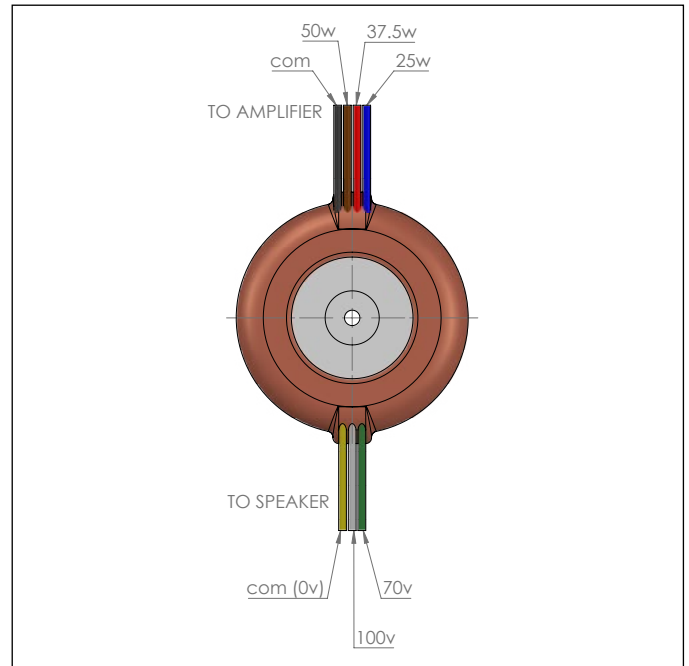


2


INSTALLATION INSTRUCTIONS **SN120 Outdoor 360°** Turf protection plate **HA046H - HA046X**

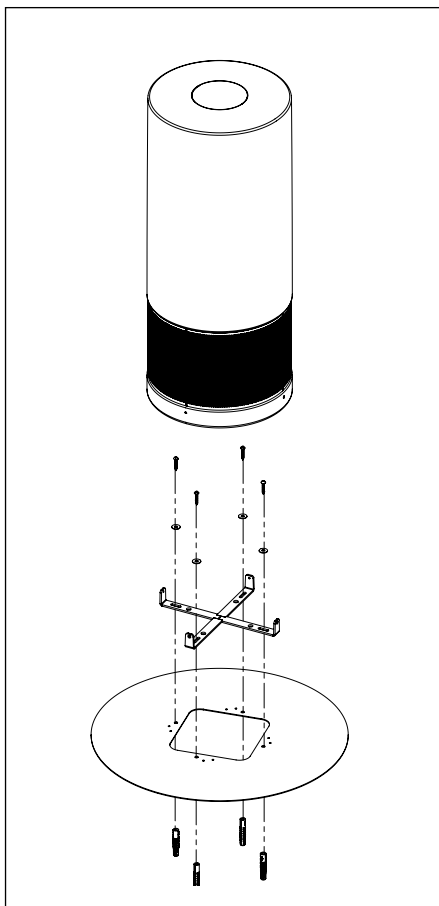

1

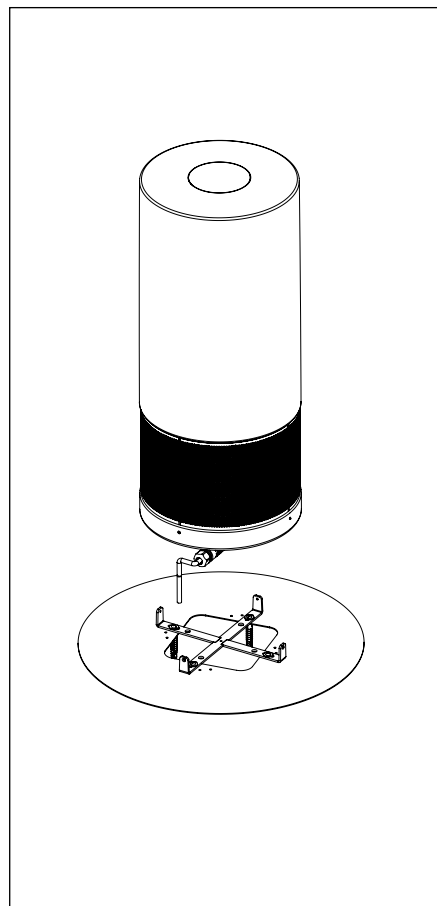


2

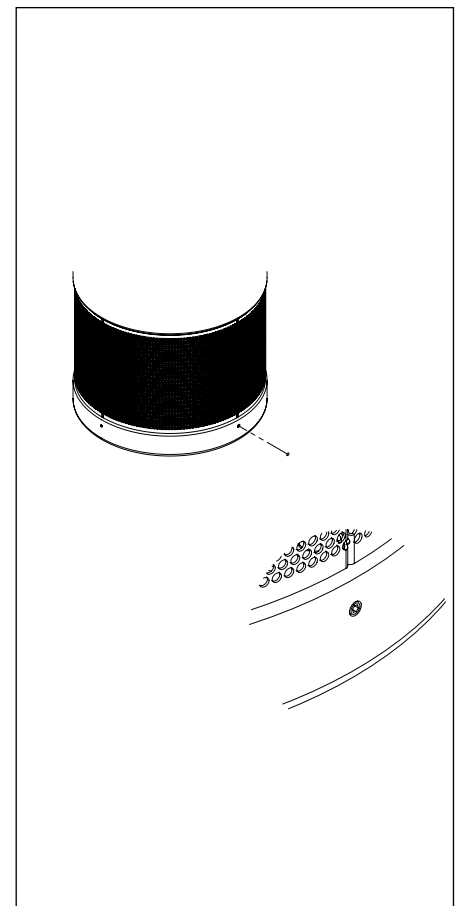


3


INSTALLATION INSTRUCTIONS **SN120 Outdoor 360°** **Ground anti-theft kit HRX031**

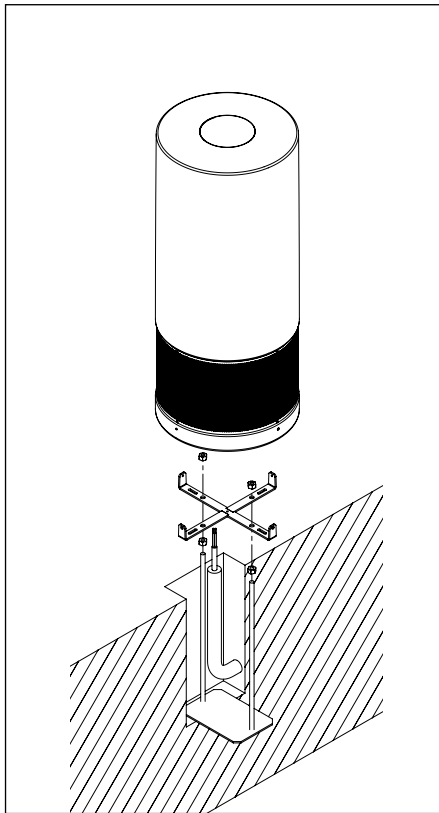

1

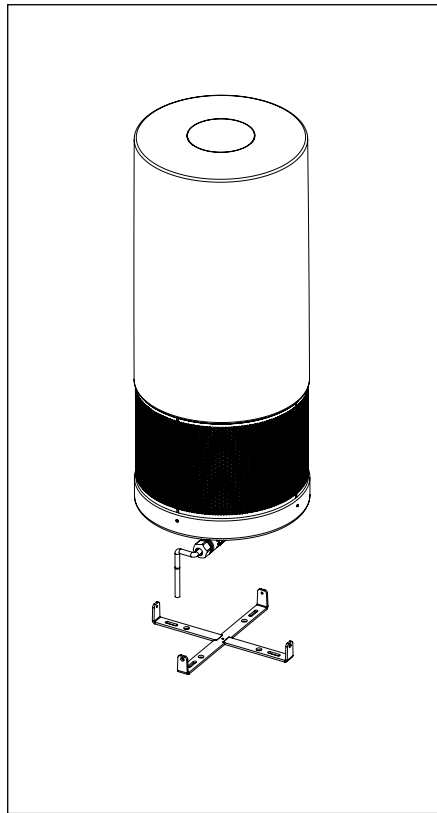


2

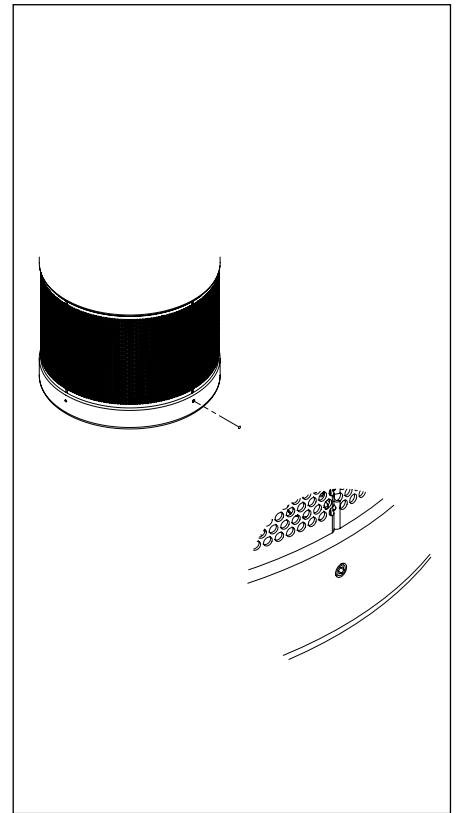


3


INSTALLATION INSTRUCTIONS **SN120 Outdoor 360°** **Ground anti-theft kit HRX031 + Turf protection plate HA046H - HA046X**

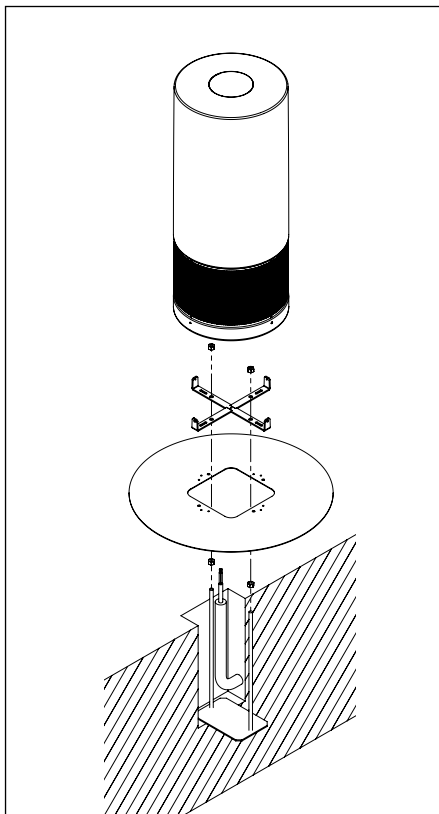

1

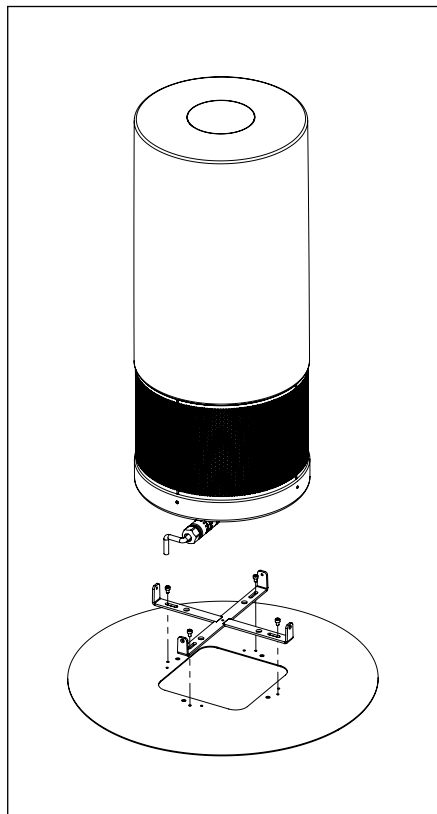


2

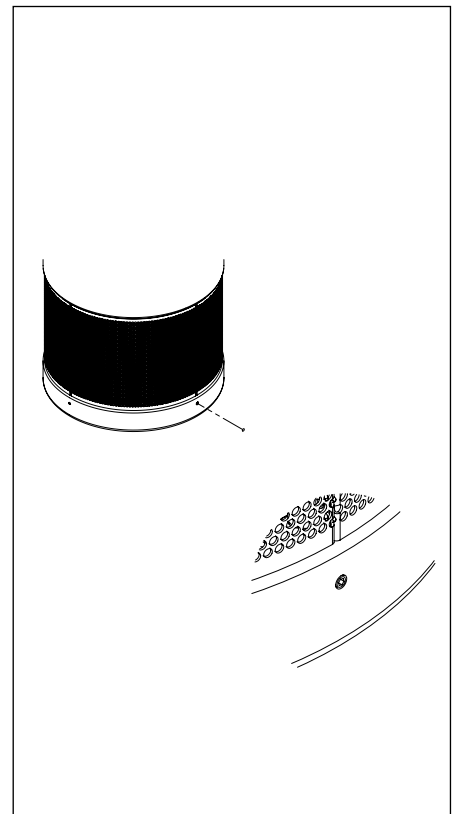


3


INSTALLATION INSTRUCTIONS **SN120 Outdoor 360°** **Turf protection plate with spacers for freestanding use HA046H - HA046X**

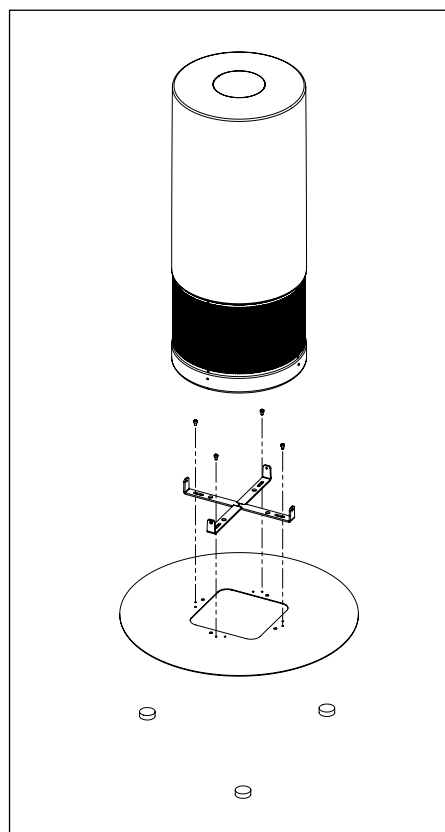


1

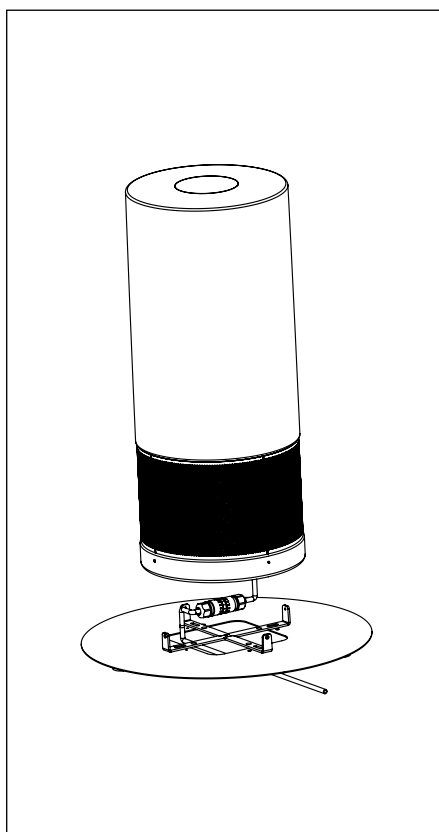


2

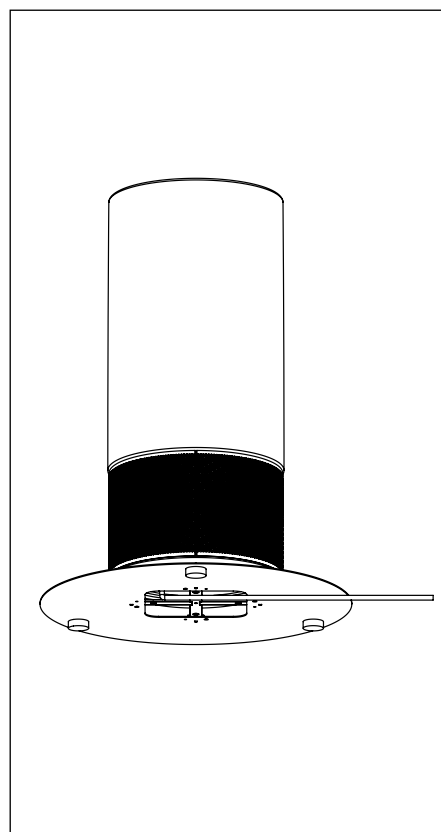


3

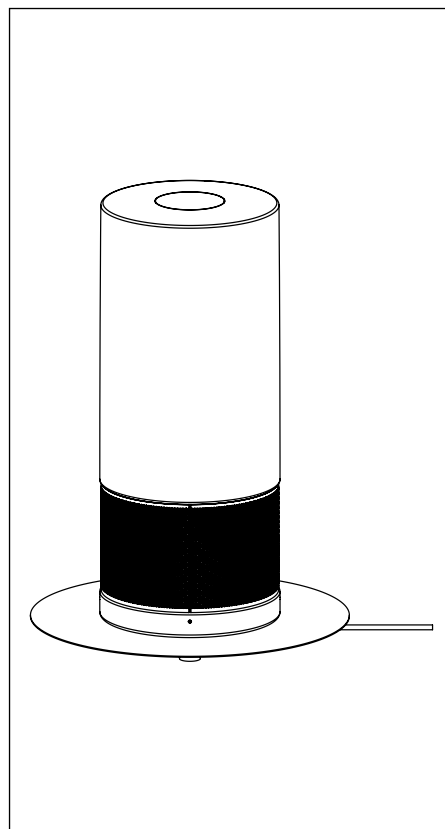

4

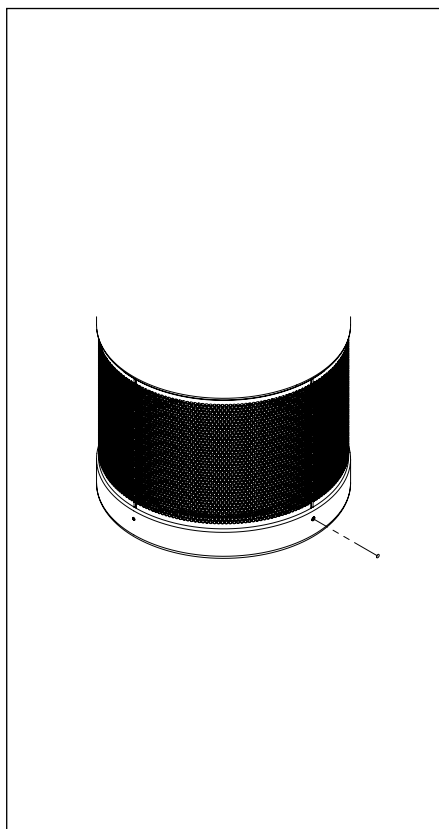


5

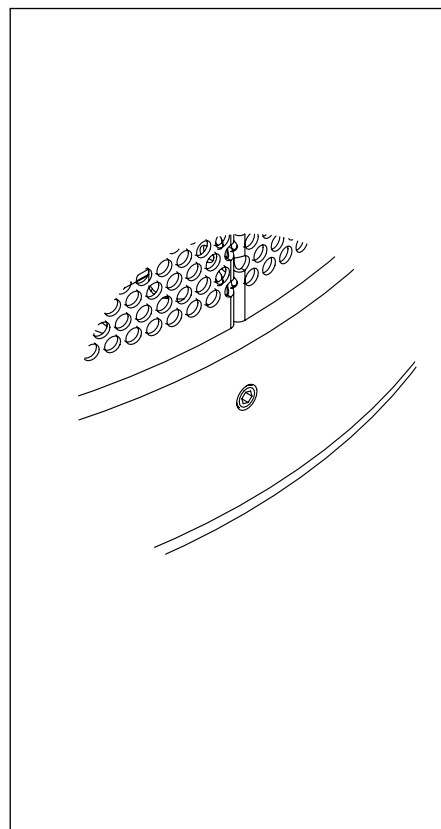

6

	White LED	RGB LED
Power supply	24 V	24 V
Power	8,5 W	12 W
Dimmable	√	√
Led colour temperature	3000 K	Red - Green - Blue
Emission angle	120°	120°
Operating temperature	-20 °C (min) +45 °C (max)	-20 °C (min) +45 °C (max)

WHITE LED wiring diagram

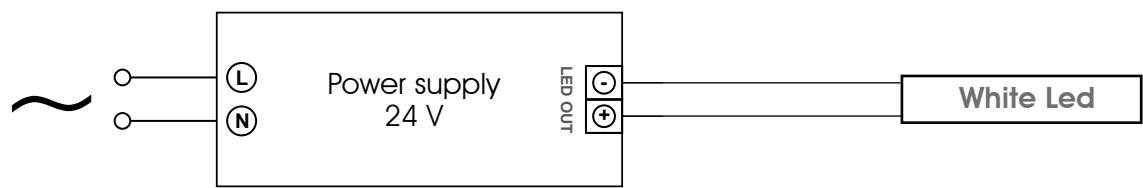

RGB LED wiring diagram

