



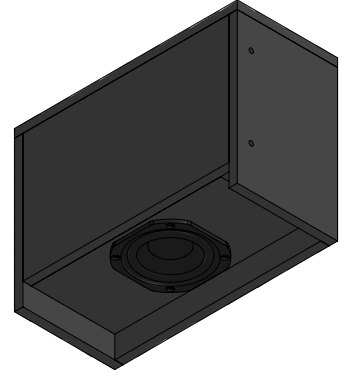

CORO™ COLLECTION

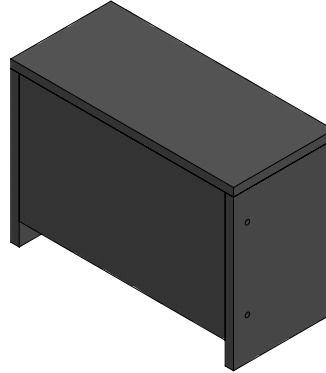

**SCAN OR CLICK TO EXTEND
YOUR GARVAN WARRANTY FOR FREE!**

3 years included, with the option to add
2 extra years at no additional cost.

OVERVIEW DESCRIPTION – UNIQUE DESCRIPTION PRODUCT

The Garvan WA113 is a compact indoor subwoofer from the Coro™ Collection, designed for free-standing use or discreet integration inside furniture. Featuring a 130 mm woofer in a dual voice-coil (4+4 Ω) configuration, it delivers deep and controlled bass to complement full-range loudspeakers in residential or commercial audio systems. Built with a painted wooden cabinet, customizable in any RAL or NCS color, the WA113 combines acoustic precision, flexibility, and elegant design. With its compact form factor and solid performance, it is ideal for enhancing home audio, hospitality, and wellness environments.

KEY FEATURES

Indoor subwoofer with 1 × 130 mm woofer (dual voice coil, 4+4 Ω)

Connectivity: Phoenix connectors, accepts 18 AWG to 11 AWG cables

Power handling: 60 + 60 W AES / 120 + 120 W continuous

Weight: 3.91 kg – lightweight and discreet

Sensitivity: 84 dB (2.83V/1m and 1W/1m)

Extended warranty: 3+1+1 years with free registration


Maximum SPL: 117 dB @ 1 m

Frequency response: 41 Hz – 1 kHz (–3 dB)

Extended range: 35 Hz – 1 kHz (–10 dB)

Cabinet construction: black painted wood (custom RAL/NCS finishes available)

Installation options: free-standing or integrated into furniture



NAME INSTALLATION	Subwoofer
Type Installation	Free Standing / inside the furniture
Surface Compatibility	
Installation Requirements:	
SINGLE LOUDSPEAKER PERFORMANCE	
AES Power Handling	60 + 60 W
Continuous Power Handling ***	120 + 120 W
Sensitivity 2,83V / 1m ****	84 dB
Sensitivity 1W/1m ****	84 dB
Calculated Maximum SPL @ 1m*	117 dB
TRANSDUCER	
Type	Subwoofer
Nominal size	1x WF 130mm
Nominal Impedance	4+4 Ω
Loudspeaker EQ	Not required, Garvan Preset EQ, Filter and protection available
Recommended High-Pass Filter Protection	40Hz with 48 dB/Oct. Hight pass Filter
Frequency Response (-3 dB)	41 Hz – 1KHz
Frequency Range (-10 dB)	35 Hz – 1KHz
PHYSICAL	
Cabinet / support Material	Cabinet in standard black painted wood or custom painted on the RAL or NCS scale
Cover	
ENVIRONMENTAL FEATURES	
Environment of Use	Indoor environments
Operating Temperature Range *****	
Connectors	Phoenix connector. Accepts 18 AWG (0.8 mm ²) to 11 AWG (4,17 mm ²) size wire.
Product Dimensions	
Ceiling Cutout	
Net Weight	
LOGISTICAL DATA	
Packaging dimensions	
Shipping Weight	
Quantity of products per package	1
MAINTENANCE	
Cleaning Method	microfiber cloth
General precautions	do not use harsh cleaning products

INCLUDED ACCESSORIES			
OPTIONAL ACCESSORIES			
Transformer for hight line voltage		TRT052 – 70/100V - 25/37/50W	
Transformer for hight line voltage		TRT054 – 70/100V - 10/15/20W	
Cover installation kit		GAR136	
Cable size/load	8 ohm	4 ohm	2 ohm
2 sq mm.	20m / 65ft.	10m / 32ft	5m / 16ft
2,5 sq mm.	30m / 100ft.	15m / 50ft	7,5m / 25ft
4 sq mm.	60m / 200ft.	30m / 100ft	15m / 50ft
NOTES:			

* Maximum SPL calculated from sensitivity and power handling specifications, using a signal with crest factor 4 (12dB), exclusive of power compression.

** With dedicated preset



*** Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

**** average SPL measured from 200 Hz to 1,5 kHz

***** With dedicated ignition and maintenance process

SUBWOOFER CODES

1 Loudspeaker	WA113
AES POWER	60 + 60 W
TYPE	SUBWOOFER
NOM. SIZE	1X WF 130mm
NOM. IMP.	4+4 Ω

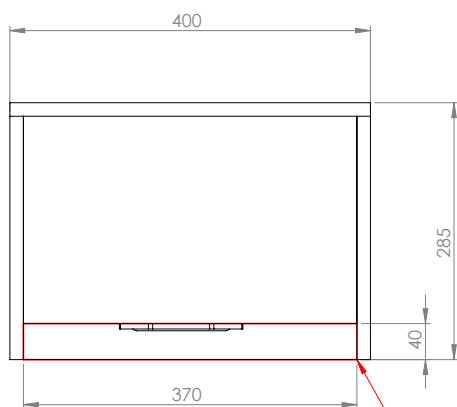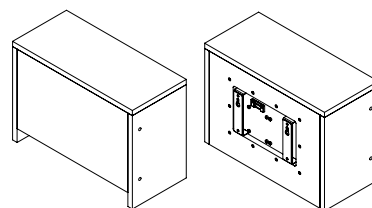

sound passage area,
do not obstruct the passage

