

The KX-1152 cinema surround loudspeaker offers very high power handling and sensitivity for the most demanding applications in the largest cinema auditoriums. Featuring a true horn loaded high frequency section this unique surround loudspeaker has been specifically developed to meet the high output level requirement of the Dolby® Atmos™ surround sound format.

To produce high output and low distortion a patented constant directivity high frequency horn is employed coupled with an extended response 1 ¾ inch diameter voice coil compression driver. This is supplemented by dual high power 15 inch bass drivers with 3 inch voice coils, features dual aluminium shorting rings for low harmonic distortion to deliver superior surround sound resolution. The curvilinear paper cone and surround of the bass drivers have also been developed to provide the smoothest possible response.

Building on a long and successful history within the cinema industry, our in-house research, development and manufacturing team deliver a strong focus on quality and rigorous production standards. Every speaker that leaves Krix has been fully tested in an advanced acoustic measurement chamber. Tight production tolerances are upheld to ensure best-in-class product quality and reliability.

FEATURES

- Patented constant directivity horn technology provides precise coverage, uniform frequency response. The result is that every seat in the cinema experiences improvements in clarity and definition.
- Mounting bracket available that allows both horizontal pan and vertical tilt adjustment necessary for Dolby® Atmos™.
- Krix proprietary 'X' Bracing system within the enclosure reduces panel resonances and cabinet standing waves.
- Krix engineered bass driver featuring a large vented ferrite magnet, dual aluminium shorting rings and symmetrical gap geometry for minimum distortion at all levels.
- Safety chain bracket.



Product code	KX-1155	
Frequency range	48 - 19,000 Hz	
Sensitivity (2.83V / 1m Half Space ³)	103 dB	
Input power rating ²	1000 W	
Impedance	4 Ω	
Crossover frequency	1600 Hz	
Nominal dispersion	100° Horizontal, 40° Vertical, averaged 400 Hz to 12kHz (-6dB)	
Dimensions	1186 (H) x 520 (W) x 520 (D) mm	46 ¾ (H) x 20 ½ (W) x 20 ½ (D) inches
Net weight	55 kg	121 lbs
Baffle angle	15 °	

DETAILED SPECIFICATIONS

Product code	KX-1155
Sensitivity	
1 W/m, Free space ¹	99 dB
1 W/m, Half space ^{1,3}	101 dB
2.83 V/m, Free space	101 dB
2.83 V/m, Half space ³	103 dB
Impedance	
Nominal	4 Ω
Minimum	4.0 Ω
Maximum Input Voltage ⁴	63 V
Maximum Input Power	
Continuous ³	1000 W
Peak	4000 W
Recommended Processing	Subsonic 50 Hz, >12 dB/oct
Low frequency transducers	2 x 380 mm (15 inch) paper cone driver, ferrite magnet, vented pole piece, 75 mm edge wound copper voice coils, aluminium shorting ring.
High frequency transducer	1 x 35mm (1.4 inch) compression driver, ferrite magnet, coated titanium diaphragm, polyimide surround.
Enclosure	Vented B4 alignment tuned to 40 Hz, Krix proprietary 'X bracing', optimally damped with polyester fibre, MDF black vinyl finish.
Horn	90° x 40° constant directivity, thermoset resin reinforced with glass fibre.
Bracket	Included: Rear safety chain hook - Available: KX-91155.S Tilt $\pm 30^\circ$, Swivel $\pm 55^\circ$, 330 mm offset from wall
Terminals	High current spring terminals featuring a 5mm hole to accept up to 10AWG cable.


NOTES

- All measurements and specifications are made in accordance with AES2-2012 and in a form compatible with Dolby® Atmos™ calculator.
 - Due to continued development, specifications may change without notice.
- Sensitivity measurements adjusted to the nominal 1W input power, calculated from the real part of the electrical input impedance over the operating frequency range.
 - Maximum AES continuous power capacity (AES2-2012) band limited test signal duration of two hours.
 - Half space sensitivity based on partial increase due to rear wall loading at low frequencies estimated from the directivity index over operating frequency range.
 - RMS voltage required to deliver the maximum continuous power to the loudspeaker, IEC shaped pink noise with duration of two hours.


KX-1155

COMMERCIAL CINEMA SURROUND



DETAILED DIMENSIONS

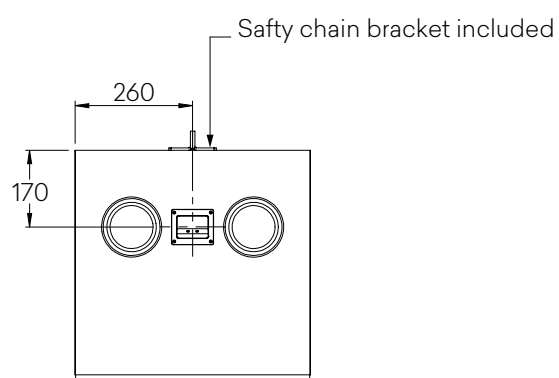

Top View

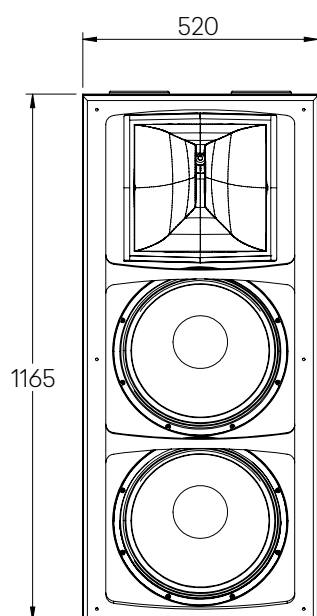

Front View

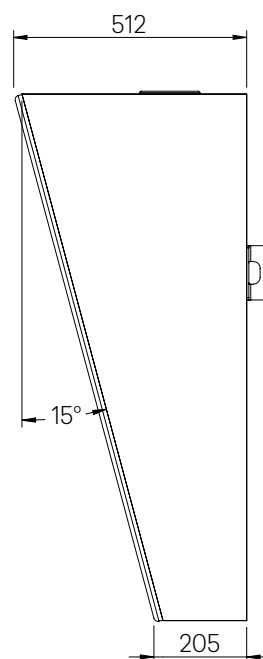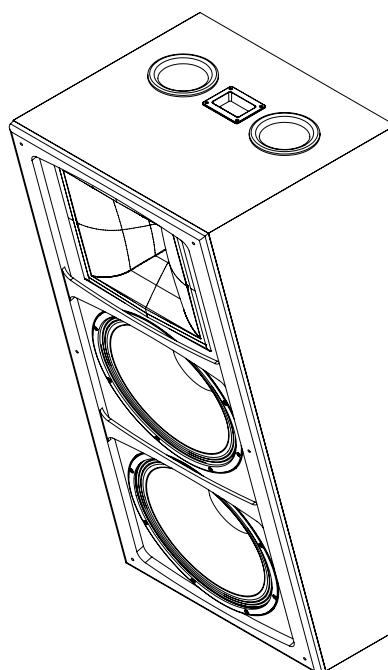

Side View

