

The KX-1470 cinema surround loudspeaker offers high power handling, in a compact package. The cabinet is braced and critically damped featuring a 15 degree angled front baffle to ensure optimum coverage within the auditorium while reducing reflections off the ceiling.

The single 8 inch bass driver has a 1½ inch vented magnet voice coil wound on an aluminium former, featuring a copper shorting ring for low harmonic distortion delivering superior surround sound resolution. The paper cone and surround edge termination of the bass driver has been developed to provide the smoothest possible response. The combined high frequency response is exceptionally well controlled setting a new bench mark for surround loudspeaker reproduction.

Building on a long and successful history within the cinema industry, our in-house research, development and manufacturing team deliver a strong focus on quality and rigorous production standards. Every speaker that leaves Krix has been fully tested in an advanced acoustic measurement chamber. Tight production tolerances are upheld to ensure best-in-class product quality and reliability.

FEATURES

- High sensitivity and power handling in a compact package
- Krix engineered bass driver featuring, large vented magnet ferrite magnet structure, copper shorting ring and symmetrical gap geometry for minimum distortion at all levels.
- High frequency drive unit with ferro fluid cooling, large roll surround, and doped fabric dome.



Product code	KX-1470
Frequency range	50 - 20,000 Hz
Sensitivity (2.83V / 1m Half Space ²)	92 dB
Input power rating ¹	200 W
Impedance	8 Ω
Crossover frequency	1800 Hz
Dimensions (mm)	460 (H) x 338 (W) x 265 (D) mm
Dimensions (inches)	18 (H) x 13 ¼ (W) x 10 ½ (D) inches
Net weight (kg)	13 kg
Net weight (lbs)	29 lbs
Baffle angle	15°

DETAILED SPECIFICATIONS

Product code	KX-1470
Sensitivity	
1 W/m, Free space	90 dB
1 W/m, Half space ²	92 dB
2.83 V/m, Free space	90 dB
2.83 V/m, Half space ²	92 dB
Impedance	
Nominal	8 Ω
Minimum	6.2 Ω
Maximum Input Voltage ³	40 V
Maximum Input Power	
Continuous ³	200 W
Peak	800 W
Recommended Processing	Subsonic 50 Hz, >12 dB/oct
Low frequency transducers	1 x 205mm (8 inch) paper cone driver with a 38 mm (1.5 inch) vented magnet voice coil wound on an aluminium former. Shorting ring for low harmonic distortion.
High frequency transducer	1 x 28mm (1 inch) doped fabric dome tweeter. Ferro fluid cooled.
Enclosure	Vented, optimally damped with polyester fibre, MDF black vinyl finish.
Bracket	KX-9020 (adjustable tilt and depth), KX-91470 (shallow profile U-bracket)
Terminals	High current spring terminals featuring a 5mm hole to accept up to 10AWG cable.


NOTES

- All measurements and specifications are made in accordance with AES2-2012 and in a form compatible with Dolby® Atmos™ calculator.
 - Due to continued development, specifications may change without notice.
1. Maximum AES continuous power capacity (AES2-2012) band limited test signal duration of two hours.
 2. Half space sensitivity based on partial increase due to rear wall loading at low frequencies estimated from the directivity index over operating frequency range.
 3. RMS voltage required to deliver the maximum continuous power to the loudspeaker, IEC shaped pink noise with duration of two hours.


KX-1470

COMMERCIAL CINEMA SURROUND


DETAILED DIMENSIONS

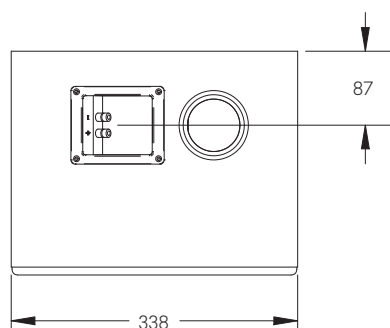

Top view

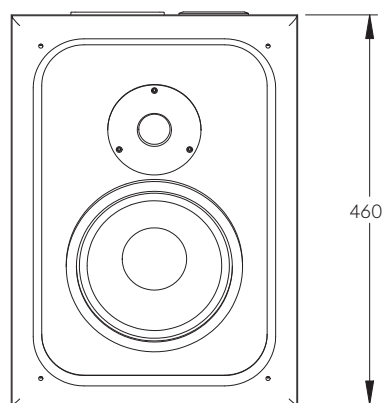

Front view

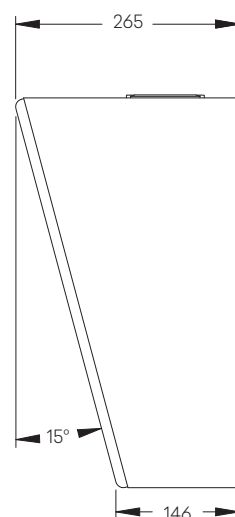

Side view

