

The KX-1570 cinema surround loudspeaker has been designed for use in Dolby® Atmos™ cinemas or larger auditoriums and offers high power handling and efficiency. The cabinet is braced and critically damped featuring a 15 degree angled front baffle to ensure optimum coverage within the auditorium while eliminating reflections off the ceiling. It possesses a dual concentric driver configuration to eliminate phasing problems in the crossover region associated with conventional driver layouts.

The high frequency driver utilises a titanium dome with 1¾ inch voice coil and has a 90 degree symmetrical dispersion pattern. The bass driver is a 12 inch paper cone with smooth response and extended bass output, it features a 2½ inch voice coil power for high power handling capabilities.

Building on a long and successful history within the cinema industry, our in-house research, development and manufacturing team deliver a strong focus on quality and rigorous production standards. Every speaker that leaves Krix has been fully tested in an advanced acoustic measurement chamber. Tight production tolerances are upheld to ensure best-in-class product quality and reliability.

Also available is a low profile flat version, the KX-1570.F, specifically designed for flush mounting on ceilings to meet Dolby® Atmos™ surround sound requirements.

FEATURES

- Dual concentric design for symmetrical vertical and horizontal dispersion pattern, delivering even coverage across the auditorium.
- Neodymium high frequency compression driver for high power handling, low distortion and high maximum sound pressure levels.
- Provision for standard 'U' bracket for fixed wall mounting in addition to pan and tilt swivel bracket for wall and ceiling applications.
- Safety chain bracket



Product type	Commercial cinema surround	
Frequency range	50 - 18,000 Hz	
Sensitivity (2.83V / 1m Half Space ²)	99 dB	
Input power rating ¹	400 W	
Impedance	8 Ω	
Crossover frequency	1800 Hz	
Nominal Dispersion	115° Horizontal, 115° Vertical, averaged 400 Hz to 12 kHz (-6dB)	
Product code	KX-1570	KX-1570.F
Dimensions (mm)	560 (H) x 430 (W) x 335 (D) mm	780 (H) x 415 (W) x 192(D) mm
Dimensions (inches)	22 (H) x 17 (W) x 13 ¼ (D) inches	30 ¾ (H) x 16 ½ (W) x 7 ½ (D) inches
Net weight (kg)	18 kg	18 kg
Net weight (lbs)	40 lbs	40 lbs
Baffle angle	15°	0°

DETAILED SPECIFICATIONS

Product code	KX-1570 & KX-1570.F
Sensitivity	
1 W/m, Free space	96 dB
1 W/m, Half space ²	98 dB
2.83 V/m, Free space	96 dB
2.83 V/m, Half space ²	98 dB
Impedance	
Nominal	8 Ω
Minimum	7.5 Ω
Maximum Input Voltage ³	57 V
Maximum Input Power	
Continuous ³	400 W
Peak	1600 W
Recommended Processing	Subsonic 50 Hz, >12 dB/oct
Low frequency transducers	1 x 300mm (12 inch) paper cone with a nominal 63.5mm (2.5 inch) voice coil
High frequency transducer	1 x 45mm (1.75 inch) co-axially mounted neodymium compression driver.
Enclosure	Vented QB3 alignment tuned to 45 Hz, internal bracing, optimally damped with polyester fibre, MDF black vinyl finish.
Bracket	KX-9020 (adjustable tilt and depth), KX-91570.S (adjustable tilt and swivel)
Terminals	High current spring terminals featuring a 5mm hole to accept up to 10AWG cable.

NOTES


- All measurements and specifications are made in accordance with AES2-2012 and in a form compatible with Dolby® Atmos™ calculator.
 - Due to continued development, specifications may change without notice.
1. Maximum AES continuous power capacity (AES2-2012) band limited test signal duration of two hours.
 2. Half space sensitivity based on partial increase due to rear wall loading at low frequencies estimated from the directivity index over operating frequency range.
 3. RMS voltage required to deliver the maximum continuous power to the loudspeaker, IEC shaped pink noise with duration of two hours.

KX-1570, KX-1570.F

COMMERCIAL CINEMA SURROUND

KX-1570

DETAILED DIMENSIONS

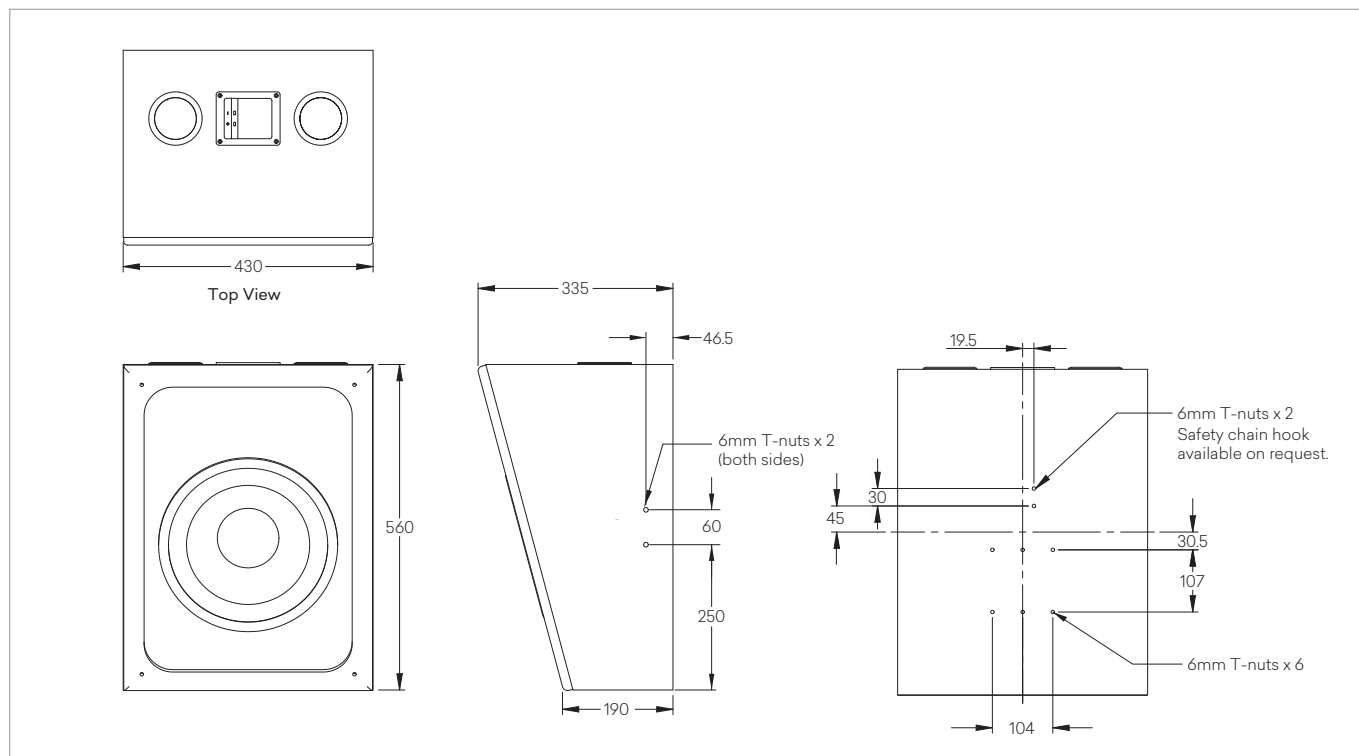

KX-1570.F

DETAILED DIMENSIONS

