

The KX-1840 is a compact cinema surround loudspeaker designed to be used where a high quality sound source is required and limited space is available. It features a 15 degree angled front baffle and an inverted driver configuration with the tweeter positioned under the bass driver. The combined high frequency response is exceptionally smooth and well controlled setting a new bench mark for surround loudspeaker reproduction. Typical applications include corner mounting in rooms with low ceilings or under balcony areas in cinemas where the projection box overhangs the seats at the back of the auditorium.

Building on a long and successful history within the cinema industry, our in-house research, development and manufacturing team deliver a strong focus on quality and rigorous production standards. Every speaker that leaves Krix has been fully tested in an advanced acoustic measurement chamber. Tight production tolerances are upheld to ensure best-in-class product quality and reliability.

FEATURES

- Inverted configuration with high frequency driver facing downwards, ideal for corner mounting in architectural spaces.
- High frequency drive unit with ferro fluid cooling, large roll surround, and doped fabric dome.
- High power 6 ½ inch woofer with polypropylene cone and 33mm voice coil.



Product code	KX-1840
Frequency range	55 - 20,000 Hz
Sensitivity (2.83V / 1m Half Space ²)	90 dB
Input power rating ¹	150 W
Impedance	8 Ω
Crossover frequency	1800 Hz
Dimensions (mm)	375 (H) x 260 (W) x 205 (D) mm
Dimensions (inches)	15 (H) x 10 ¼ (W) x 8 (D) inches
Net weight (kg)	7 kg
Net weight (lbs)	15 lbs
Baffle angle	15°

DETAILED SPECIFICATIONS

Product code	KX-1840 & KX-1840.F
Sensitivity	
1 W/m, Free space	88 dB
1 W/m, Half space ²	90 dB
2.83 V/m, Free space	88 dB
2.83 V/m, Half space ²	90 dB
Impedance	
Nominal	8 Ω
Minimum	6.8 Ω
Maximum Input Voltage ³	35 V
Maximum Input Power	
Continuous ³	150 W
Peak	600 W
Recommended Processing	Subsonic 50 Hz, >12 dB/oct
Low frequency transducers	1 x 165mm (6 1/2 inch) polypropylene cone driver, 33mm voice coil
High frequency transducer	1 x 28mm (1 inch) doped fabric dome tweeter. Ferro fluid cooled.
Enclosure	Vented QB3 alignment tuned to 55 Hz, optimally damped with polyester fibre, black vinyl finish.
Bracket	KX-91840 (shallow profile U-bracket)
Terminals	High current spring terminals featuring a 5mm hole to accept up to 10AWG cable.


NOTES

- All measurements and specifications are made in accordance with AES2-2012 and in a form compatible with Dolby® Atmos™ calculator.
 - Due to continued development, specifications may change without notice.
1. Maximum AES continuous power capacity (AES2-2012) band limited test signal duration of two hours.
 2. Half space sensitivity based on partial increase due to rear wall loading at low frequencies estimated from the directivity index over operating frequency range.
 3. RMS voltage required to deliver the maximum continuous power to the loudspeaker, IEC shaped pink noise with duration of two hours.


KX-1840

COMMERCIAL CINEMA SURROUND



DETAILED DIMENSIONS

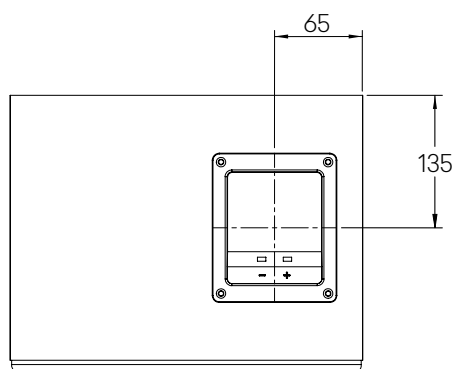

Top View

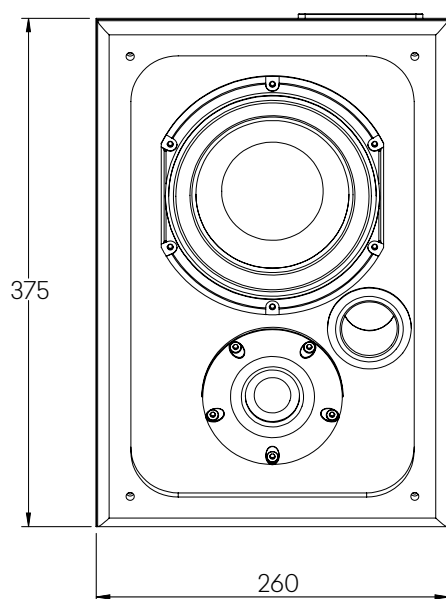

Front View

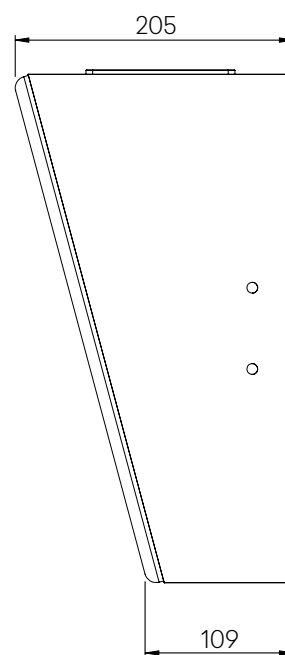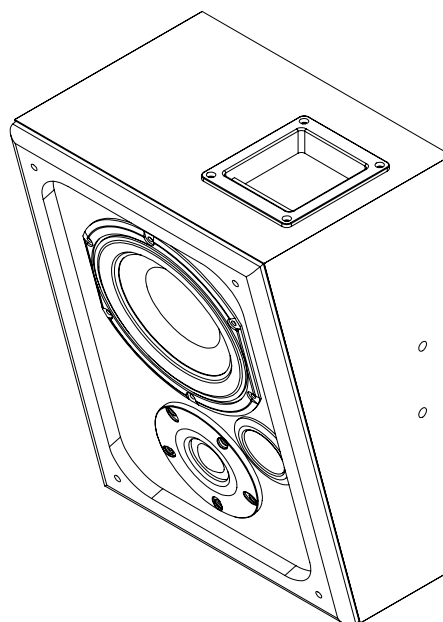

Side View

