

The KX-1870 cinema surround loudspeaker offers high power handling and high sensitivity, in a package that suits a wide range of cinema sound applications. The cabinet is braced and critically damped featuring a 15 degree angled front baffle to ensure optimum coverage within the auditorium while reducing reflections off the ceiling.

The specially damped 1 inch fabric dome tweeter coupled, with a proprietary matching waveguide offers optimised dispersion. It provides an exceptionally smooth, well controlled high frequency response setting a new bench mark for surround loudspeaker reproduction. The single 10 inch bass driver has a 2 inch vented magnet voice coil, featuring a copper shorting ring for low harmonic distortion delivering superior surround sound resolution.

Building on a long and successful history within the cinema industry, our in-house research, development and manufacturing team deliver a strong focus on quality and rigorous production standards. Every speaker that leaves Krix has been fully tested in an advanced acoustic measurement chamber. Tight production tolerances are upheld to ensure best-in-class product quality and reliability.

The KX-1870.F is available as a low profile flat version specifically designed to be flush mounted on ceiling specifically to meet Dolby® Atmos™ surround sound requirements. Also available is the low profile version, the KX-1875, developed to better suit auditoriums of limited width where the protrusion of the surround loudspeakers into the listening space should be restricted.

## FEATURES

- Constant directivity waveguide technology provides precise coverage, extremely uniform frequency response. The result is that every seat in the cinema experiences improvements in clarity and definition.
- Provision for standard 'U' bracket for fixed wall mounting in addition to pan and tilt swivel bracket for wall and ceiling applications.
- Krix engineered bass driver featuring, large vented magnet ferrite magnet, copper shorting ring and symmetrical gap geometry for minimum distortion at all levels.
- Optional safety chain bracket.



(KX-1870 shown)

| Product type                                      | Commercial cinema surround          |                                    |                                    |
|---------------------------------------------------|-------------------------------------|------------------------------------|------------------------------------|
| Frequency range                                   | 50 - 20,000 Hz                      |                                    |                                    |
| Sensitivity (2.83V / 1m Half Space <sup>2</sup> ) | 97 dB                               |                                    |                                    |
| Input power rating <sup>1</sup>                   | 250 W                               |                                    |                                    |
| Impedance                                         | 8 Ω                                 |                                    |                                    |
| Crossover frequency                               | 1800 Hz                             |                                    |                                    |
| Nominal dispersion                                | 100° Horizontal, 85° Vertical       |                                    |                                    |
| Product code                                      | KX-1870                             | KX-1870.F                          | KX-1875                            |
| Dimensions (mm)                                   | 560 (H) x 390 (W) x 320 (D) mm      | 780 (H) x 445 (W) x 150 (D) mm     | 570 (H) x 560 (W) x 240 (D) mm     |
| Dimensions (inches)                               | 22 (H) x 15 ½ (W) x 12 ½ (D) inches | 30 ¾ (H) x 17 ½ (W) x 6 (D) inches | 22 ½ (H) x 22 (W) x 9 ½ (H) inches |
| Net weight (kg)                                   | 15 kg                               | 15 kg                              | 15 kg                              |
| Net weight (lbs)                                  | 33 lbs                              | 33 lbs                             | 33 lbs                             |
| Baffle angle                                      | 15°                                 | 0°                                 | 15°                                |

## DETAILED SPECIFICATIONS

| Product code                              | KX-1870, KX-1870.F, KX-1875                                                                                                     |
|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Sensitivity</b>                        |                                                                                                                                 |
| 1 W/m, Free space                         | 95 dB                                                                                                                           |
| 1 W/m, Half space <sup>2</sup>            | 97 dB                                                                                                                           |
| 2.83 V/m, Free space                      | 95 dB                                                                                                                           |
| 2.83 V/m, Half space <sup>2</sup>         | 97 dB                                                                                                                           |
| <b>Impedance</b>                          |                                                                                                                                 |
| Nominal                                   | 8 $\Omega$                                                                                                                      |
| Minimum                                   | 7.0 $\Omega$                                                                                                                    |
| <b>Maximum Input Voltage <sup>3</sup></b> | 45 V                                                                                                                            |
| <b>Maximum Input Power</b>                |                                                                                                                                 |
| Continuous <sup>3</sup>                   | 250 W                                                                                                                           |
| Peak                                      | 1000 W                                                                                                                          |
| <b>Recommended Processing</b>             | Subsonic 50 Hz, >12 dB/oct                                                                                                      |
| <b>Low frequency transducers</b>          | 1 x 250 mm (10 inch) paper cone driver, 50 mm (2 inch) edge wound copper voice coil, aluminium former, low harmonic distortion. |
| <b>High frequency transducer</b>          | 1 x 28mm (1 inch) doped fabric dome coupled to a constant directivity waveguide. Ferro fluid cooled.                            |
| <b>Enclosure</b>                          | Vented QB3 alignment tuned to 50 Hz, internal bracing, optimally damped with polyester fibre, MDF black vinyl finish.           |
| <b>Bracket</b>                            | KX-9020 (adjustable tilt and depth), KX-91870 (shallow profile fixed U-bracket), KX-91570.S (adjustable tilt and swivel)        |
| <b>Terminals</b>                          | High current spring terminals featuring a 5mm hole to accept up to 10AWG cable.                                                 |

## NOTES


- All measurements and specifications are made in accordance with AES2-2012 and in a form compatible with Dolby® Atmos™ calculator.
  - Due to continued development, specifications may change without notice.
1. Maximum AES continuous power capacity (AES2-2012) band limited test signal duration of two hours.
  2. Half space sensitivity based on partial increase due to rear wall loading at low frequencies estimated from the directivity index over operating frequency range.
  3. RMS voltage required to deliver the maximum continuous power to the loudspeaker, IEC shaped pink noise with duration of two hours.

# KX-1870, KX-1870.F, KX1875

## COMMERCIAL CINEMA SURROUND


### KX-1870

#### DETAILED DIMENSIONS

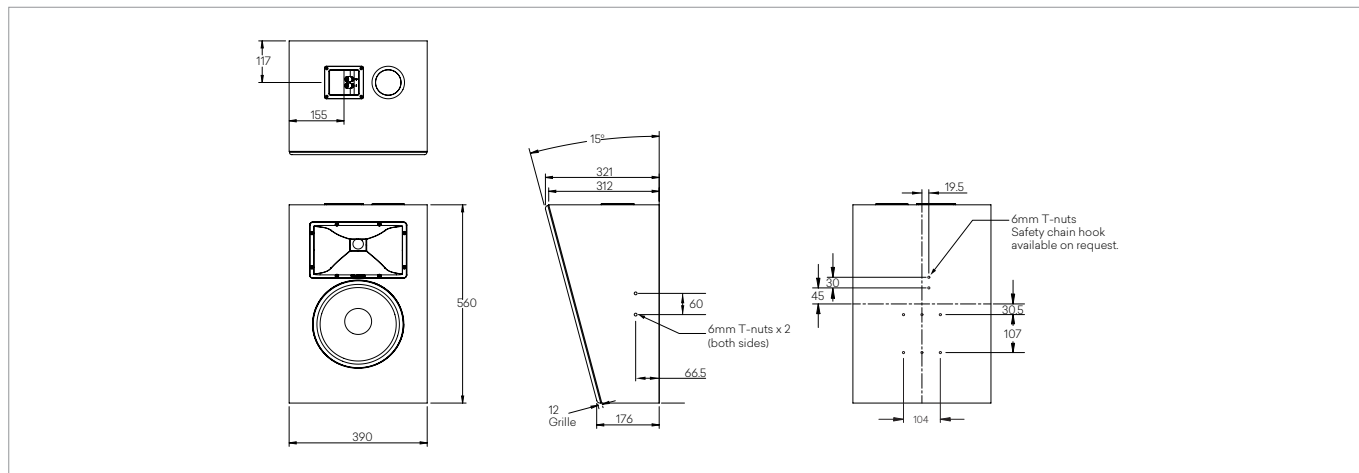

### KX-1870.F

#### DETAILED DIMENSIONS

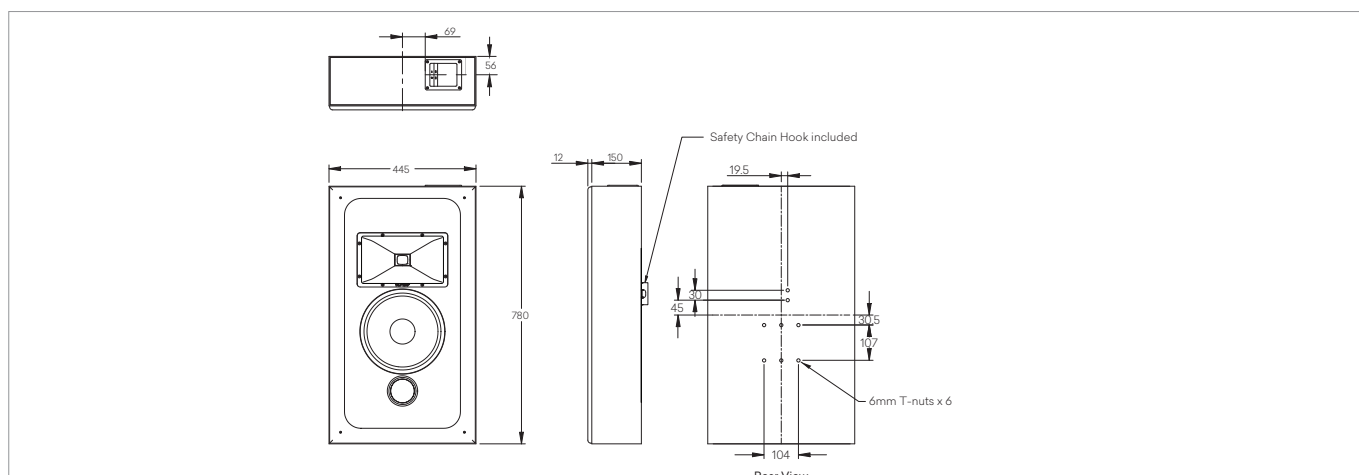

### KX-1875

#### DETAILED DIMENSIONS

