

The KX-4610 is a passive high performance cinema subwoofer, with dual 18 inch drivers. The enclosure is in a lowline format ideally suited to being positioned under the screen.

The bass driver features a 4 inch voice coil, combined with large aggregate vent area, to deliver efficient low frequency output at high power with minimal power compression and unwanted vent noise. Proprietary Krix triple 'X' bracing locks the front, rear and end panels of the enclosure together to improve structural rigidity and reduce internal standing waves.

Building on a long and successful history within the cinema industry, our in-house research, development and manufacturing team deliver a strong focus on quality and rigorous production standards. Every speaker that leaves Krix has been fully tested, tight production tolerances are upheld to ensure best-in-class product quality and reliability.

Also available in a slimline version, the KX-4610.S enclosure depth is equal to Krix screen systems to aid positioning behind the screen.

FEATURES

- 16mm peak to peak linear cone excursion capability
- Silicon coated double spider with optimised compliance
- Double sided weather proof coated cone
- Two generously proportioned 205mm vents
- Binding posts sized to accommodate up to 8mm cable



(KX-4610 shown)

Product type	Commercial cinema subwoofer	
Frequency range	25 - 200 Hz	
Sensitivity (2.83V / 1m Half Space ¹)	106 dB	
Input power rating ²	1400 W	
Impedance	4 Ω	
Product code	KX-4610	KX-4610.S
Dimensions (mm)	1200 (H) x 675 (W) x 685 (D) mm	1200 (H) x 1070 (W) x 470 (D) mm
Dimensions (inches)	47 ¼ (H) x 26 ½ (W) x 27 (D) inches	47 ¼ (H) x 42 (W) x 18 ½ (D) inches
Net weight (kg)	90 kg	
Net weight (lbs)	198 lbs	

DETAILED SPECIFICATIONS

Product code	KX-4610 & KX-4610.S
Sensitivity	
1 W/m, Free space	97 dB
1 W/m, Half space ¹	103 dB
2.83 V/m, Free space	100 dB
2.83 V/m, Half space ¹	106 dB
Impedance	
Nominal	4 Ω
Minimum	3.3 Ω
Maximum Input Voltage ³	75 V
Maximum Input Power	
Continuous ²	1400 W
Peak	5600 W
Recommended Processing	Subsonic 30 Hz, >12 dB/oct
Transducers	2 x 18 inch (455mm) paper cone bass driver, 4 inch coil, powerful vented magnet system, double spider assembly
Enclosure	Vented B4 alignment tuned to 32 Hz, Krix proprietary triple 'X' bracing', optimally damped with polyester fibre, MDF black vinyl finish.
Terminals	Krix proprietary, high current binding posts featuring an 8mm hole to accept large diameter cable. High visibility polarity indicators.

NOTES


- All measurements and specifications are made in accordance with AES2-2012 and in a form compatible with Dolby® Atmos™ calculator.
 - Due to continued development, specifications may change without notice.
1. Half space sensitivity based on partial increase due to rear wall loading at low frequencies estimated from the directivity index over operating frequency range.
 2. Maximum AES continuous power capacity (AES2-2012) band limited test signal duration of two hours.
 3. RMS voltage required to deliver the maximum continuous power to the loudspeaker, IEC shaped pink noise with duration of two hours.

KX-4610, KX-4610.S

COMMERCIAL CINEMA SUBWOOFER

KX-4610

DETAILED DIMENSIONS

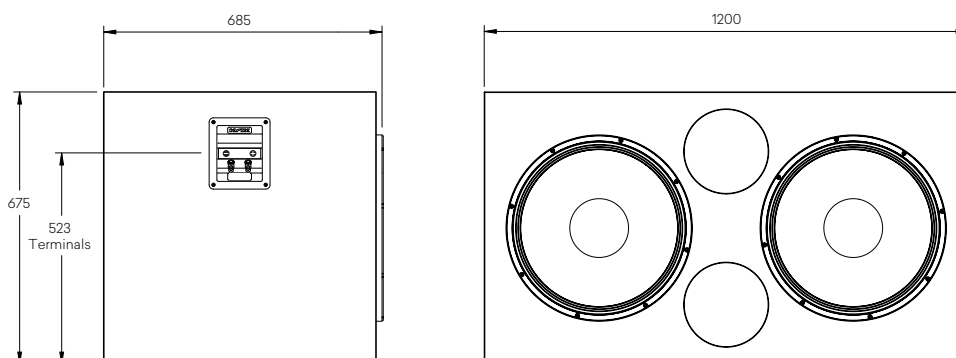

KX-4610.S

DETAILED DIMENSIONS

