

FD-52

Weather-resistant
installation speaker



Field series is a range of all-weather installation series specifically designed for stadiums, sports arenas, and other open-air locations, where speakers are exposed to critical weather conditions throughout the year.

Field series' design allows engineers to create a tailored solution for the best coverage and clarity in a clustered distributed system.

With a comprehensive range of mounting accessories designed for permanent installation, the Field series is prepared to deliver controlled sound into the most difficult installations.

FD-52 is a coaxial positioned horn-loaded 15" and 1,5" HF driver speaker in a weather-resistant IP 55 enclosure. Available with a wide selection of HF horns that provide various coverage patterns, FD-52s are versatile for long-throw and short-distance applications alike.

Attention! Field series systems are not intended for continuous high-compression low peak-factor content, typical for nightclubs and rock venues, which increase the thermal load on the loudspeakers by 2-3 times higher than the intended level. Therefore, we do not recommend using these systems for such applications, and in case of such necessity, the input power should be reduced to 40-50% of the nominal power.




SPECIFICATIONS

Frequency response (-10dB)	86 - 18000 Hz
Max SPL ¹	141 dB
Sensitivity (1W/1m)	105 dB
Drivers	15" woofer, 1,5" HF driver in a coaxial configuration
Nominal Coverage	60° x 30° (FD-52.63) 60° x 60° (FD-52.66) 90° x 30° (FD-52.93) 90° x 60° (FD-52.96) 90° x 90° (FD-52.99)
Impedance	8 Ohm
Nominal power ²	500 W
Connectors	Phoenix
Dimensions (W x H x D)	759 x 765 x 700 mm / 29,86" x 30,13 x 27,56"
Net weight	58 kg / 127,87 lbs
Shipping weight	61 kg / 134,48 lbs
Mounting	24 x M10 Mounting points
Enclosure materials	Plywood; polyurethane environmental resistant paint
Weather-protection	IP 55
Speaker protection	Steel grill, acoustically transparent backing
Color	Black (FD-52-BK) White (FD-52-WH)


¹ - pink noise, filtered according to AES 2 - 2012, crest factor 9 dB

² - based on transducer power measured according to AES 2 - 2012

DIMENSIONS

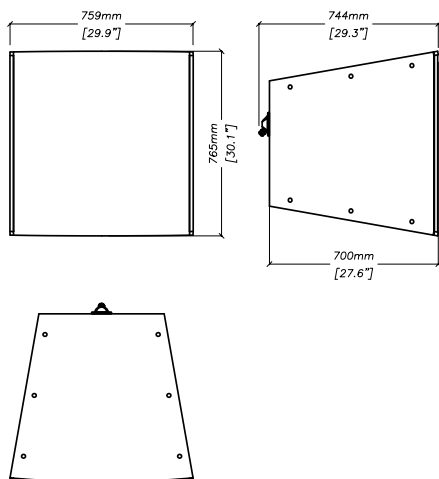


ACCESSORIES



FD-C
Connector for
FD-52, FD-S15

AMPLIFICATION

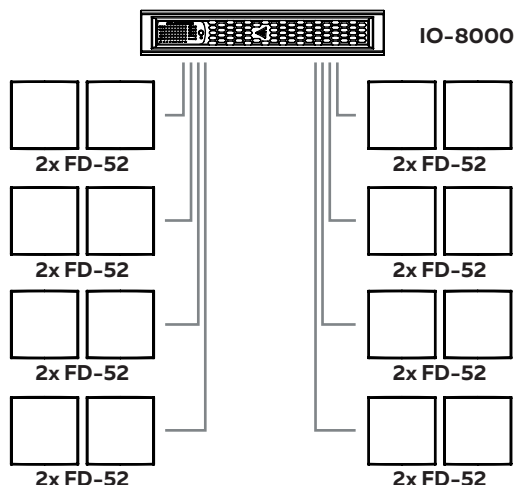

CONNECTIONS

Signal +	1 +
Signal -	1 -
High pass filter:	
Freq, no less than	55 Hz
Order, no less than	18 dB/oct
Recommended amplifier power	500 - 1000 W on nominal impedance

SAFETY INSTRUCTIONS

1. Keep liquids, direct sunlight, open flames, and heat sources away from the speaker system to prevent damage or failure.
2. Avoid using the system with damaged connectors or cables to prevent electrical shock or fire hazards.
3. Ensure the speaker is securely positioned on a stable surface (floor, stage, or wall).
4. On angled or slippery surfaces, secure the system to prevent movement caused by vibration.
5. Limit exposure to sound levels above 90 dB to prevent potential hearing damage.
6. Use a high-pass filter (HPF) to eliminate low, non-audible frequencies and avoid speaker damage and sound distortion.
7. Do not exceed the input power ratings specified to ensure safe and reliable operation of the speaker system.