

SUB 28 IP

Weather-resistant
Passive subwoofer




The Subwoofer line provides an ultimate low-frequency extension for demanding outdoor projects with IP54-rated models. These subwoofers are designed for demanding weather conditions and deliver powerful and punchy bass without compromising durability. Whether an outdoor venue, sports arena, outdoor cafe lounge, or any permanent installation, these subwoofers are built to withstand elements while offering superior sound quality.

Sub 28 IP is a passive weather-protected subwoofer based on highly effective 2 x 18" drivers. The system serves as a great tool for different applications where a serious low-end support is needed, with SPL peaking at 144,5 dB and 2000 W of nominal power.

Sub 28 IP is ready for outdoor use thanks to the IP54 weather-protection rating. The rugged enclosure is made from premium materials that protect the internal components, guaranteeing longevity and dependability. It is engineered to resist dust, splashes, and even light rain, making it ideal for both indoor and outdoor use.



DIMENSIONS

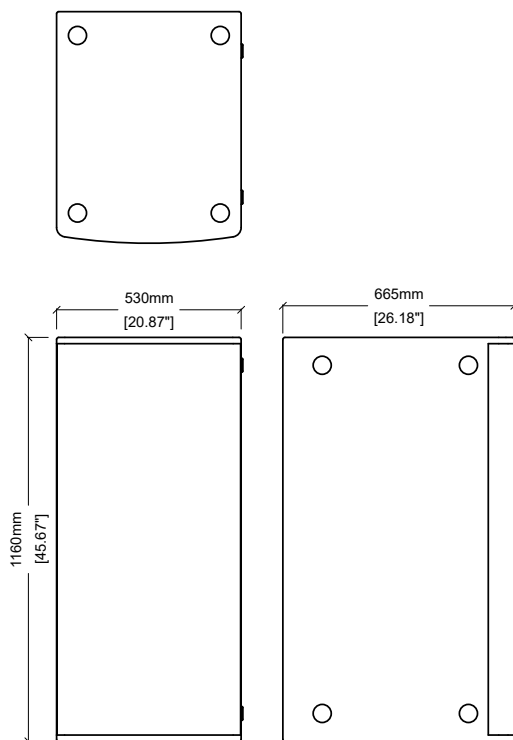

SPECIFICATIONS

Frequency Response (-10dB)	30 - 220 Hz
Peak SPL ¹	144,5 dB
Sensitivity (1W/1m)	100 dB
LF Driver	2 x 18", 4" VC
Impedance	4 Ohm
Nominal power ²	2000 W
Connectors	Phoenix / gland nut cover plate
Dimensions (W×H×D)	530 x 1170 x 665 mm
Weight (Net/Shipping)	78 kg / 81 kg
Weather protection	IP54
Enclosure material	Plywood, wear-resistant paint
Speaker protection	Steel grill, acoustically transparent backing

¹ - pink noise, filtered according to AES 2 - 2012, crest factor 12 dB

² - based on transducer power measured according to AES 2 - 2012

CONNECTIONS

Use Hi-pass filter to prevent speaker damage and distorted sound by eliminating low non-audible frequencies in input signal.

Do not exceed input power ratings mentioned in specifications while exploiting the speaker system.

Speaker system comes with two Neutrik® Speakon heavy duty sockets for easy connection.

Signal +	1 + Terminal
Signal -	1 - Terminal
High pass filter:	
Freq, no less than	25 Hz
Order, no less than	18 dB/oct
Recommended amplifier power	2000 - 4000 W on nominal impedance

SAFETY INSTRUCTIONS

1. Do not pour liquids on speaker system - this may cause driver cone destruction and unappealing speaker appearance. Do not allow direct sunlight on speaker cone in order to prevent premature failure. Do not install speaker system near open flames or heating elements.

2. Do not use speaker system with damaged speakON or speaker cable so as not to cause electric shock hazard or fire hazard.

3. Make sure speaker system is firmly set up on the floor, stage, or wall (where applicable).

4. While setting speaker system up onto an angled or slippery surface, make the necessary arrangements to avoid vibration-induced movement.

5. Speaker system is capable of delivering significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.

AMPLIFICATION

