

FOCUS SUB

Passive monitor
subwoofer



Focus Sub is a speaker system delivering high sound pressure levels for professional sound reinforcement applications.


The next-generation versatile stage subwoofer, Focus Sub was created for demanding performers wishing for clarity and comfort on the stage.

Packed with 15" coaxial driver, Focus Sub offers perfect phase coherence and a focused sound picture.

A reinforced all-plywood enclosure is covered with rigid scratch-resistant coating and is ready for hardships of the touring life.



DIMENSIONS

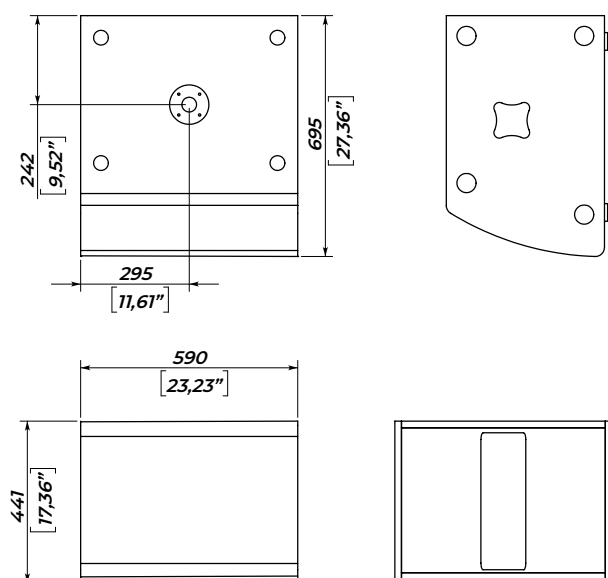

SPECIFICATIONS

Frequency response (-10dB)	38 – 200 Hz
Max SPL ¹	139 dB
Sensitivity (1W/1m)	98 dB
LF driver	15", 4" VC
Impedance	8 Ohm
Nominal power ²	1000 W
Connectors	2x Neutrik Speakon
Dimensions (W x H x D)	590 x 441 x 695 mm / 23,23" x 17,36" x 27,36"
Net weight	35 kg / 77 lbs
Shipping weight	37 kg / 81,6 lbs
Mounting	M20 distance pole adapter
Enclosure materials	Plywood; wear-resistant paint
Grill	Steel grill, acoustically transparent backing

¹ - pink noise, filtered according to AES 2-2012, crest factor 12 dB
² - based on transducer power measured according to AES 2 - 2012

SAFETY INSTRUCTIONS

1. Do not pour liquids on speaker system – this may cause driver cone destruction and unappealing speaker appearance. Do not allow direct sunlight on speaker cone in order to prevent premature failure. Do not install speaker system near open flames or heating elements.
2. Do not use speaker system with damaged speakON or speaker cable so as not to cause electric shock hazard or fire hazard.
3. Make sure speaker system is firmly set up on the floor, stage, or wall (where applicable).
4. While setting speaker system up onto an angled or slippery surface, make the necessary arrangements to avoid vibration-induced movement.
5. Speaker system is capable of delivering significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.

CONNECTIONS

Use Hi-pass filter to prevent speaker damage and distorted sound by eliminating low non-audible frequencies in input signal.
Do not exceed input power ratings mentioned in specifications while exploiting the speaker system.
Speaker system comes with two Neutrik® Speakon heavy duty sockets for easy connection.

Connection	
Signal +	1 +
Signal -	1 -
High pass filter Freq.	40 Hz
High pass filter Order.	18 dB/oct
Recommended amplifier power	700 – 1400 W on nominal impedance (per cabinet)

