

# PD-3x4

Power  
Distributor




The PD-3x4 is a power distributor that has a metal case standard 19" with a 3U front connecting panel for mounting, providing ultimate mounting convenience for any installation.

The PD-3x4 can be used in a wide with different sets of MAG Audio systems. This Power Distributor installs in the sound racks MN Mounting, a touring-grade AmpRack, and MAG Audio WAR fly racks hanging universal racks for group setups, and has a wide range of different applications, with many inputs and outputs installed on the panel.

The Power Distributor provides convenient and easy connections to a variety of different audio and cinema equipment.



## DIMENSIONS

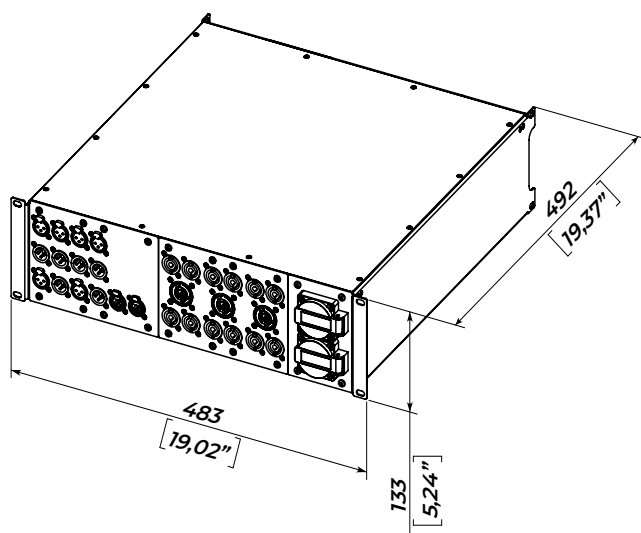

## SPECIFICATIONS

|                          |                                                        |
|--------------------------|--------------------------------------------------------|
| Functions                | Power Distributor                                      |
| Rack Install 19"         | 3U                                                     |
| Power Input              | AC 16A 230V VAC                                        |
| Analog signal connection | 4 x XLR input;<br>4 x XLR link                         |
| AES/EBU                  | 2 x XLR input;<br>2 x XLR link                         |
| Ethernet                 | 2 x EtherCon                                           |
| Speaker outputs          | 12 x Speakon 4 pin,<br>3 x Speakon 8 pin               |
| Main connections         | CEE 32 3P+N+E (32A) input;<br>CEE 32 3P+N+E (32A) link |
| Power output             | 3 x Powersoft X-Series,<br>2 x AUX SHUCKO              |
| Conectors                | Neutrik;<br>PCE                                        |
| Color                    | Black                                                  |
| Dimensions               | 492 x 483 x 133 mm /<br>19,37" x 19,02" x 5,24"        |
| Shipping dimensions      | 560 x 510 x 155 mm /<br>22,05" x 20,1" x 6,1"          |
| Net weight               | 13,2 kg / 29 lbs                                       |
| Shipping weight          | 14,5 kg / 32 lbs                                       |

## SAFETY INSTRUCTIONS

1. Do not pour liquids on the speaker system this may cause driver cone destruction and an unappealing speaker appearance. Do not allow direct sunlight on the speaker cone in order to prevent premature failure. Do not install a speaker system near open flames or heating elements.
2. Do not use a speaker system with damaged connectors or speaker cables so as not to cause an electric shock hazard or fire hazard.
3. Make sure the speaker system is firmly set up on the floor, stage, or wall (where applicable).
4. While setting the speaker system up on an angled or slippery surface, make the necessary arrangements to avoid vibration-induced movement.
5. The speaker system is capable of delivering significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.