

SUB 28A

Powered
subwoofer




Subwoofer line serves as an ultimate low frequency reinforcement range that represents all-purpose solutions, capable of fitting into the specific demands of any and all innovative projects.

Passive and powered cabinets are ready for mobile applications, as well as permanent installations, concerts and touring.

High-power and light-weight solution, Sub 28A is a powered subwoofer equipped with two 18" neodymium long-excursion drivers. Great for powerful mobile and fixed installations alike, it is conveniently fitted with two distance pole sockets for any system setup.


DIMENSIONS

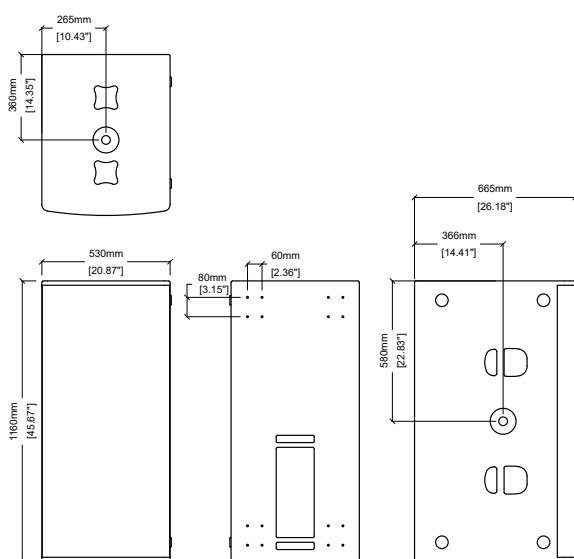

SAFETY INSTRUCTIONS

1. Do not pour liquids on speaker system - this may cause driver cone destruction and unappealing speaker appearance. Do not allow direct sunlight on speaker cone in order to prevent premature failure. Do not install speaker system near open flames or heating elements.
2. Do not use speaker system with damaged speakON or speaker cable so as not to cause electric shock hazard or fire hazard.
3. Make sure speaker system is firmly set up on the floor, stage, or wall (where applicable).
4. While setting speaker system up onto an angled or slippery surface, make the necessary arrangements to avoid vibration-induced movement.
5. Speaker system is capable of delivering significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.

ACCESSORIES



Mounting on wheels

WH-0990

WH-0985



SPECIFICATIONS

Frequency Response (-10dB)	30 - 170 Hz
Max SPL (calculated)	141,5 dB
LF Driver	2 x 18", 4" VC
Amplifier power	3000 W
Amplifier	Class D, fan cooling, DSP
Input sensitivity	0 dBV (1 V RMS)
Connectors	XLR input, XLR output, Powercon mains
Dimensions (W x H x D)	530 x 1170 x 665 mm
Weight (Net/Shipping)	81 kg / 84 kg
Mounting	2 x M20 distance pole adapter 4 x 4 M10 mounting on wheels
Enclosure material	Plywood, wear-resistant paint
Speaker protection	Steel grill, acoustically transparent backing

CONNECTIONS

SUBWOOFER series powered systems are supplied with CN-0010 PowerCon-E/F CEE 7/7 mains cable (part number 00-00005561). Use only original or supplied by manufacturer mains cables!

SUBWOOFER series powered systems are equipped with PowerCon B mains power outlets for mains link to additional SUBWOOFER series powered system.

SUBWOOFER series systems' nominal mains power specifications: AC 220V, 50/60 Hz.

Nominal voltage tolerance: 100 - 250 V.

SUBWOOFER series systems are equipped with XLR INPUT and XLR LINK connectors for signal connection.

Use of balanced XLR connector cables is recommended. In case when balanced XLR connections are not available, unbalanced XLR connection is acceptable.

For linking the additional system to the same signal bus, LINK connector may be used.