


The Nice logo consists of a solid blue square with the word "Nice" in white, sans-serif font centered within it.

EL-4KM-V44-18G

4x4 HDBaseT Matrix-70m

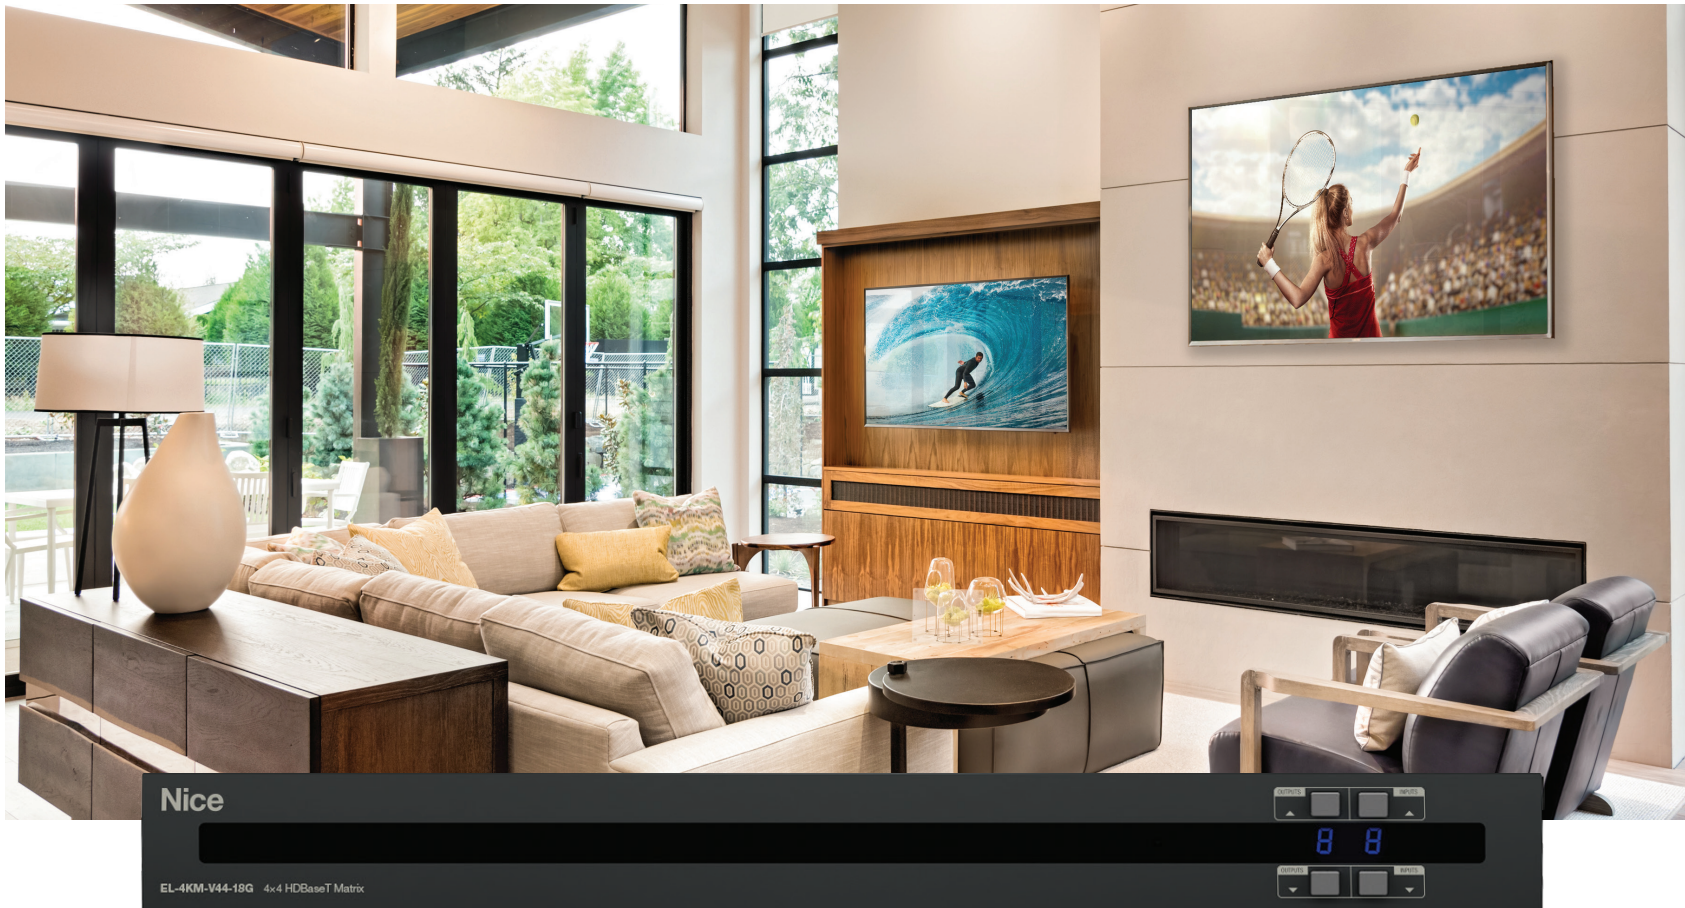

4x4 HDBaseT matrix offers unprecedented performance and value

The Nice EL-4KM-V44-18G 4x4 HDBaseT matrix offers unprecedented performance and value for the custom installation market. The EL-4KM-V44-18G is a HDMI 2.0 4K 60Hz 4:4:4 HdCP 2,2 matrix utilizing CSC technology to deliver HDMI, Bi-directional IR and PoC up to lengths of 70m over a single CAT cable.

The Matrix also provides advanced features including simultaneous HDBaseT / HDMI on output 1, video down conversion on HDBaseT outputs, and a web browser interface module for control and configuration on the matrix.

WORKS WITH ELAN
CONTROL SYSTEMS
ELAN
a Nice brand

EL-4KM-V44-18G 4x4 HDBaseT Matrix – 70m



Features

- Advanced HDBaseT technology enables distribution of video and audio over a single CAT cable
- Advanced Color Space Conversion (CSC) supports HDMI 2.0 18Gbps specification including HDR
- The four (4) HDMI inputs can be independently routed to four (4) HDBaseT outputs
- Output 1 features simultaneous HDMI and HDBaseT output
- Video down-conversion on HDBaseT outputs allowing a display only capable of supporting lower video resolutions (4K 60Hz 4:2:0, or 1080p) to receive 4K 60Hz 4:4:4 video content, while still showing maximum original 4K UHD resolution on remaining video outputs
- Supports 4K 60Hz 4:4:4 UHD video up to 40m, and 1080p video up to 70m
- Supports all industry standard video resolutions including VGA-WUXGA and 480i-4K and all known HDMI audio formats including Dolby TrueHD, Dolby Atmos, Dolby Digital Plus, and DTS-HD Master Audio transmission
- Control via front panel, IR, RS-232, and TCP/IP
- Supports PoC (Power over Cable) to power compatible HDBaseT receivers
- Advanced EDID management and HDCP 2.2 compliant

Specifications

Video Input Connectors	4 x HDMI Type A, 19-pin, female
Video Output Connectors	1 x HDMI Type A, 19-pin, female, 4 x HDBaseT RJ45 connectors
RS-232 Serial Port	1 x 3-pin Phoenix connector
IR Input Ports	5 x 3.5mm stereo jack
IR Output Ports	4 x 3.5mm mono jack
Rack-Mountable	1 U rack height, rack ears included
Casing Dimensions (W x D x H)	437mm x 44mm x 377mm (without feet)
Shipping weight	6.25 Kg
Operating Temperature	32°F to 104°F (-5°C to 55°C)
Storage Temperature	-4°F to 140°F (-25°C to 70°C)
Power Supply	Internal 100-240V DC
HDBT Power Output	12V DC 0.84A Per Port

PACKAGE CONTENTS

- (1) EL-4KM-V44-18G
- (1) Rack mounting kit
- (1) Remote control
- (4) IR emitters
- (5) IR receivers
- (1) RS-232 control cable
- (1) IR control cable – 3.5mm to 3.5mm cable
- (1) Quick reference guide
- (4) IEC power cables (US, UK, EU and AU)