

Gear Oil Change - Stark VARG

Video link: <https://www.youtube.com/watch?v=24lAXWuuTGI>

Source video: Gear Oil Change - Stark VARG by Stark Future Official

Applicable models: MX

Scope

This guide follows the same step-by-step workshop structure as the MX tutorials, but it is derived as a visual sequence from the official Stark Future ASMR video. Because the source video does not provide usable captions or narration, the procedure is documented through curated screenshots and concise action guidance.

Preparation

- Place the bike on a stable stand or work area before starting the procedure.
- Prepare the correct tools for the fasteners, clips, brackets, and components shown in the video.
- Keep removed hardware organized in sequence so reassembly follows the same order as the video.
- Have a torque wrench ready for any tightening steps that specify a torque value.

Procedure

1. Prepare access to the gear oil service points

Place the bike on a stable stand and remove any cover or guard shown in the video that blocks the gear oil fill and drain points.



2. Position a container under the drain point

Place a suitable drain container under the bike before removing the gear oil drain hardware.



3. Open the fill and drain points

Loosen the drain plug and the right motor cover metal cap so the old gear oil can drain fully.



4. Drain the old gear oil

Allow the old oil to drain completely while monitoring the drain container and the service opening.

Lean the bike slightly to the right if needed to help the used oil drain more completely.



5. Reinstall the drain hardware

Fit a new washer to the drain plug and reinstall it once draining is complete.

Tighten the drain plug to **15 Nm**.



6. Refill with fresh gear oil

Remove the oil level bolt, make sure the bike is level, and fill with fresh oil until it starts to come out from the level bolt opening.

Fit a new washer to the level bolt and tighten it to **5 Nm**.



7. Close the fill point and clean the area


Tighten the right motor cover metal cap to **5 Nm** and wipe any spilled oil from the surrounding parts.



8. Reinstall removed parts and inspect for leaks

Reinstall any removed guards or covers and check the service area for leaks before returning the bike to use.

Tighten the skid plate bolts to **15 Nm**.

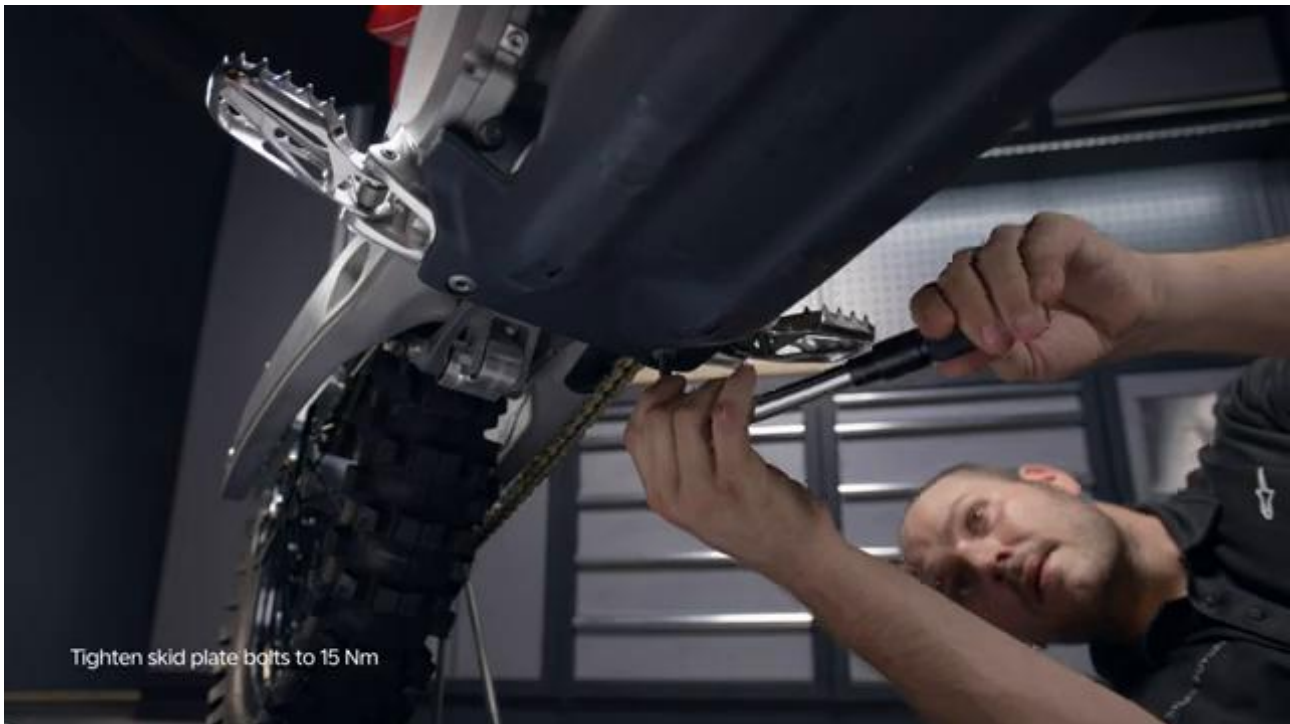

Torque Summary

Component	Torque
Tighten the drain plug	15 Nm
Tighten the level bolt	5 Nm
Tighten the right motor cover metal cap	5 Nm
Tighten the skid plate bolts	15 Nm

Verified torque items:

- Tighten the drain plug: **15 Nm** from Stark technical manual 07.019.06 Change gear oil.
- Tighten the level bolt: **5 Nm** from Stark technical manual 07.019.06 Change gear oil.
- Tighten the right motor cover metal cap: **5 Nm** from Stark technical manual 07.019.06 Change gear oil.
- Tighten the skid plate bolts: **15 Nm** from Stark technical manual 05.041.01 Remove and install skid plate.

Critical Checks Before Riding

- Confirm the serviced component is fully seated and all fasteners are tightened in the correct order.
- Recheck all torque-critical hardware before riding.
- Make sure all routed cables, clips, brackets, and surrounding parts are returned to their original positions.
- Inspect the bike visually for any missing hardware before returning it to service.