

Remove and Install Side Stand - Stark VARG

Video link: <https://www.youtube.com/watch?v=Y32ZHBcOuaA>

Source video: Remove and Install Side Stand - Stark VARG by Stark Future Official

Applicable models: MX

Scope

This guide follows the same step-by-step workshop structure as the MX tutorials, but it is derived as a visual sequence from the official Stark Future ASMR video. Because the source video does not provide usable captions or narration, the procedure is documented through curated screenshots and concise action guidance.

Preparation

- Place the bike on a stable stand or work area before starting the procedure.
- Prepare the correct tools for the fasteners, clips, brackets, and components shown in the video.
- Keep removed hardware organized in sequence so reassembly follows the same order as the video.
- Have a torque wrench ready for any tightening steps that specify a torque value.

Removal Procedure

1. Prepare access to the Side Stand

Remove or move aside the surrounding part, cover, or hardware needed to reach the Side Stand.

Keep the removed fasteners organized in sequence so reassembly matches the video.



2. Remove the visible retaining hardware for the Side Stand

Remove the bolts, screws, nuts, or clips that directly secure the Side Stand.

Support the component as the last fastener is removed.



3. Release any bracket, clip, or coupling attached to the Side Stand

Free any bracket, clip, spacer, linkage, or connector that still ties the Side Stand to the bike.

Note the orientation of these supporting pieces before setting them aside.



4. Remove the Side Stand from the bike

Lift, slide, or guide the Side Stand out of its mounting position once the retaining hardware is removed.

Inspect the removed part and the mounting points before reassembly.



Installation Procedure

5. Position the Side Stand for installation

Return the Side Stand and rubber strap to their mounting position and align the holes, tabs, or locating surfaces.

Hold the component in place until the first retaining hardware is started.



6. Reconnect or refit the support pieces for the Side Stand

Reinstall the side stand bracket and related support pieces for the Side Stand.

Apply grease to the bushing and O-rings before the bracket is fully seated.



7. Install the retaining hardware for the Side Stand

Install the main retaining hardware for the Side Stand by hand first, then tighten it evenly.

Clean the side stand leg bolt, apply medium strength thread locker, and fit the side stand leg through the rubber strap before final tightening.

Tighten the side stand bracket bolts to **20 Nm**.


Tighten the side stand leg bolt to **35 Nm**.



8. Verify the completed installation of the Side Stand

Hook the side stand springs back onto the top bolt and spring plate, then inspect the final position of the Side Stand.

Confirm the springs are rehooked correctly and check the component for correct fit and movement before returning the bike to service.

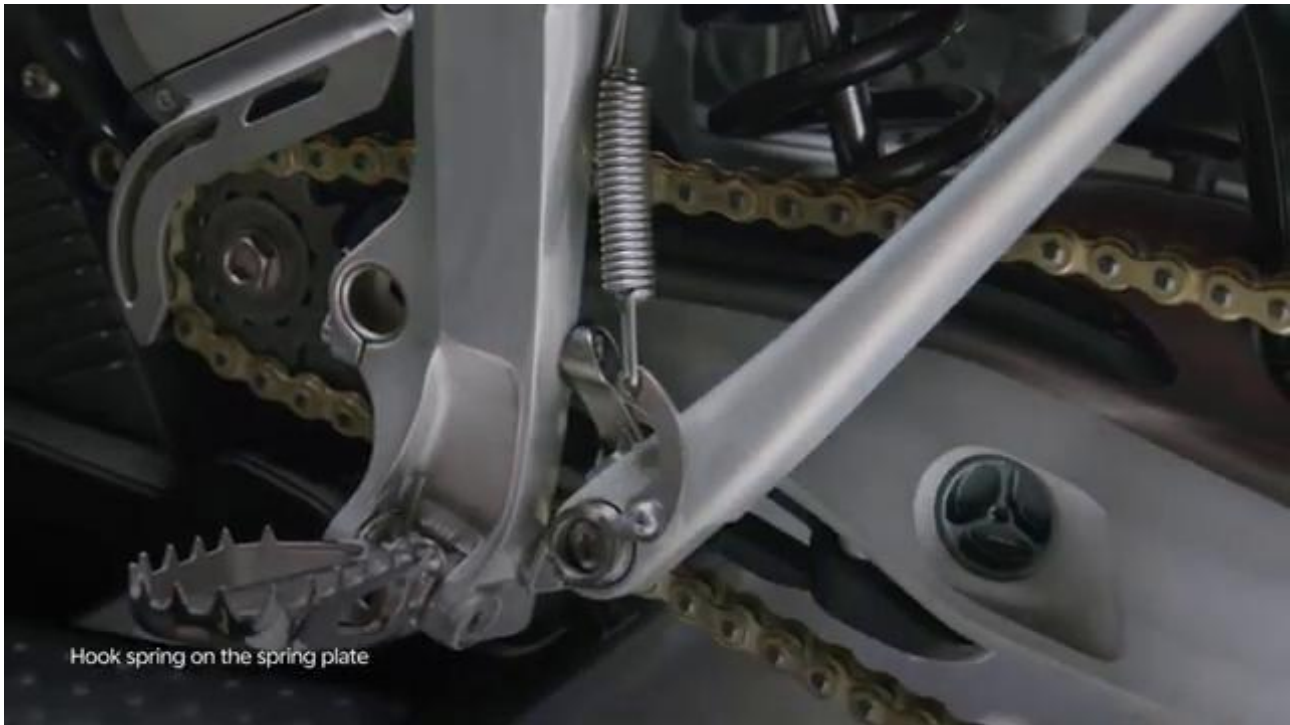

Torque Summary

Component	Torque
Tighten the side stand bracket bolts	20 Nm
Tighten the side stand leg bolt	35 Nm

Verified torque items:

- Tighten the side stand bracket bolts: **20 Nm** from Stark technical manual 05.038.01 Remove and install side stand.
- Tighten the side stand leg bolt: **35 Nm** from Stark technical manual 05.038.01 Remove and install side stand.

Critical Checks Before Riding

- Confirm the serviced component is fully seated and all fasteners are tightened in the correct order.
- Recheck all torque-critical hardware before riding.
- Make sure all routed cables, clips, brackets, and surrounding parts are returned to their original positions.
- Inspect the bike visually for any missing hardware before returning it to service.