

Implementation of a CAN/CAN-FD Bus Transmitter in VHDL

Mads Richardt (s224948)

February 28, 2026

Contents

1	Design and Architecture	1
1.1	System Overview	1
1.1.1	LLC Frame Format	1
1.2	Interface Definition Tables	3
1.3	Protocol-Driven Type System	11
1.4	LLC Sub-layer	11
1.4.1	can_llc_tx	11
1.4.2	can_llc_rx	11
1.5	MAC Sub-layer	11
1.5.1	can_mac_tx	12
1.5.2	can_mac_rx	12
1.6	PCS Sub-layer	12
1.6.1	can_pcs_tx	12
1.6.2	can_pcs_rx	12

1 Design and Architecture

1.1 System Overview

A complete CAN node is composed of a Transmit (TX) path and a Receive (RX) path coordinated by shared fault-confinement and physical-interface control. The paths operate in parallel at runtime, but they are not symmetric in behavior or responsibility. The focus of this thesis is the complete node architecture and its standards-traceable interfaces. The TX path is responsible for frame submission, arbitration participation, and bitstream generation toward the bus, while the RX path is responsible for bus observation, frame reconstruction, and delivery/notification toward the user layer. As shown in Figure 1, this full-node decomposition spans LLC, MAC, PCS, FCE, and PMA boundaries.

1.1.1 LLC Frame Format

The current LLC Frame format is depicted in Figure 2 with the ID byte format depicted in Table 1. The revised LLC Frame supporting FD is depicted in Figure 3. The revised format adds a 3-bit FMT (ISO 6.4.3) field to the DLC byte, expands the data field to 64 bytes, and repurposes reserved bits in the last byte for BRS and ESI flags. The FMT encodes the supported frame formats as ‘000’ = CB, ‘100’ = CE, ‘010’ = FB, ‘110’ = FE. Accordingly, for the frame content to be self-consistent the IDE bit must be set to 0 for FMT = CB/FB and 1 for FMT = CE/FE. The revised format is designed to be backward compatible: an implementation that only supports Classic frames can simply ignore the FMT bits and treat all frames as Classic, while an implementation that supports FD can use the FMT field to distinguish frame types without affecting the

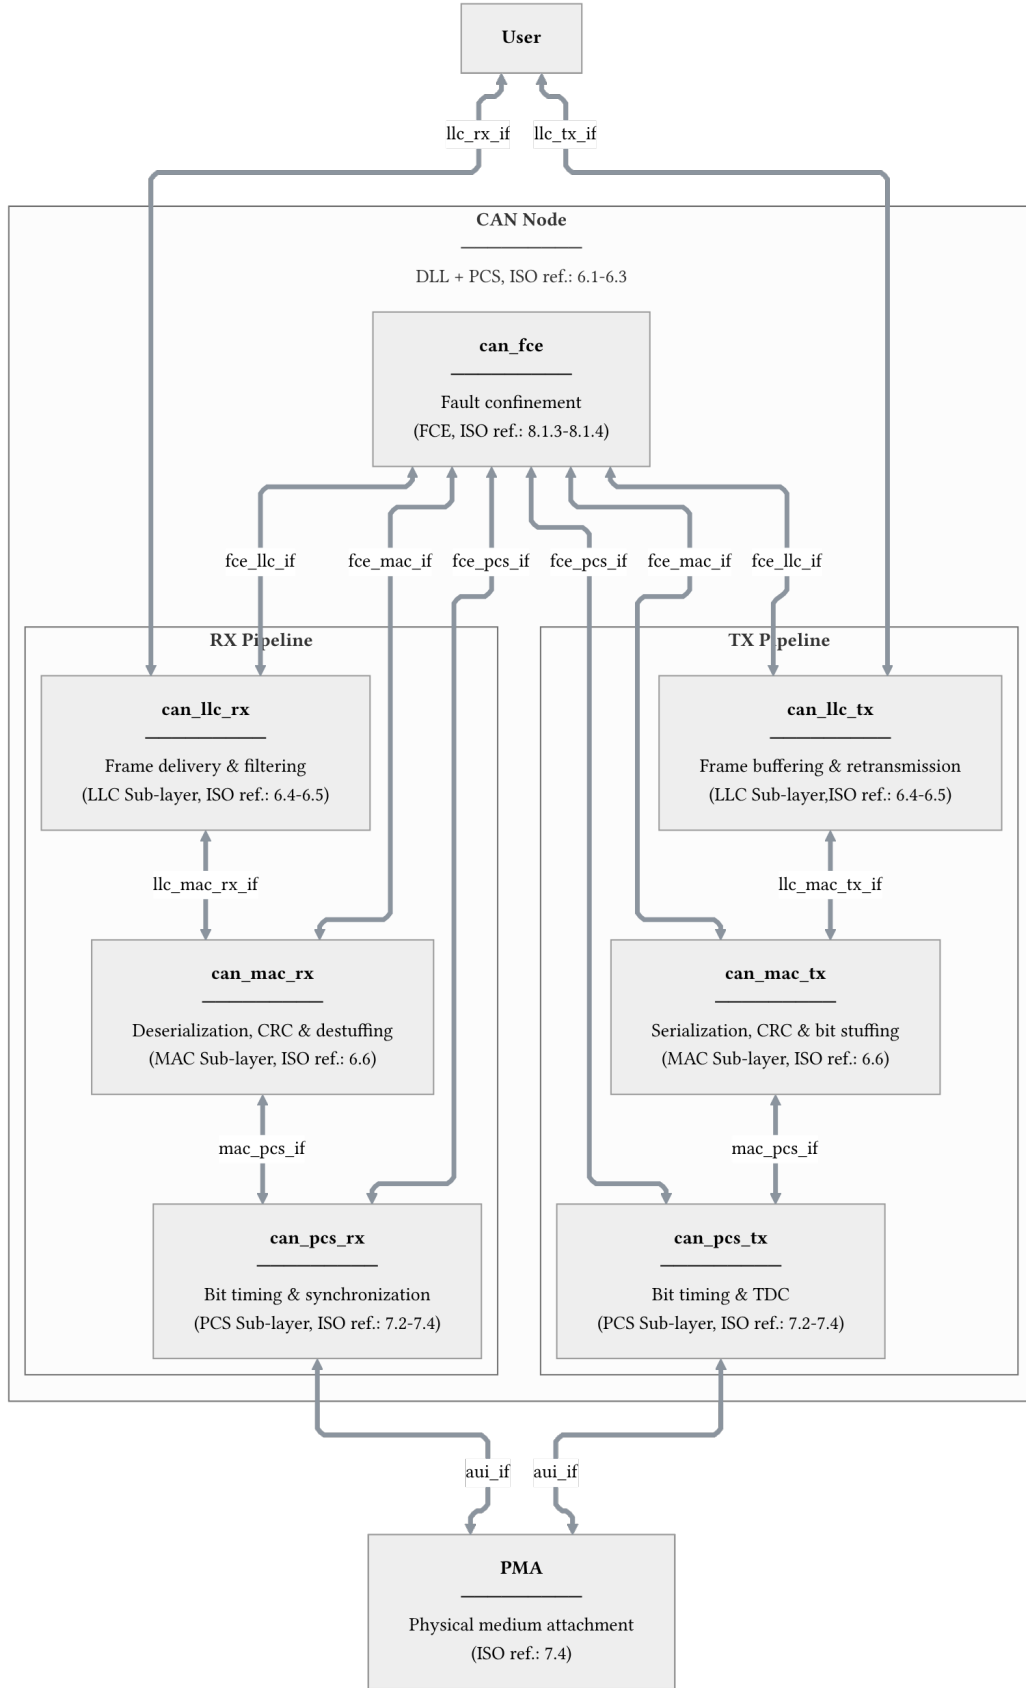


Figure 1: CAN node decomposition across LLC, MAC, PCS, FCE, and PMA boundaries. Interface definitions are provided for `llc_tx_if` (Table 2), `llc_rx_if` (Table 3), `llc_mac_tx_if` (Table 4), `llc_mac_rx_if` (Table 5), `mac_pcs_if` (Table 6), `aui_if` (Table 7), `fce_llc_if` (Table 8), `fce_mac_if` (Table 9), and `fce_pcs_if` (Table 10).

existing ID and data field structure.

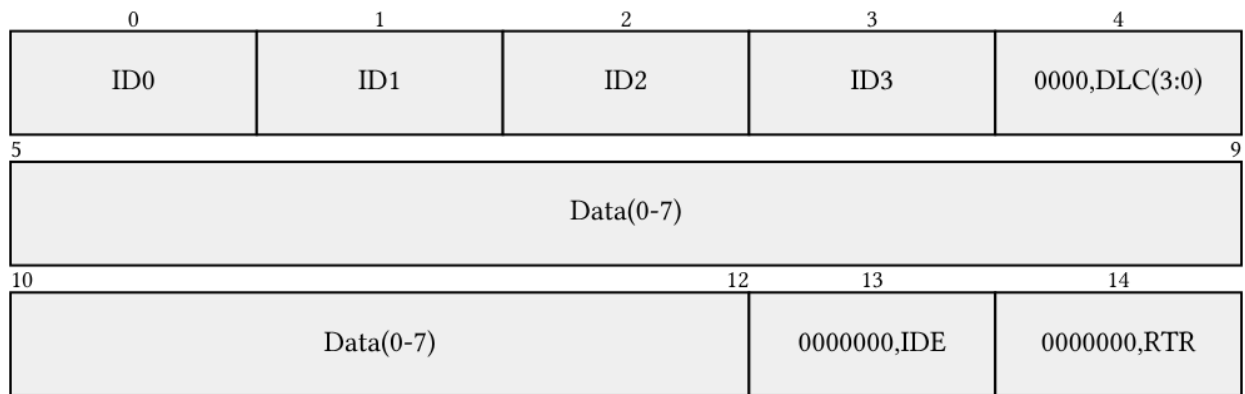


Figure 2: Current 15 byte LLC Frame format.

Table 1: Four ID byts of the current LLC frame format.

Format	Byte ID0	Byte ID1	Byte ID2	Byte ID3
Basic	'00000000'	'00000000'	'00000' & 'ID(10-8)'	'ID(7-0)'
Extended	'000' & 'ID(28:24)'	'ID(23-16)'	'ID(15-8)'	'ID(7-0)'

1.2 Interface Definition Tables

The following tables define the interface bundles shown in Figure 1. ISO references are to ISO 11898-1:2024 clauses and tables.

Detailed interface definitions (normative source mapping):



Figure 3: Maximum length revised LLC Frame format with FD support.

Table 2: Interface definition for `llc_tx_if`. Implements `L_Data.Request` as an Avalon-ST byte stream. `L_Data.AbortRequest` is included for complete ISO service coverage but is not yet implemented.

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
6.4.5.5.2	<code>L_Data.Request</code>	LLC Frame, Handle	Submit LLC frame for transmission	User -> LLC	<code>llc_tx_if.data (byte_t)</code> , <code>llc_tx_if.valid (std_logic)</code> , <code>llc_tx_if.sop (std_logic)</code>	valid high with byte on data; sop asserted on first byte
6.4.5.5.2	<code>L_Data.Request</code>	LLC Frame, Handle	Submit LLC frame for transmission	User -> LLC	<code>llc_tx_if.data (byte_t)</code> , <code>llc_tx_if.valid (std_logic)</code>	valid high; sop and eop deasserted on intermediate bytes
6.4.5.5.2	<code>L_Data.Request</code>	LLC Frame, Handle	Submit LLC frame for transmission	User -> LLC	<code>llc_tx_if.data (byte_t)</code> , <code>llc_tx_if.valid (std_logic)</code> , <code>llc_tx_if.eop (std_logic)</code>	valid high with byte on data; eop asserted on last byte
6.4.5.5.2	<code>L_Data.Request</code>		Flow control	LLC -> User	<code>llc_tx_if.ready (std_logic)</code>	Asserted by LLC when able to consume next byte
6.4.5.5.3	<code>L_Data.AbortRequest</code>	Handle	Abort pending frame transfer	User -> LLC	<code>llc_tx_if.abort_request (std_logic)</code>	Pulse when user wants to cancel an in-progress transfer

Table 3: Interface definition for `llc_rx_if`. Implements `L_Data.Indication` as an Avalon-ST byte stream. Timestamp is included for complete ISO service coverage but is not yet implemented.

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
6.4.5.5.5	<code>L_Data.Indication</code>	LLC Frame, Timestamp	Deliver received LLC frame to user	LLC -> User	<code>llc_rx_if.data (byte_t)</code> , <code>llc_rx_if.valid (std_logic)</code> , <code>llc_rx_if.sop (std_logic)</code>	valid high with byte on data; sop asserted on first byte

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
6.4.5.5.5	L_Data.Indication	LLC Frame, Timestamp	Deliver received LLC frame to user	LLC -> User	llc_rx_if.data (byte_t), llc_rx_if.valid (std_logic)	valid high; sop and eop deasserted on intermediate bytes
6.4.5.5.5	L_Data.Indication	LLC Frame, Timestamp	Deliver received LLC frame to user	LLC -> User	llc_rx_if.data (byte_t), llc_rx_if.valid (std_logic), llc_rx_if.eop (std_logic)	valid high with byte on data; eop asserted on last byte
6.4.5.5.5	L_Data.Indication		Flow control	User -> LLC	llc_rx_if.ready (std_logic)	Asserted by user when able to consume next byte
6.4.5.5.4	L_Data.Confirm	Transfer_Status, Timestamp, Handle	Report outcome of prior L_Data.Request	LLC -> User	llc_rx_if.transfer_status (transfer_status_t)	Issued on frame completion, loss, or error

Table 4: Interface definition for llc_mac_tx_if. Frame length is self-describing from the DLC config bytes; the MAC serializer does not consume eop.

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
6.3, 6.6.4.2	DLL SDU	LLC Frame	Transfer LLC frame to MAC for serialization	LLC -> MAC	llc_mac_tx_if.data (byte_t), llc_mac_tx_if.valid (std_logic), llc_mac_tx_if.sop (std_logic)	valid high with byte on data; sop marks first byte of new frame
6.3, 6.6.4.2	DLL SDU		Flow control	MAC -> LLC	llc_mac_tx_if.ready (std_logic)	Asserted by MAC serializer when able to consume next byte
6.6.4.2	Interface control information	Transfer_Status	Report frame transmission outcome	MAC -> LLC	llc_mac_tx_if.transfer_status (transfer_status_t)	Updated by MAC on completion, loss, or error

Table 5: Interface definition for `llc_mac_rx_if`.

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
6.6.4.3, 6.6.9	DLL SDU	Reconstructed LLC Frame	Transfer reconstructed LLC frame to LLC	MAC -> LLC		Issued when MAC has reconstructed a frame from the received bitstream
6.6.3	Time reference notification	SOF/frame-valid indication	Provide timing reference for timestamping	MAC -> LLC		Generated for transmitted/received DF/RF

Table 6: Interface definition for `mac_pcs_if`. The `D_Transmit` status is encoded directly in `mac_pcs_if.data.bit_name` rather than as a separate signal - the PCS derives data-phase entry and exit from the protocol-semantic bit name, eliminating the need for a redundant boolean flag.

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
7.2.1, 7.2.2	PCS_Data.Request	Output_Unit	Present next bit for transmission	MAC -> PCS	<code>mac_pcs_if.data</code> (<code>mac_frame_bit_t</code>)	MAC holds bit stable; PCS samples data at each bit boundary autonomously
7.2.1, 7.2.5	PCS_Status.Transmitter	D_Transmit	Indicate FD data-phase interval to PCS	MAC -> PCS	<code>mac_pcs_if.data.bit_name</code> (<code>mac_frame_bit_name_t</code>)	PCS enters data phase at <code>fdf_bit</code> SP, exits at <code>crc_delimiter_bit</code> or error flag boundary
7.2.1, 7.2.3	PCS_Data.Indicate	Input_Unit	Indicate bus polarity at sample point	PCS -> MAC	<code>mac_pcs_if.bus_polarity</code> (<code>polarity_t</code>), <code>mac_pcs_if.sample_strobe</code> (<code>std_logic</code>), <code>mac_pcs_if.strobe_type</code> (<code>strobe_type_t</code>), <code>mac_pcs_if.fifo_index</code> (<code>integer</code>)	<code>sample_strobe</code> pulses once per SP/SSP; <code>strobe_type</code> distinguishes SP from SSP for TDC

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
7.2.1, 7.2.6	PCS_Status.Receiver	D_Receive	Indicate FD data-phase interval to PCS	MAC -> PCS	not yet implemented	Asserted during FD data-phase reception

Table 7: Interface definition for aui_if.

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
7.4.2.1	output symbol	Dominant/recessive symbol	Drive physical output symbol	PCS -> PMA	aui_if.tx(std_logic)	Updated on each Output_Unit request
7.4.2.2, 8.1.3.4	bus_off symbol	Bus-off control	Switch node off bus	PCS -> PMA	aui_if.bus_off(std_logic)	On Bus_off_request from FCE
7.4.2.3, 8.1.3.4	bus_off_release symbol	Bus-off release control	Release node from bus-off	PCS -> PMA	aui_if.bus_off_release(std_logic)	On Bus_off_release_request from FCE
7.4.3	input symbol	Dominant/recessive symbol	Indicate physical input symbol	PMA -> PCS	aui_if.rx(std_logic)	Continuously driven by PMA

Table 8: Interface definition for fce_llc_if.

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
8.1.3.2	Normal_mode_request	Mode request	Request reset to normal mode	LLC -> FCE	fce_llc_if.normal_mode_request(boolean)	Issued on startup/restart

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
8.1.3.2	Normal_mode_response	Mode response	Acknowledge normal-mode request	FCE -> LLC	fce_llc_if.normal_mode_response (boolean)	Returned after FCE processing
8.1.3.2	Bus_off	Bus-off status	Indicate node is bus-off	FCE -> LLC	fce_llc_if.bus_off (boolean)	Asserted on bus-off transition

Table 9: Interface definition for fce_mac_if.

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
8.1.3.3	Transmit/receive	Transfer mode context	Report current TX/RX context	MAC -> FCE	fce_mac_if.transmitting (boolean)	Updated with MAC transfer context
8.1.3.3	Error	Error event	Report detected protocol error	MAC -> FCE	fce_mac_if.error (boolean)	Pulse on bit/stuff/CRC/form/ACK error
8.1.3.3	Primary_error	Primary error event	Report primary error condition	MAC -> FCE	fce_mac_if.primary_error (boolean)	Pulse on primary error condition
8.1.3.3	Error/overload flag	EF/OF state	Report EF/OF transmission state	MAC -> FCE	fce_mac_if.sending_error_flag (boolean)	Asserted during EF/OF transmission
8.1.3.3	Counters_unchanged	Counter-update qualifier	Qualify counter exception path	MAC -> FCE	fce_mac_if.counters_unchanged (boolean)	Asserted on rule-c exception cases
8.1.3.3	Error_delimiter_too_late	Late delimiter event	Report late error-delimiter condition	MAC -> FCE	fce_mac_if.error_delimiter_too (boolean)	Asserted on late delimiter condition
8.1.3.3	Successful_transfer	Transfer completion event	Report successful TX/RX completion	MAC -> FCE	fce_mac_if.successful_transfer (boolean)	Pulse on successful frame transfer

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
8.1.3.3	Error_passive_response	State response	Report entry into error-passive state	MAC -> FCE	fce_mac_if.error_passive_respon (boolean)	On state transition completion
8.1.3.3	Error_active_response	State response	Report return to error-active state	MAC -> FCE	fce_mac_if.error_active_respons (boolean)	On state transition completion
8.1.3.3	Error_passive_request	State request	Request MAC enter error-passive state	FCE -> MAC	fce_mac_if.error_passive (boolean)	On TEC/REC threshold crossing
8.1.3.3	Error_active_request	State request	Request MAC return to error-active state	FCE -> MAC	fce_mac_if.error_active (boolean)	On TEC/REC recovery

Table 10: Interface definition for fce_pcs_if.

ISO ref.	ISO symbol	ISO payload	ISO semantics	Direction	Implementation mapping	Implementation notes
8.1.3.4	Bus_off_request	Bus-off request	Request node switch-off from bus	FCE -> PCS	fce_pcs_if.bus_off_request (boolean)	On bus-off transition condition
8.1.3.4	Bus_off_release_request	Bus-off release request	Request node re-enable from bus-off	FCE -> PCS	fce_pcs_if.bus_off_release_requ (boolean)	On restart/reintegration
8.1.3.4	Bus_off_response	Bus-off response	Acknowledge bus-off request	PCS -> FCE	fce_pcs_if.bus_off_response (boolean)	Returned after bus-off action
8.1.3.4	Bus_off_release_response	Bus-off release response	Acknowledge bus-off-release request	PCS -> FCE	fce_pcs_if.bus_off_release_resp (boolean)	Returned after release action

1.3 Protocol-Driven Type System

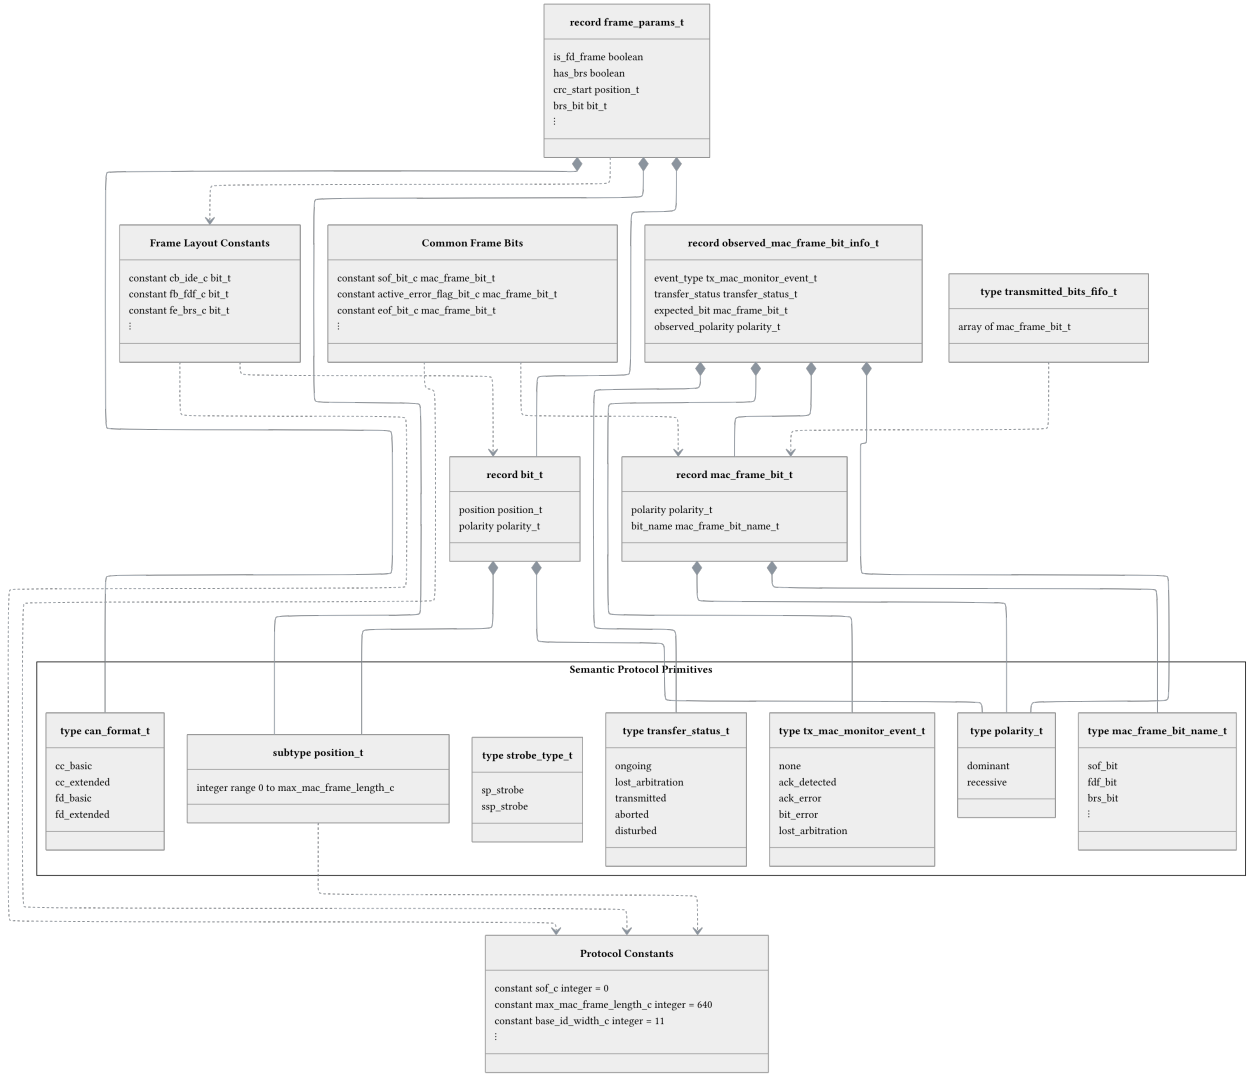


Figure 4: Type and constant hierarchy. Protocol constants derived from ISO 11898-1 form the root of the hierarchy, from which frame layout constants, type constraints, and composite record types are derived. The TX Monitoring namespace groups the types used by `get_observed_mac_frame_bit_info()` to classify bus events on each sample-point strobe and support TDC-delayed bit comparison via the transmitted-bits FIFO.

1.4 LLC Sub-layer

Responsible for frame buffering and retransmission management. It provides an Avalon-ST interface to the user application and communicates with the FCE to handle retransmission limits and error status reporting.

1.4.1 can_llc_tx

1.4.2 can_llc_rx

1.5 MAC Sub-layer

The core of the protocol logic. It handles bit serialization, CRC calculation, and bit stuffing. It coordinates the overall frame state machine and interacts closely with the Fault Confinement Entity (FCE) to manage error counters (TEC/REC) and node state (Error Active/Passive/Bus Off) based on protocol violations.

1.5.1 can_mac_tx

The MAC TX layer (Figure 5) is composed of four main components:

1. **tx_mac_ser** (Serializer): Converts LLC bytes into a serial bit stream with polarity information
2. **tx_mac_fsm** (Frame State Machine): Coordinates frame transmission, controls all submodules
3. **bit_stuffer_fd** (Bit Stuffer): Implements CAN/CAN-FD bit stuffing rules
4. **crc_fd** (CRC Engine): Generates CRC-15/CRC-17/CRC-21 based on frame type

The `transmitting_frame` state is the most complex. On entry, `initialize_frame_transmission()` resets the Serializer (`can_mac_ser_tx`), the Bit Stuffer (`can_mac_bs_tx`, MAC Sub-layer, ISO ref.: 8.5), and the CRC engine (`can_mac_crc_tx`, MAC Sub-layer, ISO ref.: 8.5.4). Each sample-point strobe from the PCS Sub-layer (ISO ref.: 7.2-7.4) then drives the following sequence:

1. `get_observed_mac_frame_bit_info()` reads the bus polarity at the sample point and compares it against the transmitted bit, returning an event record with mismatch and stuff-bit flags.
2. If an SSP error was latched from the previous bit period (CAN-FD data phase TDC, PCS Sub-layer, ISO ref.: 7.3.4), that error is processed before the current event.
3. Based on the event, either `transmit_stuff_bit()` or `transmit_normal_bit()` drives the next bit and updates the CRC and stuff-bit counter.
4. A detected error or polarity mismatch triggers a transition to `transmitting_active_error_flag` or `transmitting_passive_error_flag` depending on the fault confinement state reported by the FCE (Fault Confinement Entity, ISO ref.: 8.1.3-8.1.4).

1.5.2 can_mac_rx

1.6 PCS Sub-layer

Handles bit timing and synchronization. It generates the sample point (SP) and secondary sample point (SSP) strobes. It provides bit-level monitoring data to the FCE to detect synchronization and timing errors.

1.6.1 can_pcs_tx

1.6.2 can_pcs_rx

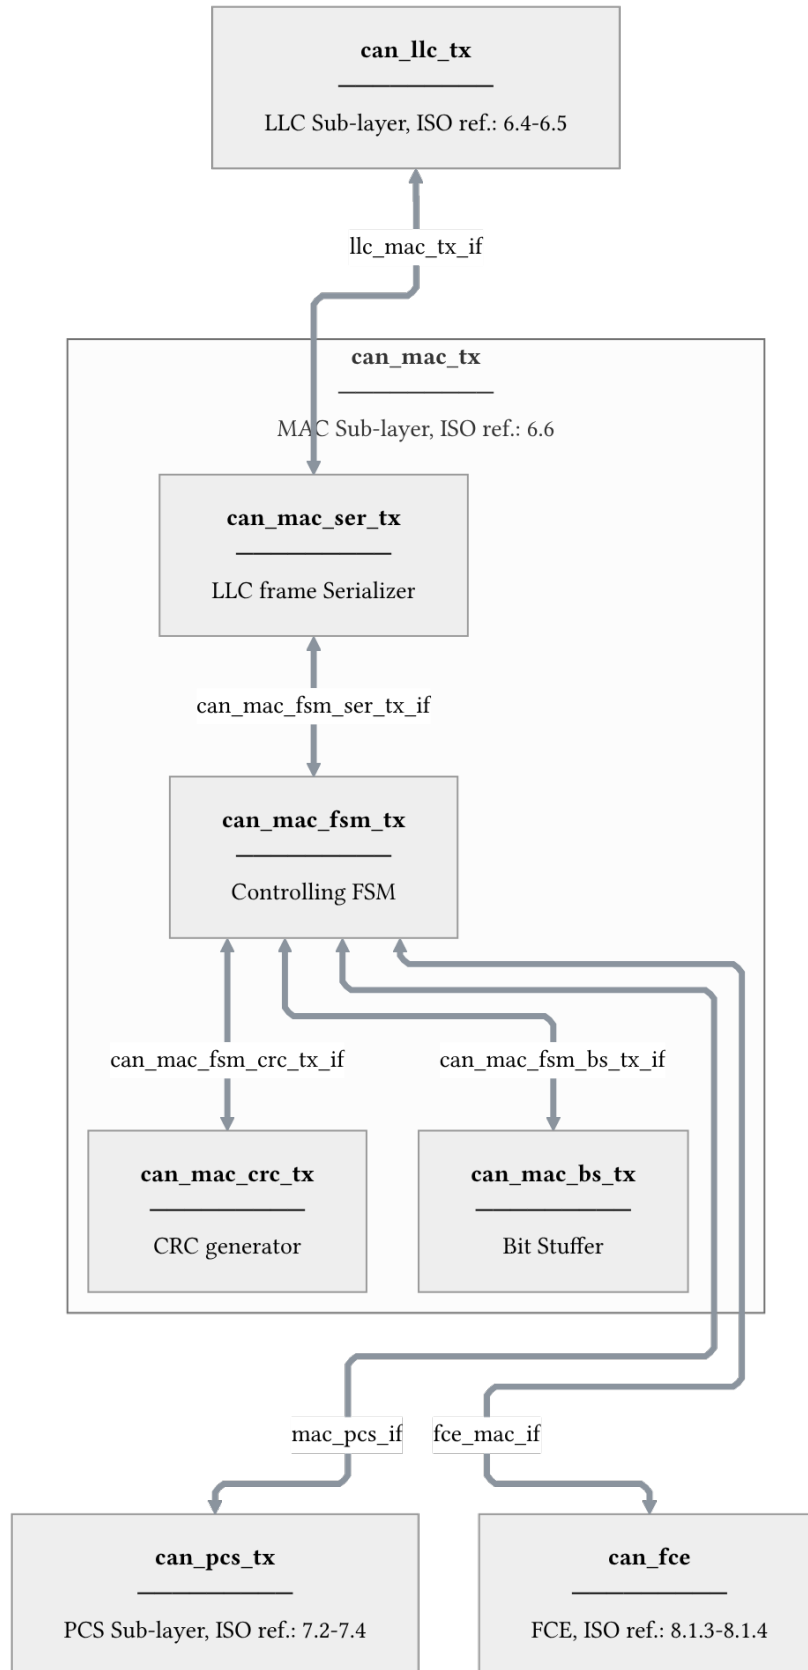


Figure 5: MAC TX layer architecture showing internal component interconnections and external interfaces (LLC, PCS, FCE).

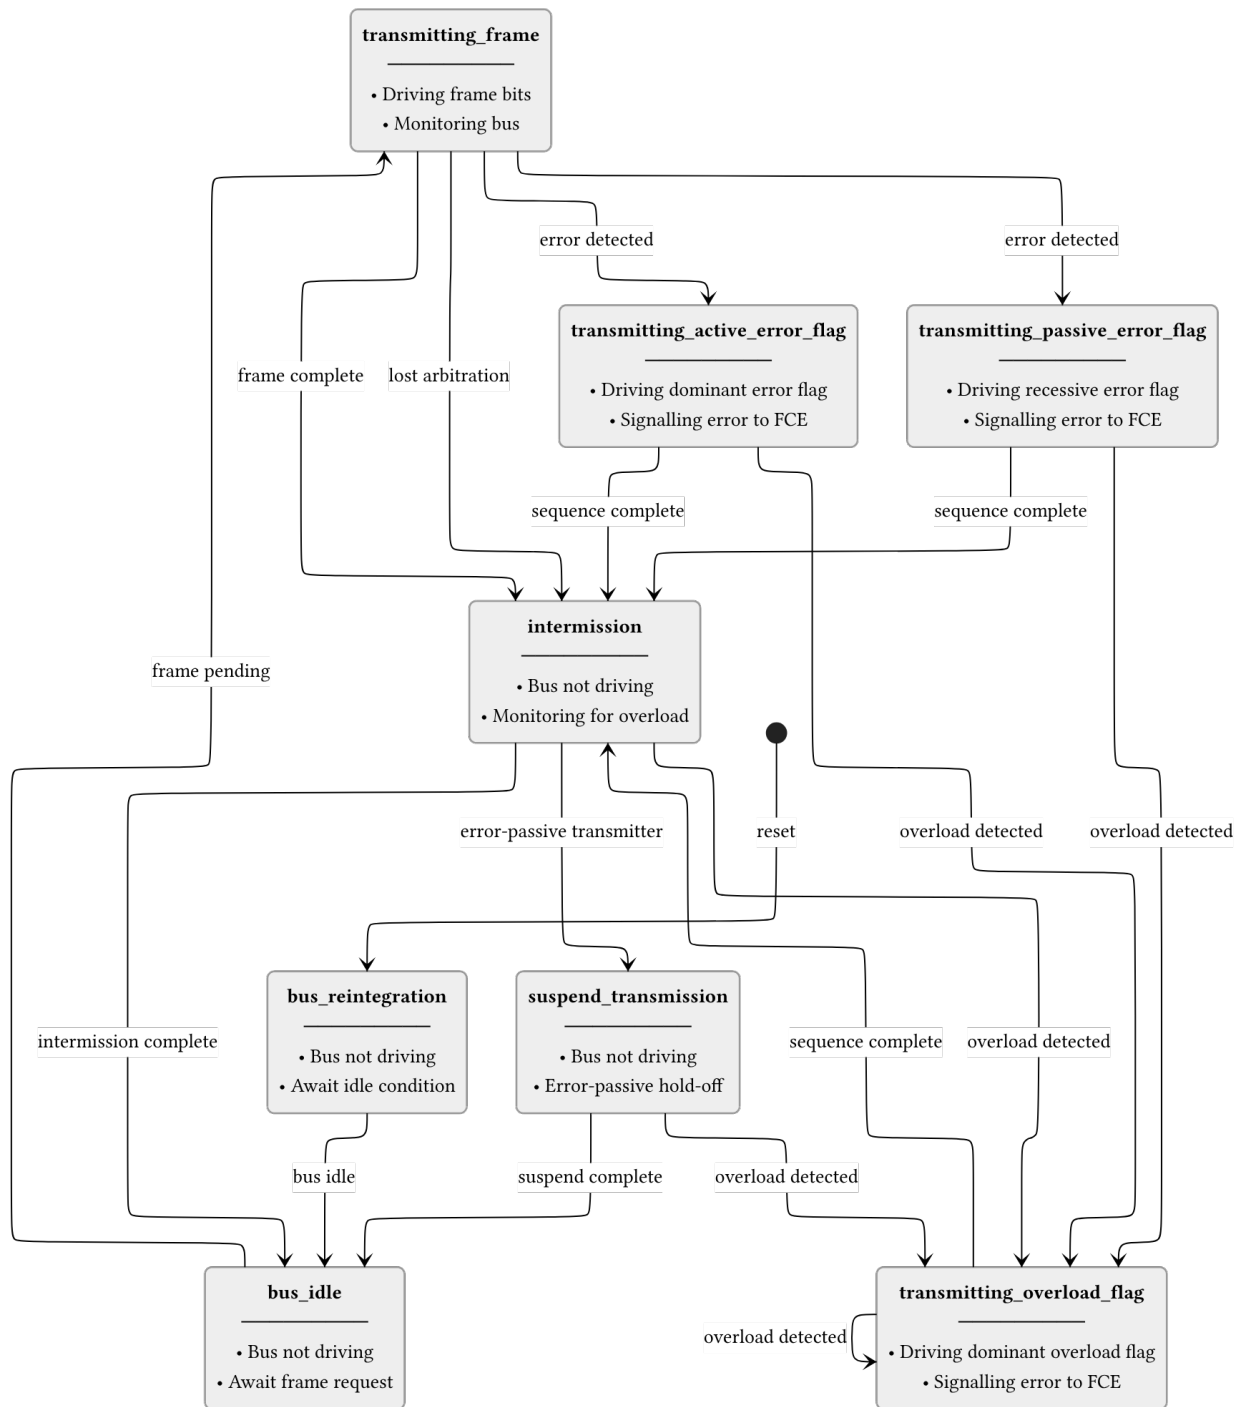


Figure 6: MAC TX FSM state transitions. Error-active and error-passive paths share the same flag+delimiter sequence but drive different polarities. Overload transitions (dominant in intermission bits 0-1, or dominant on last delimiter bit) are omitted for clarity.

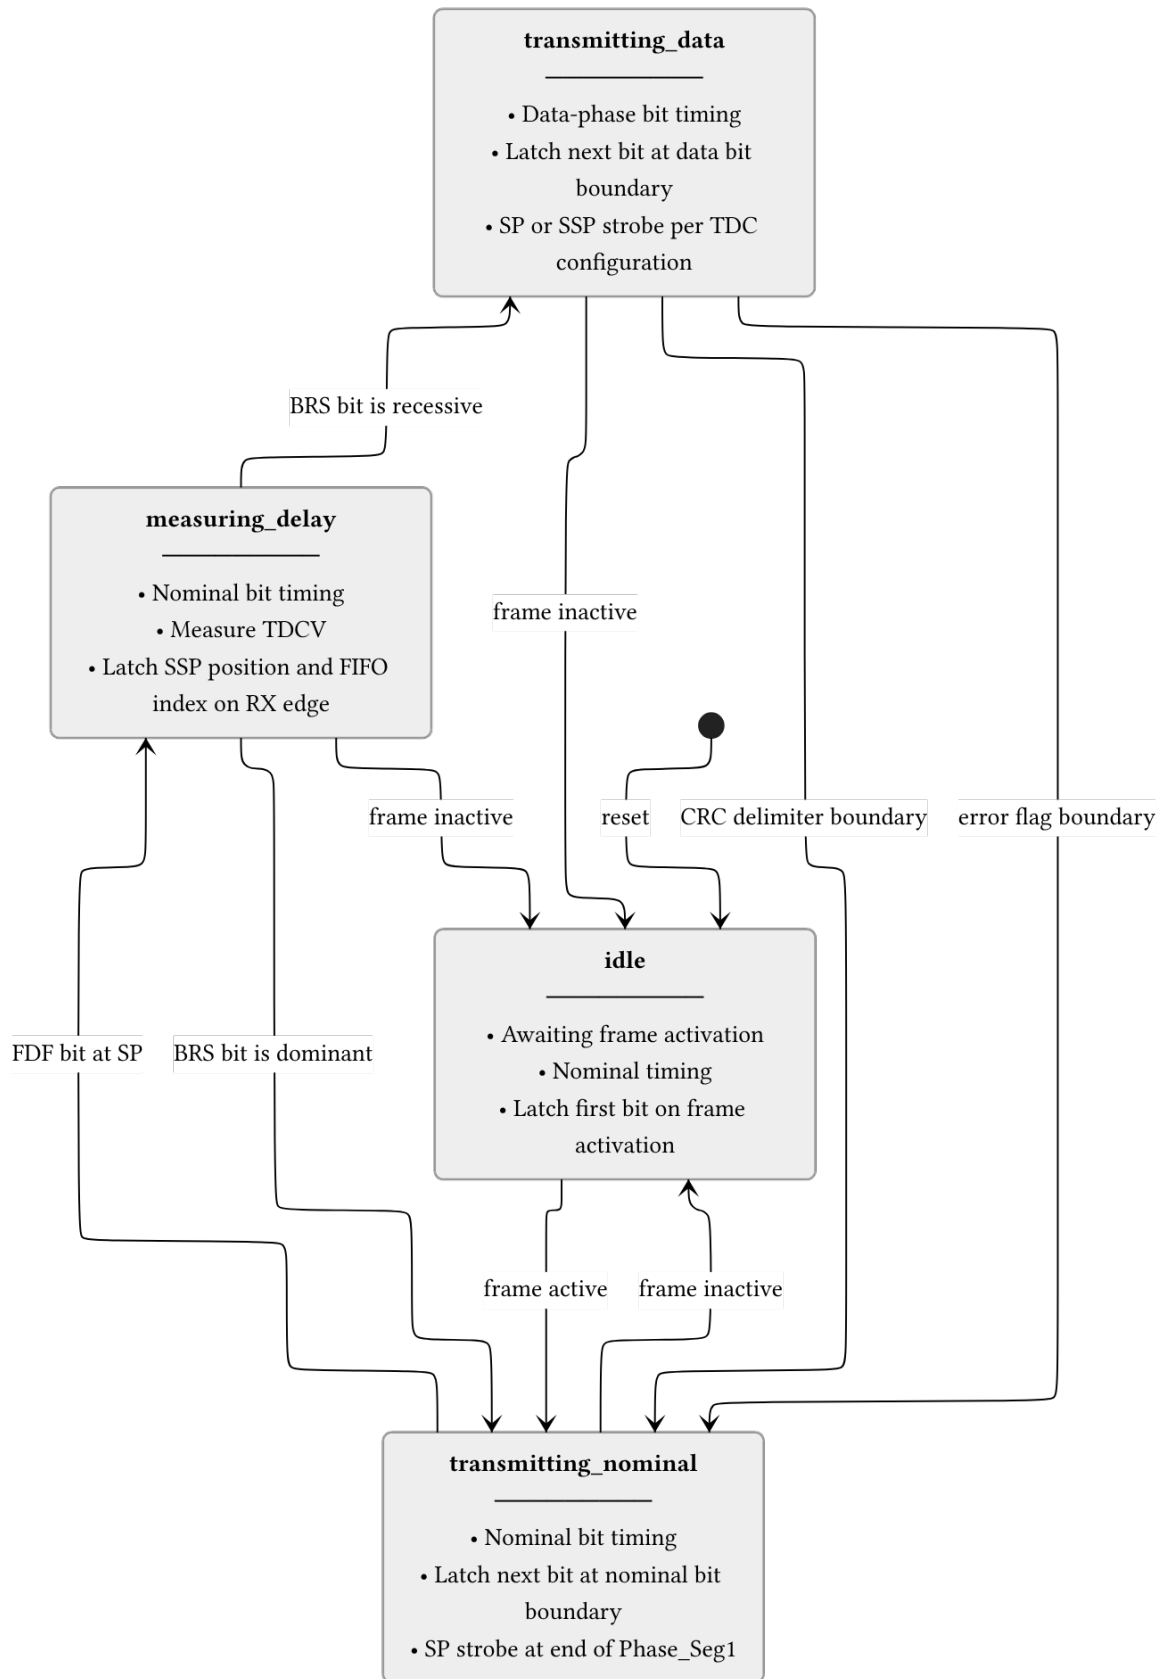


Figure 7: PCS TX FSM state transitions. The measuring_delay state is entered on the FDF sample point to measure TDCV (Transmitter Delay Compensation Value, ISO ref.: 7.3.4). The BRS bit boundary determines whether data-phase timing is used. All non-idle states return to idle when the frame becomes inactive.