



- (1) make sure no power flows backwards to the LEDs when just the programmer is connected.
- (2) We don't want any power bleeding through input clamping diodes when just the programmer is connected and the main power supply is off.
- (3) micro-Match 2x2, 2.54mm / 1.27mm, female, SMD, main-board (AMP PN: 188275-4)
- (4) micro-Match 2x2, 2.54mm / 1.27mm, male, TH, daughter-board (AMP PN: 215464-4)

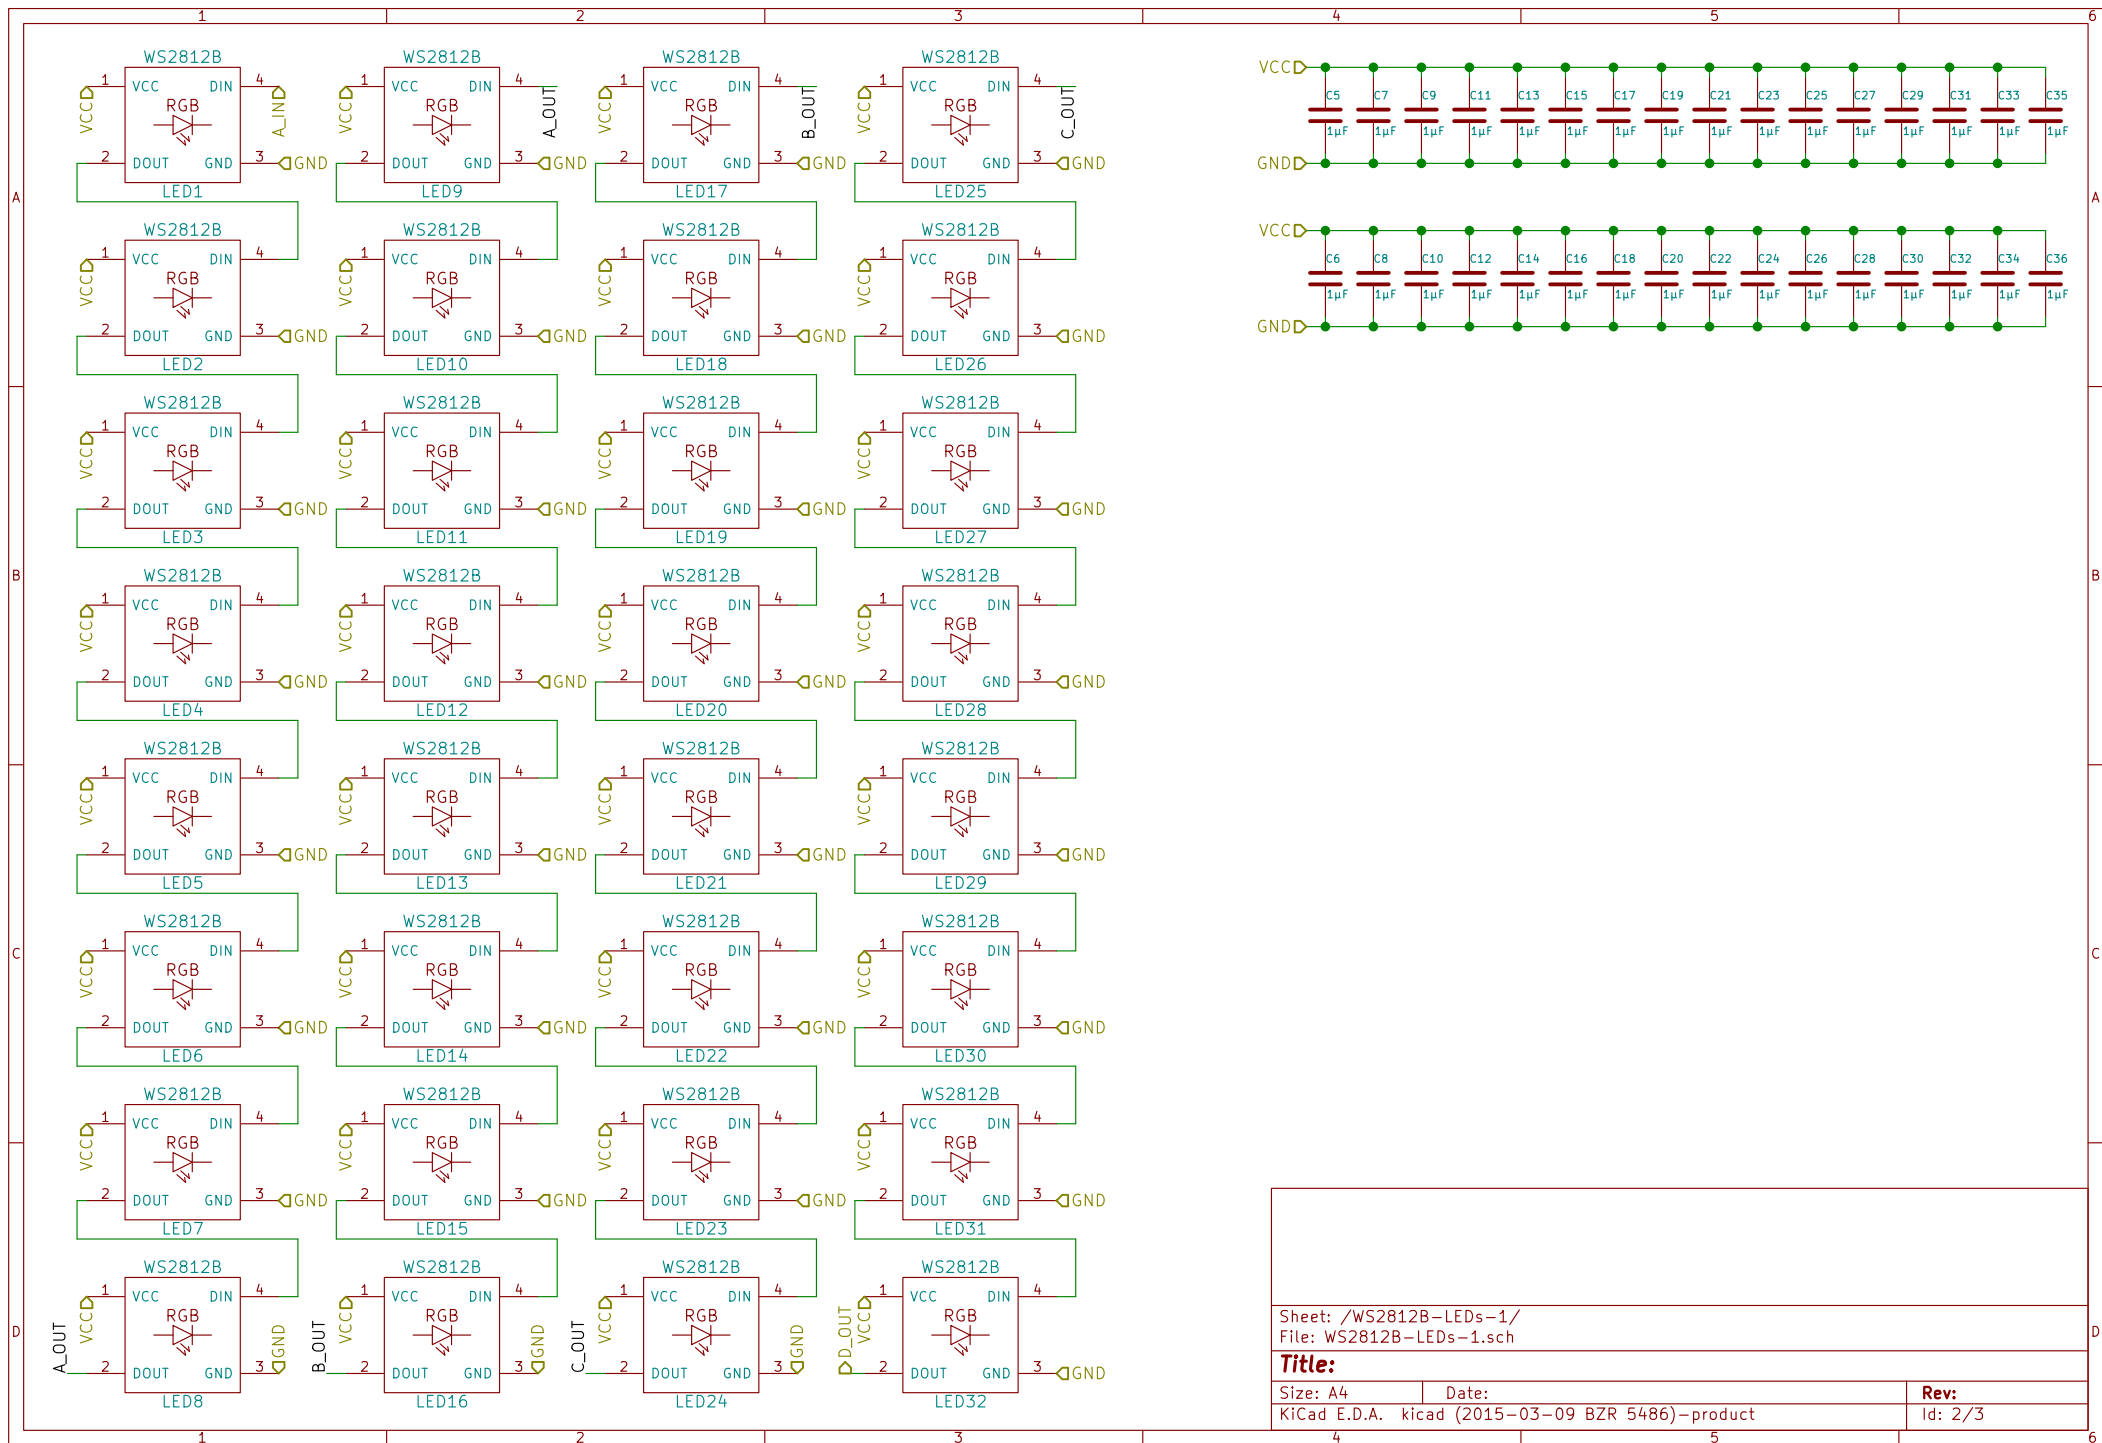

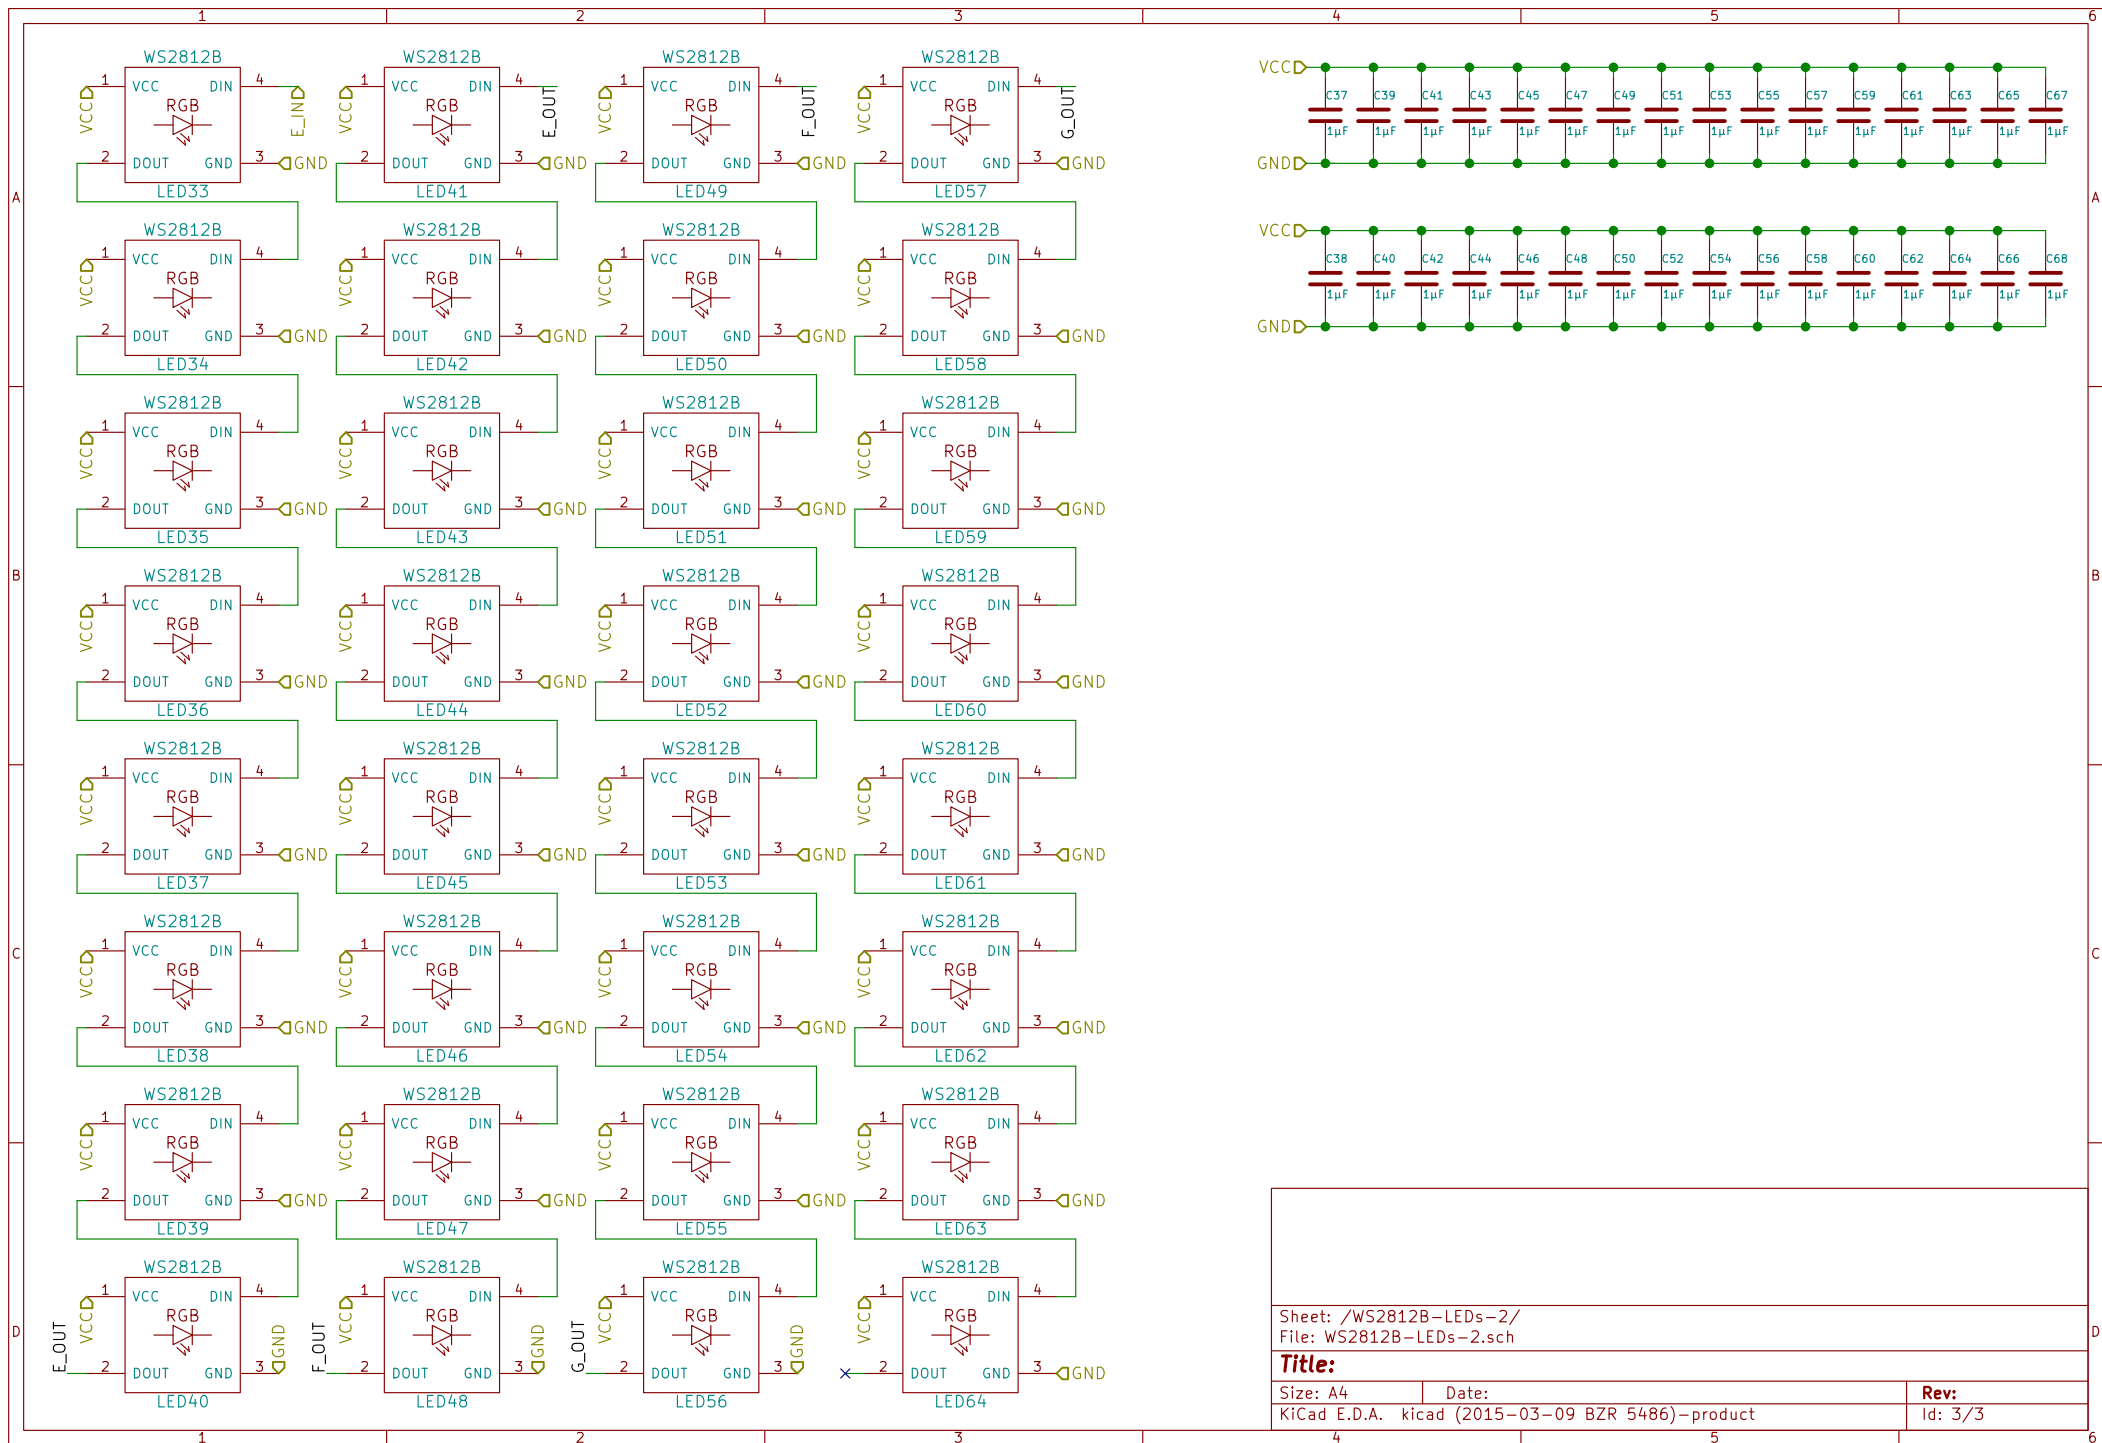

Sheet: /WS2812B-LEDs-2/
File: WS2812B-LEDs-2.sch

Title:

Size: A4
KiCad E.D.A. kicad (2015-03-09 BZR 5486)-product

Date:

Rev:
Id: 3/3