

- (1) make sure no power flows backwards to the LEDs when just the programmer is connected.
- (2) We don't want any power bleeding through input clamping diodes when just the programmer is connected and the main power supply if off.
- (3) micro-Match 2x2, 2.54mm / 1.27mm, female, SMD, main-board (AMP PN: 188275-4)
- (4) micro-Match 2x2, 2.54mm / 1.27mm, male, TH, daughter-board (AMP PN: 215464-4)


2014 - blog.spitzenpfeil.org

Sheet: /
File: IKEA-Samtid_mood-light.sch

Title: IKEA-Samtid_mood-light

Size: A4 Date: 24 Jul 2014
KiCad E.D.A. kicad (2014-06-29 BZR 4957)-product

Rev: 0.21
Id: 1/3

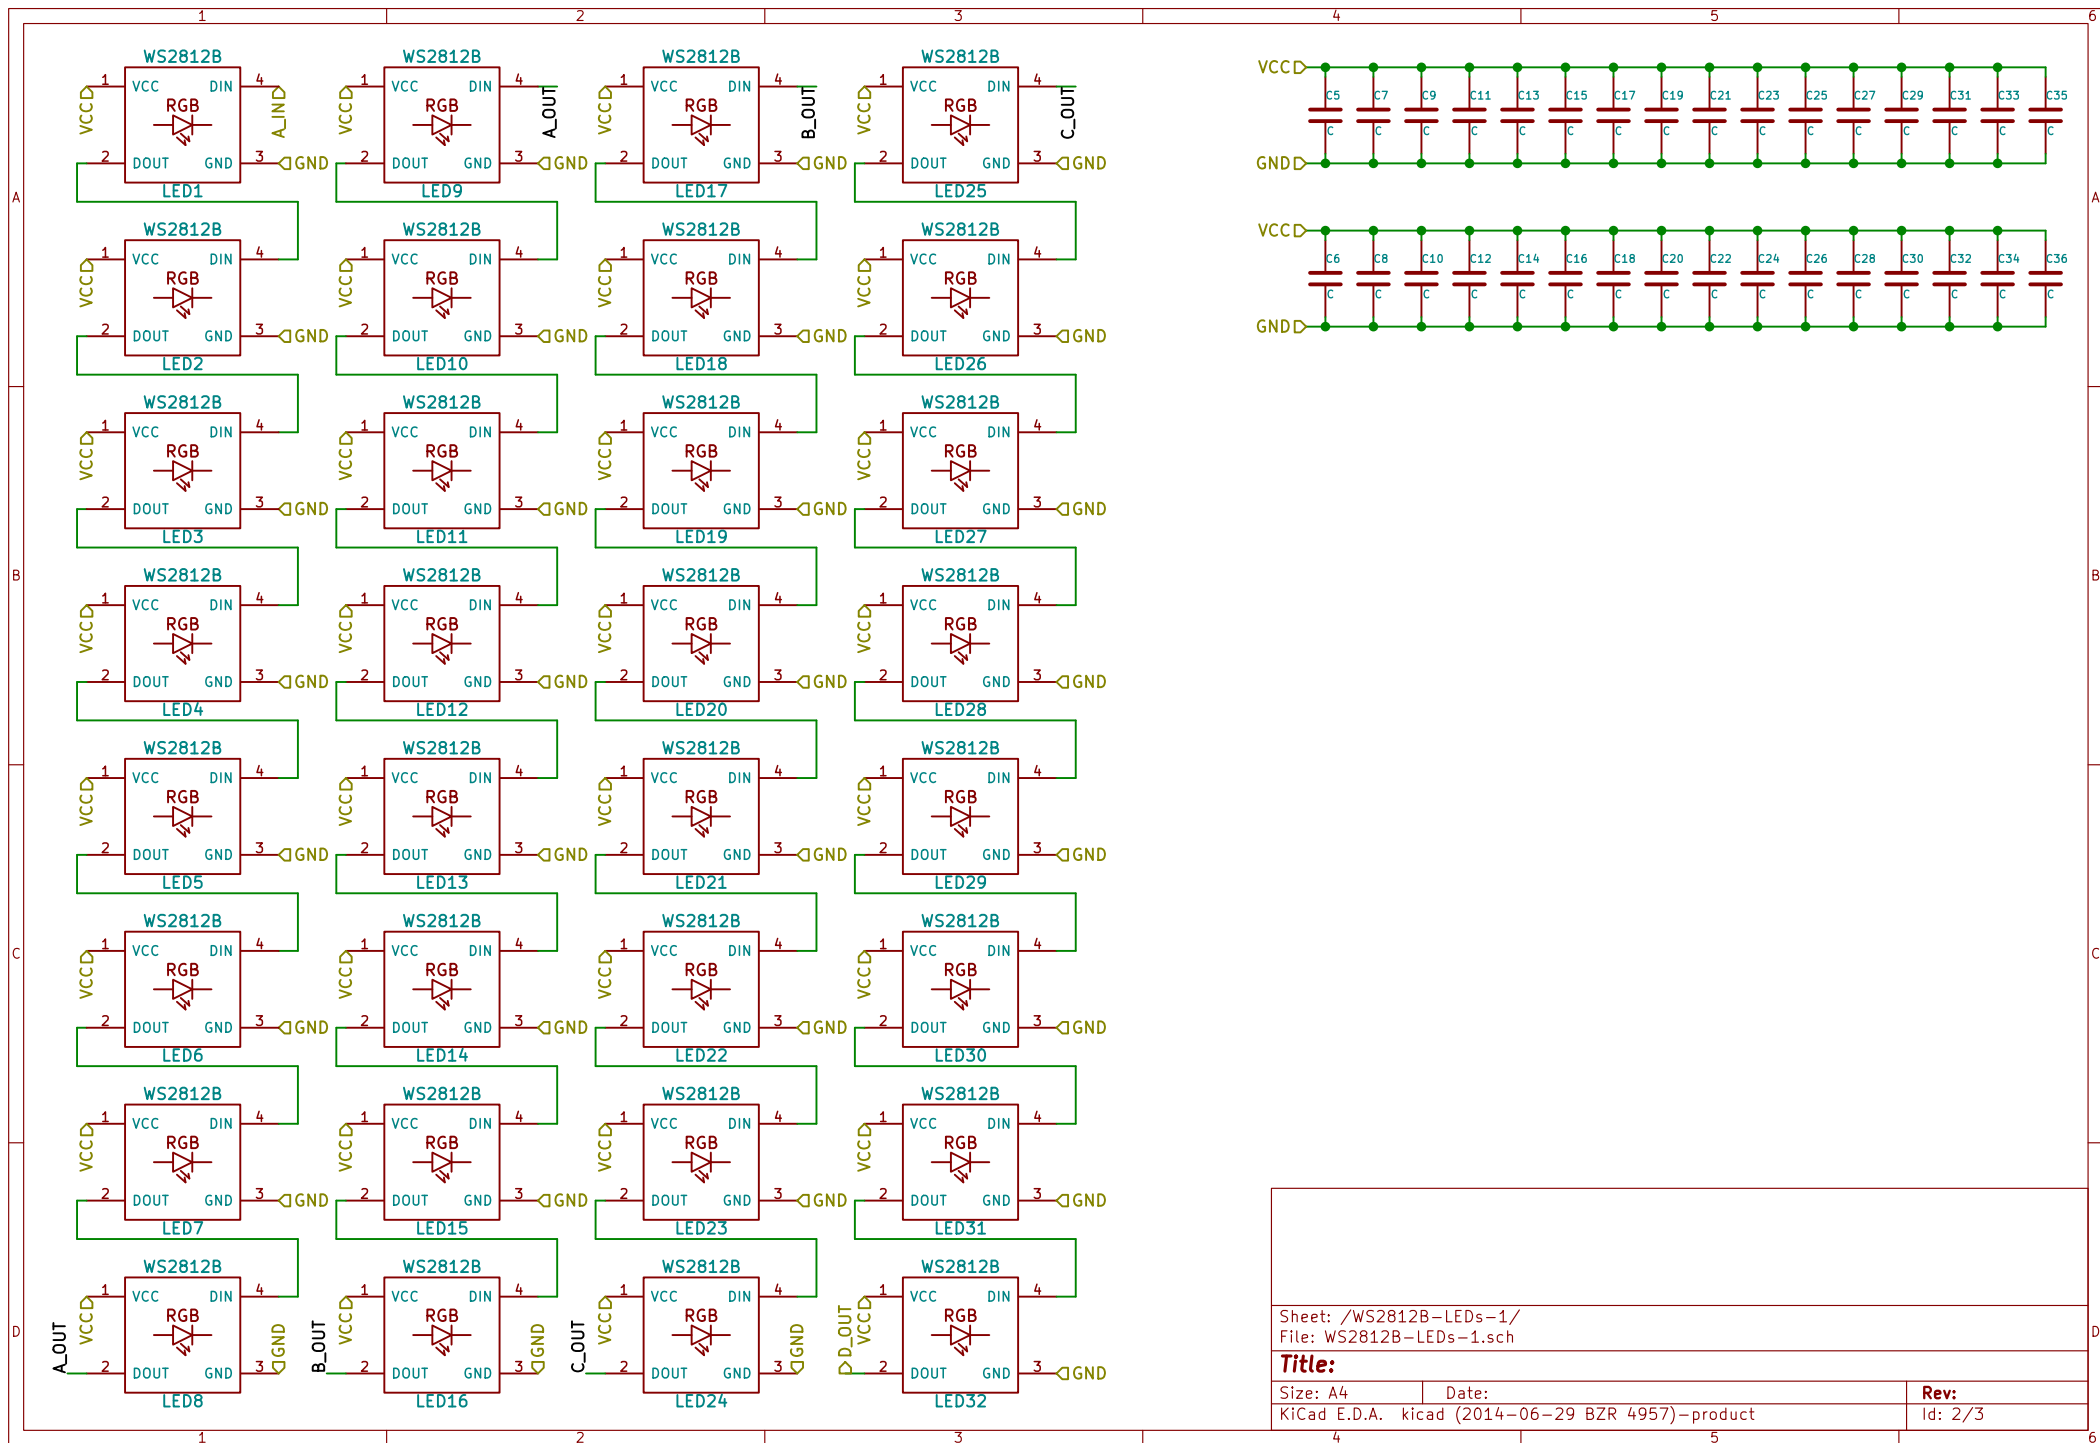

Sheet: /WS2812B-LEDs-1/
File: WS2812B-LEDs-1.sch

Title:

Size: A4
KiCad E.D.A. kicad (2014-06-29 BZR 4957)-product

Date:

Rev:
Id: 2/3

