




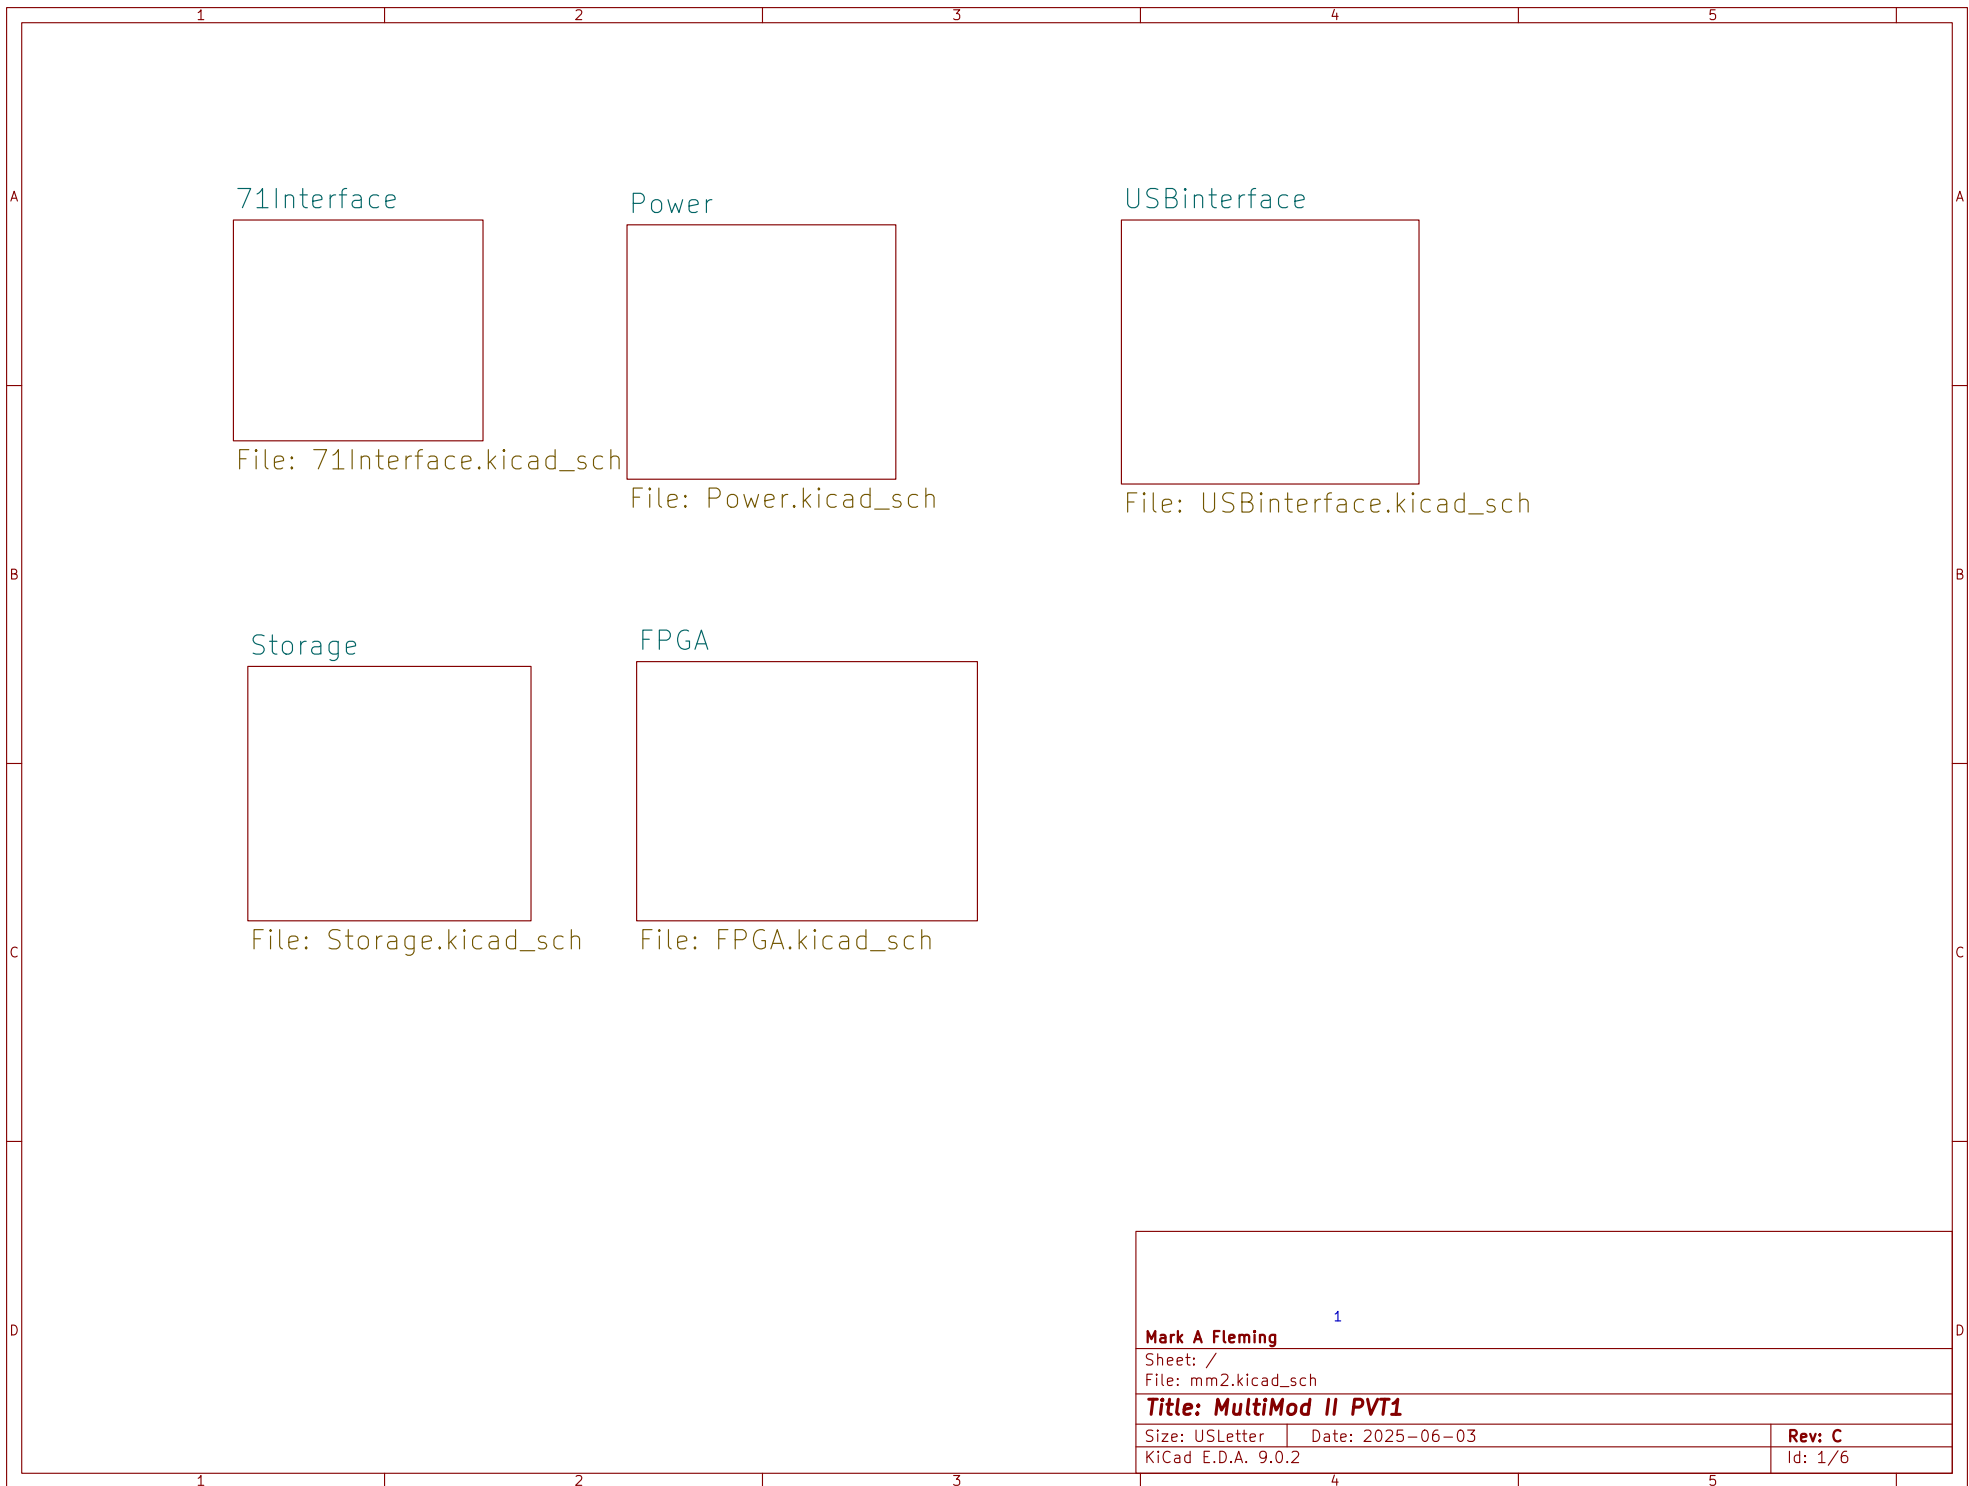

3V < Vdd < 18V, Vcc can exceed Vdd

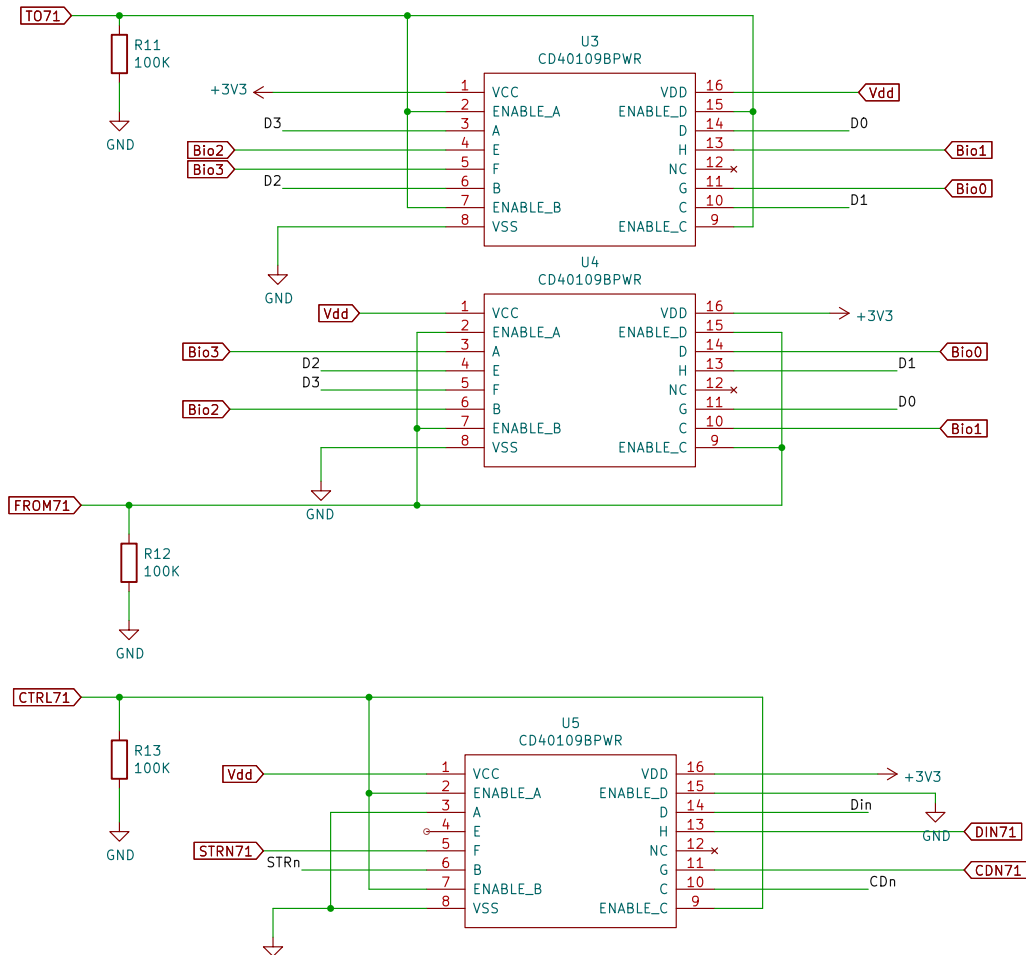

A custom PCB footprint is needed with proper hole size and spacing



Pulldowns protect 71B interface during FPGA initialization

HP-71B Interface

Mark A Fleming

Sheet: /71Interface/

File: 71Interface.kicad_sch

Title: MultiMod II PVT1

Size: USLetter Date: 2024-10-13




KiCad E.D.A. 9.0.2

Rev: C

Id: 2/6

Note: TI TPS79901 series have
2.7V to 6.5V input range, 7V abs. max

Power Supply Sequencing
1) 1.2V FPGA core voltage
2) 3.3V External I/O
3) 2.5V External I/O

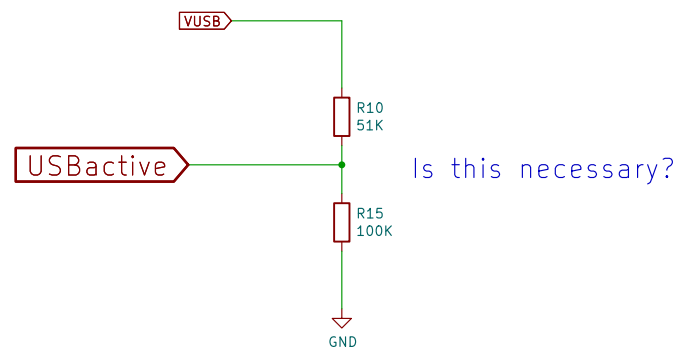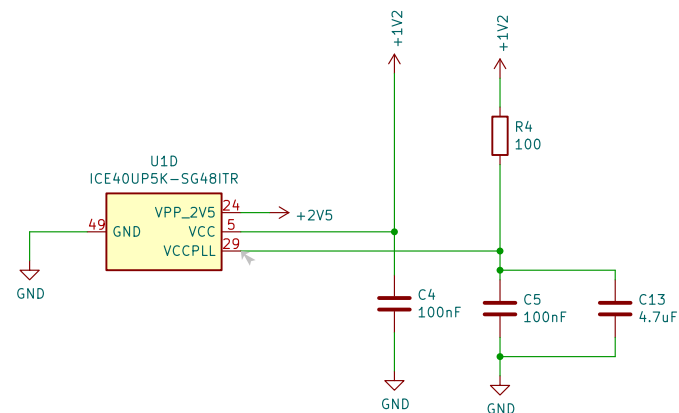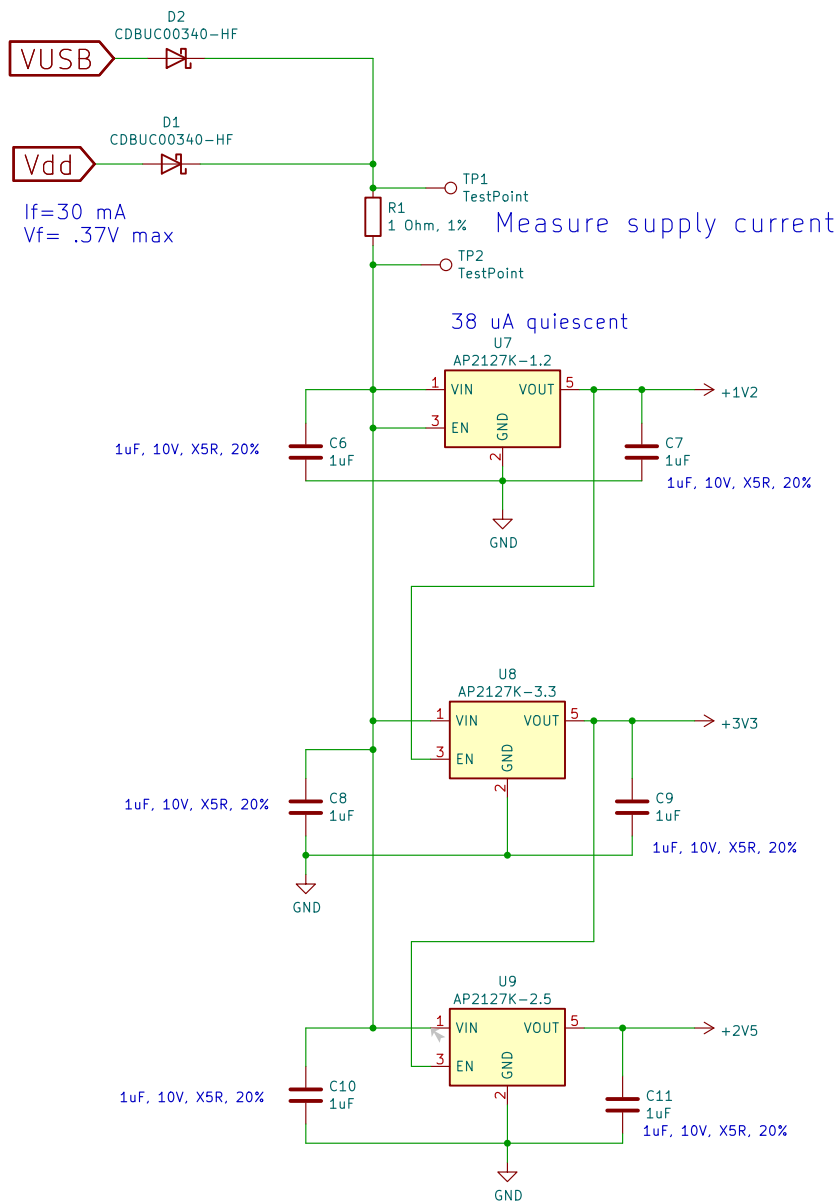

Power Supply
Mark A Fleming

Sheet: /Power/
File: Power.kicad_sch


Title: MultiMod II PVT1


Size: USLetter Date: 2024-10-13

KiCad E.D.A. 9.0.2

Rev: C

Id: 4/6

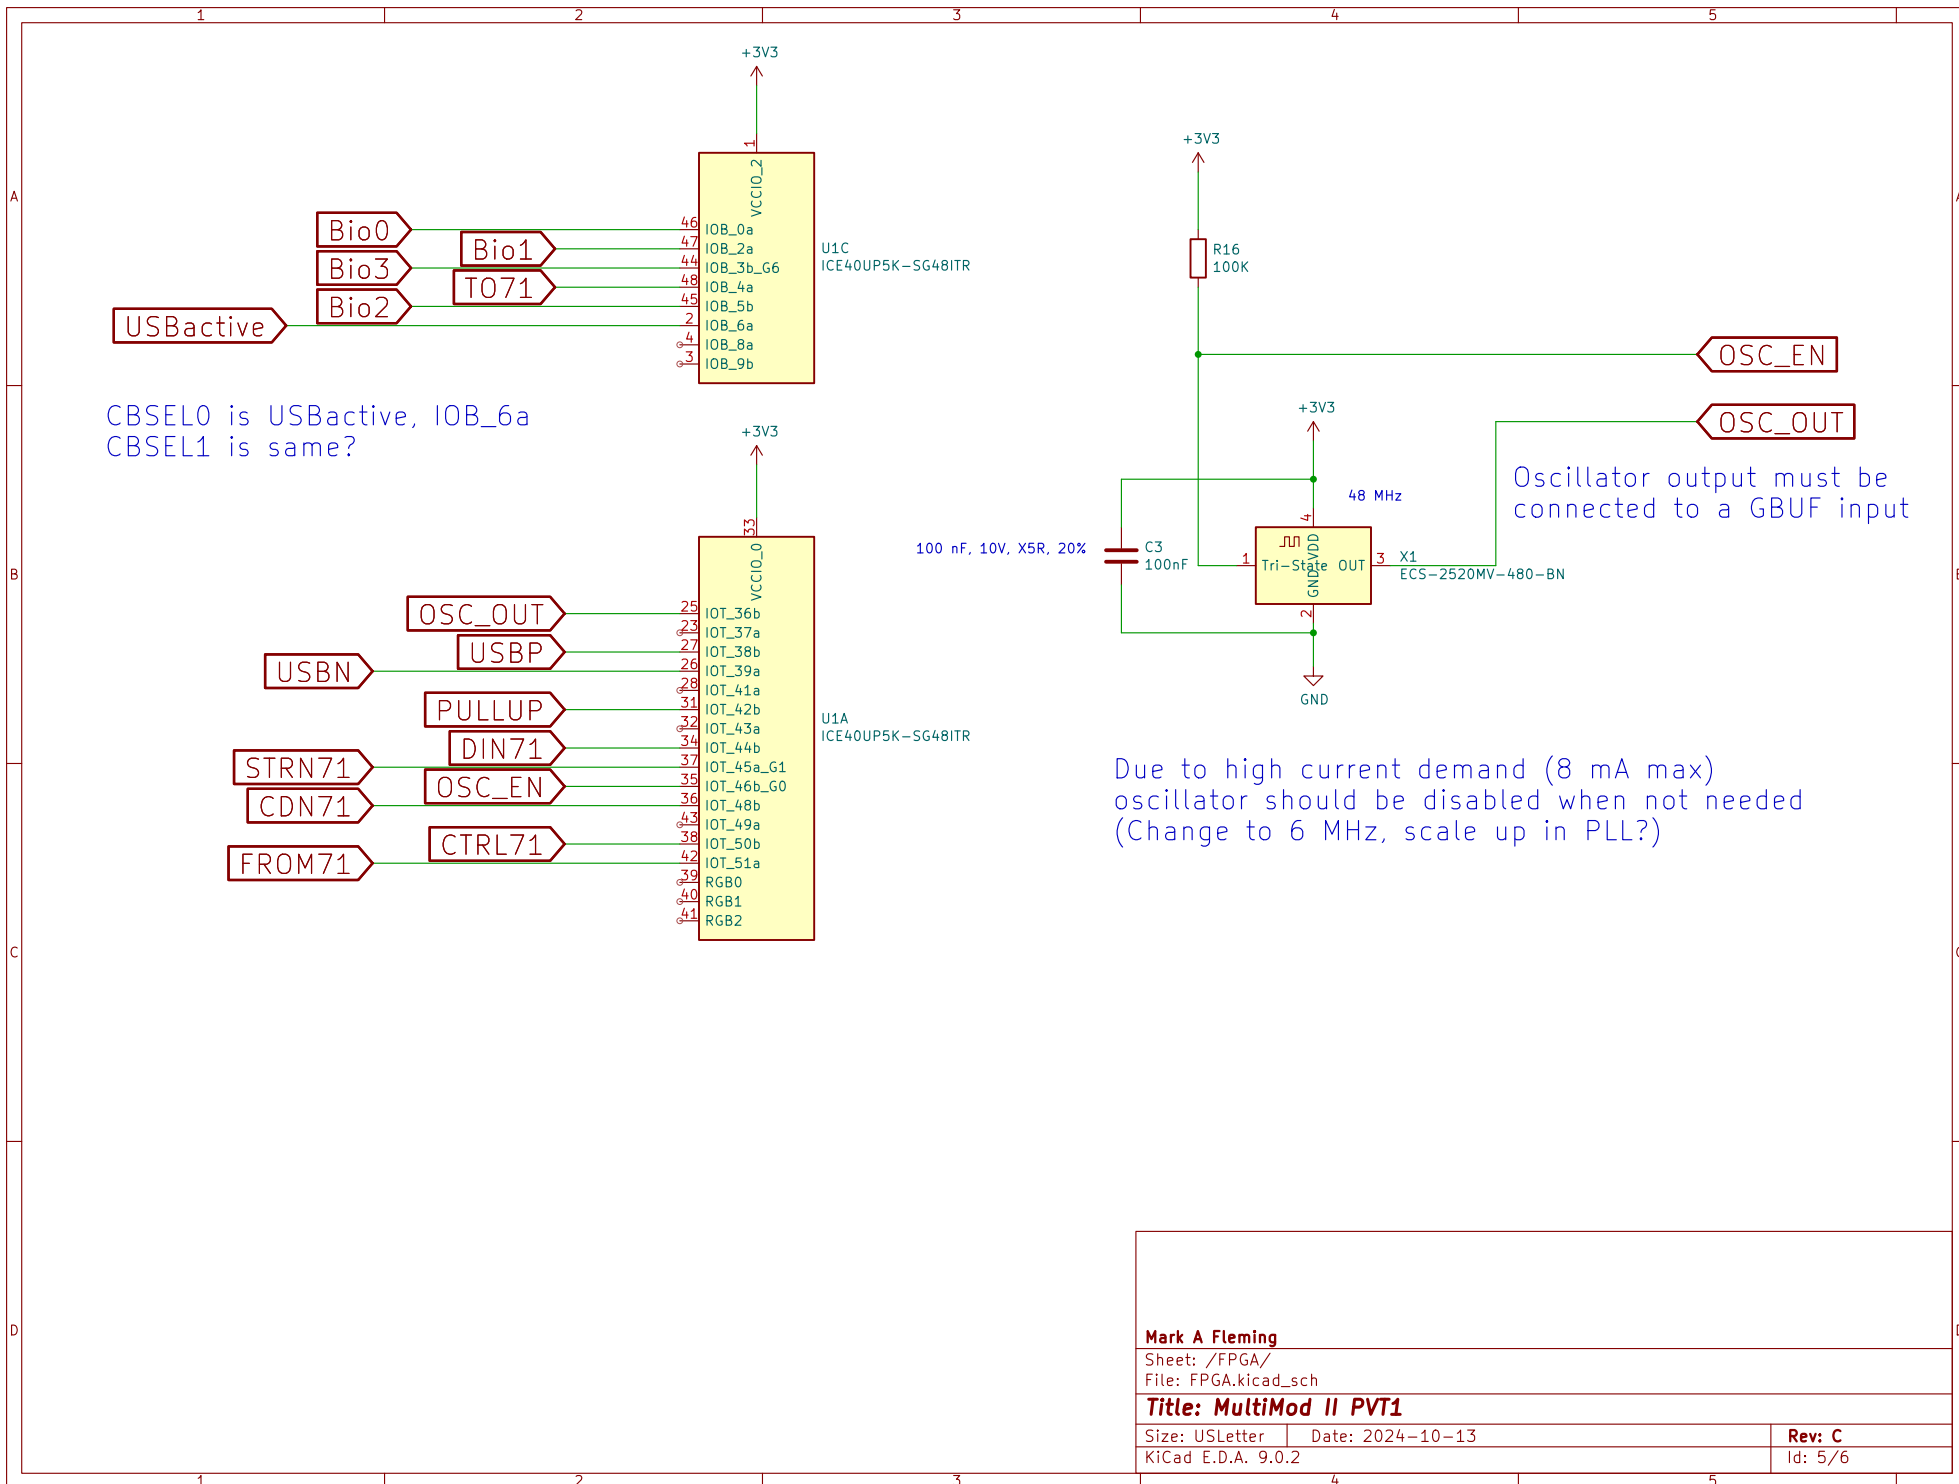

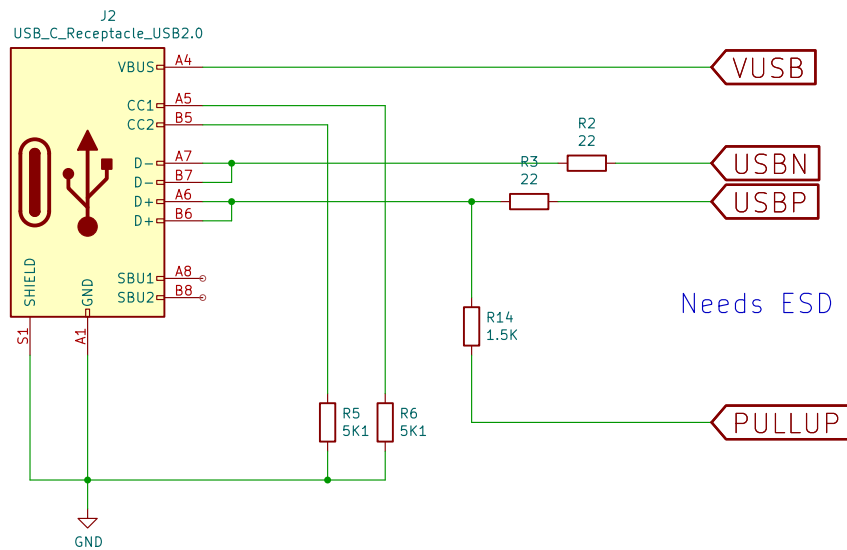

Needs ESD protection for data lines

USB Interface

Mark A Fleming

Sheet: /USBInterface/

File: USBInterface.kicad_sch

Title: MultiMod II PVT1

Size: USLetter Date: 2024-10-13

KiCad E.D.A. 9.0.2

Rev: C

Id: 6/6