OriginMind™-INTEGRATED SOLUTION

INTELLIGENT MOBILE ROBOT + VOICE INTERACTION

A practical starting point for university labs, enterprise demonstrations, local system integrators and pilot projects.



Reference mobile robot configuration shown

CORE PACKAGE REFERENCE PRICE

USD 5,000 PER SET

CORE PACKAGE - TWO COMPONENTS

Wheeled Mobile Robot

+ OriginMind™ Voice Dialogue System

Sensing, autonomy and services are configured separately.

PRODUCT OVERVIEW

Talk to the robot. Connect speech to action.

OriginMind™ combines a wheeled mobile platform with a voice dialogue layer for natural-language demonstrations and configurable robot workflows.

OriginMind™ SOFTWARE LAYER

Users can give spoken instructions, trigger supported robot skills and receive status or conversational feedback through one interaction layer.



Interaction workflow

01 **SAY**
Give a natural-language instruction

02 **UNDERSTAND**
Interpret intent within supported functions

03 **PLAN**
Select an available route or robot skill

04 **EXECUTE**
Navigate, observe or perform a configured task

05 **RESPOND**
Return status or conversational feedback

One platform. Three practical entry points.

UNIVERSITIES & LABS

Teaching, research, student projects and robotics demonstrations.

LOWER ENTRY BARRIER

INTEGRATION PARTNERS

Build localized applications, integrations and customer pilots.

LOCAL INTEGRATION

ENTERPRISE TEAMS


Validate service, inspection and visitor interaction workflows.

PILOT VALIDATION

CONFIGURABLE CAPABILITIES

Build the capability set for each pilot

Natural-language interaction is included in the core package. Sensing, navigation and inspection modules are configured to the application.



01 Large-area 3D mapping

Constructs detailed maps for mobile operation in larger indoor or structured environments.




02 Multi-sensor localization

Supports positioning and autonomous patrol with selected perception inputs.



03 Autonomous obstacle avoidance

Detects and responds to obstacles during supported navigation tasks.




04 Semantic navigation

Links 3D data and RGB imagery with semantic perception and route planning.



05 Multimodal inspection

Supports RGB and thermal sensing for configurable inspection workflows.

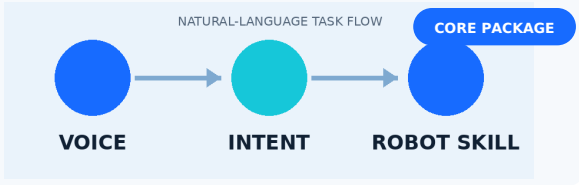

06 Natural-language interaction

Maps spoken intent to supported robot actions and task feedback.

PACKAGE SCOPE

The USD 5,000 core package includes the wheeled platform and OriginMind™ voice dialogue system. Optional sensing, navigation and inspection modules are configured separately.

CORE PACKAGE AND DEPLOYMENT

Start with the USD 5,000 Core Package

Begin with mobility and voice interaction, then configure sensors, autonomy, localization and services for the target use case.

CORE PACKAGE REFERENCE PRICE

USD 5,000

per set

Core package

- **1 x wheeled mobile robot platform**
- **1 x OriginMind™ voice dialogue system**

Final hardware, software and support scope is confirmed for each order.

A simple path to local deployment

1. **DEMONSTRATE**
   Show mobility and voice interaction
2. **PRIORITIZE**
   Select one clear customer workflow
3. **LOCALIZE**
   Confirm language, sensors and interfaces
4. **VALIDATE**
   Run a scoped local pilot before expansion

Suggested applications

EDUCATION

Robotics teaching and student projects

RESEARCH

Navigation, perception and HRI experiments

DEMONSTRATION

Campus, lab and innovation center demos

ENTERPRISE PILOT

Scoped service or inspection validation

OPTIONS CONFIGURED TO PROJECT NEEDS

Sensor modules, autonomous navigation, RGB/thermal inspection, accessories, audio hardware configuration, cloud services, language localization, SDK/API access, freight, import duties, installation, training, warranty and technical support.

REFERENCE CONFIGURATION

Reference hardware specifications

Specifications below describe the reference hardware configuration shown in this brochure. Final included specifications are confirmed for each order.

MOBILE PLATFORM

DIMENSIONS	730 x 460 x 860 mm
BATTERY RUNTIME	> 4 h
TURNING RADIUS	In-place rotation
MAXIMUM SPEED	1.5 m/s
PAYLOAD	10 kg

REFERENCE SENSOR COMPONENTS

LIDAR DISTANCE ACCURACY	2 cm
LIDAR ANGULAR ACCURACY	< 0.05°
MAXIMUM FRAME RATE	210 fps
CAMERA EXPOSURE	65 µs to 10 s
CAMERA DYNAMIC RANGE	59.6 dB

Capability modules shown in the reference system

1. Large-area 3D map construction
2. Fused localization and autonomous patrol
3. Autonomous obstacle avoidance
4. Semantic segmentation and semantic mapping
5. Natural-language route planning and interaction
6. RGB and thermal multimodal detection (configuration dependent)

IMPORTANT PRODUCT NOTE

OriginMind™ integrates the mobile platform with its voice and robot intelligence software. Hardware, language package, optional sensors and support scope are configured for each project. Product images are for reference; final appearance and branding may vary.

DISCUSS A PILOT OR DISTRIBUTION PARTNERSHIP

omindos.ai