EXPERIMENT - 10

Internetworking with router in cisco Packet Tracer simulator.

Aim:

To design and configure a sample internetwork using a router and establish communication blw two diff network.

Requirement:


cisco Packet Tracer.

1. Router
2. PCs.

Copper straight through cable.

Ip configuration.

Device	Ip address	subnet mask	Gateway
Router Fa0/0	192.168.10.1	255.255.255.0	-
Router Fa0/1	192.168.20.1	255.255.255.0	-
PC0	192.168.10.2	255.255.255.0	192.168.10.1
PC1	192.168.20.2	255.255.255.0	192.168.20.1

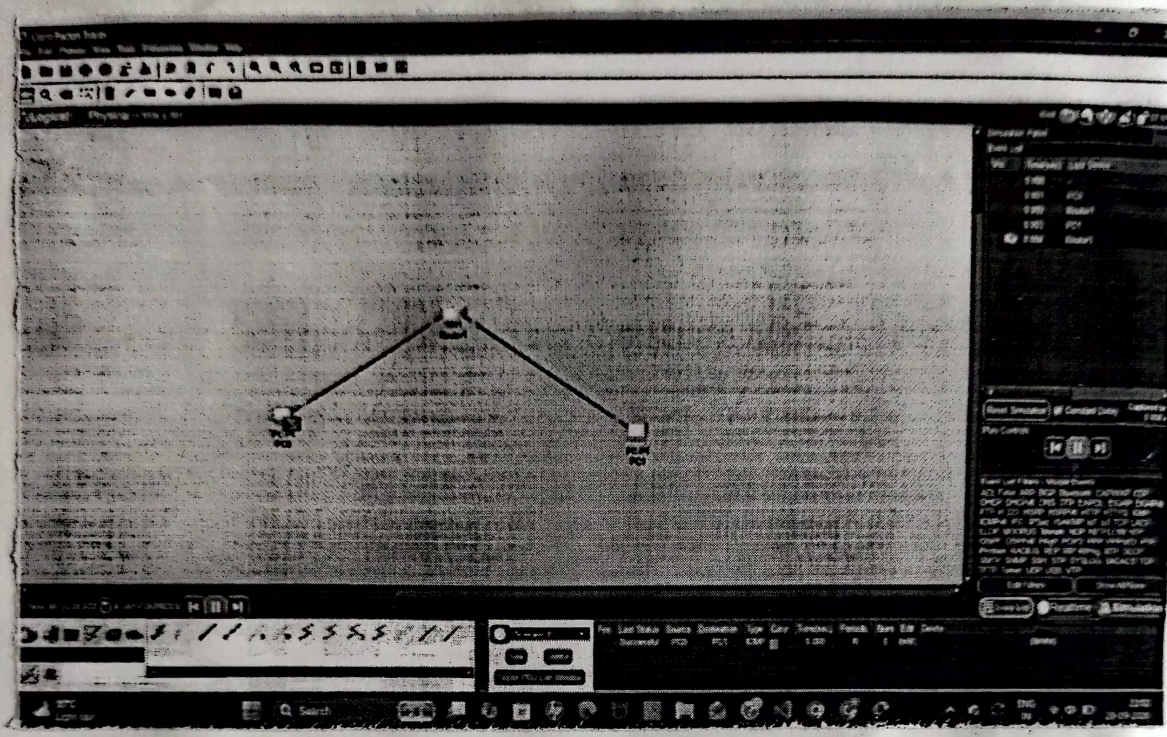

Procedure:

1) Open Cisco packet Tracer.

2) Place one router & two PCs in workspace.

3) Connect PC0 to Router 1 FastEthernet 0/0 using Copper straight through cable.

4) Connect PC1 to Router 1 FastEthernet 0/1 using Copper straight through cable.

6) Configure PC0:

IP: 192.168.10.2

Subnet mask: 255.255.255.0

Default Gateway: 192.168.20.1

7) Open Command Prompt PC0 & type.

Ping 192.168.20.2

8) Observe the reply packet

9) Send a simple PDU from PC0 to PC1 and observe the Packet transmission.

RESULT:

Thus the internetwork was successfully designed and configured using a router in Cisco packet Tracer.