THRU-HOLE Tuning Fork

Model: NC15LF/NC26LF/NC38LF **RoHS Compliant** **Rev. 2/21/2006**

http://www.foxonline.com/need_a_sample.htm

Need a Sample

FEATURES

- Miniature Packages
- Low Cost
- Cold Weld Design
- Long Term Stability
- Tight Tolerance

Learn more about:
Part Marking Identification
Tape and Reel Specification
Internet required

• PART NUMBER SELECTION

Learn More - Internet Required

Part Number	Model Number	Frequency Stability	Operating Temperature	Frequency
298LF-Frequency-xxxxx	NC15LF	-0.04 PPM / (Δ°C)²	-20 °C~ +60 °C	32.768 kHz
299LF-Frequency-xxxxx	NC26LF	-0.04 PPM / (Δ°C)²	-20 °C~ +60 °C	32.768 kHz
300LF-Frequency-xxxxx	NC38LF	-0.04 PPM / (Δ°C)²	-20 °C~ +60 °C	32.768 kHz

• STANDARD SPECIFICATIONS

PARAMETERS	MAX (unless otherwise noted)
Frequency	32.768 kHz
Frequency Tolerance @ 25ºC	± 20 PPM
Frequency Stability Temperature Coefficient	-0.04 PPM / (Δ°C)²
Temperature Range Turnover (TO) Operating (TOPR) Storage (TSTG)	 +20ºC ~ +30ºC -20ºC ~ +60ºC -30ºC ~ +70ºC
Equivalent Series Resistance (RS) NC15 / NC26 NC38	 50 kΩ 35 kΩ
Load Capacitance (CL)	12.5 pF (Standard) 6 pF (Optional)
Insulation Resistance @ 100VDC	500 MΩ Min
Drive Level	1.0 µW
Aging per year	±3 PPM

All specifications subject to change without notice.

Parabolic Temperature Curve

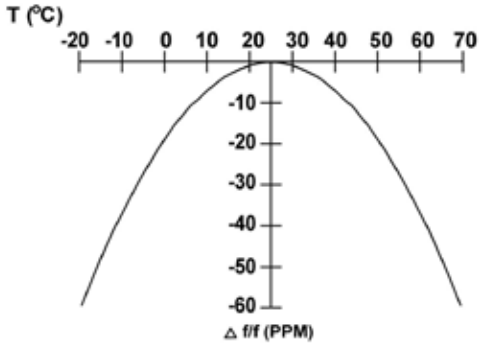

To determine frequency stability, use parabolic curvature (K).
For example: What is stability at 45°C?

1) Change in T (°C) = 45-25 = 20°C
2) Change in frequency = -0.04 PPM * (Δ C)²
= -0.04 PPM * (20)²
= -16.0 PPM

NC15LF



NC26LF



NC38LF

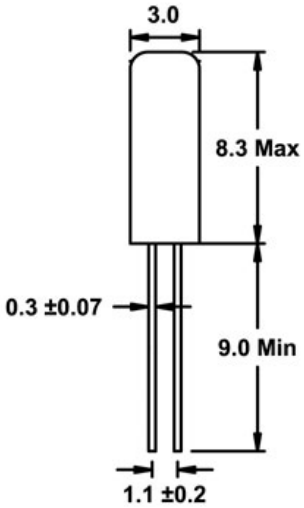

All dimensions are in millimeters.

FOX Electronics 5570 Enterprise Parkway Fort Myers, Florida 33905 USA +1(239) 693.0099 FAX +1 (239) 693.1554 http://www.foxonline.com
EMEA United Kingdom Tel/Fax: +44 .1767.312632 | Asia Hong Kong Tel: +852.2854.4285 FAX +852.2854.4282