



Innvolution is a leading medical technology company dedicated to advancing cardiac care through innovation. Specializing in interventional cardiology, the company offers a comprehensive range of high-performance medical devices, including cutting-edge Cath labs, advanced drug-eluting stents, and precision-engineered balloon catheters. Additionally, Innvolution provides Y-connectors, radial artery tourniquets, introducer sheath kits, in-deflation devices, control syringes, and manifolds to support seamless cardiac interventions. With a commitment to enhancing patient outcomes and empowering healthcare professionals, Innvolution continues to deliver solutions that redefine excellence in cardiac healthcare.

Marketed by:
Innvolution Healthcare Pvt. Ltd.

Manufacturing Unit
Plot No. 105, Solitaire Industrial
Park, Village Dehmikalan,
Teh Sanganer, Jaipur - 303007,
Rajasthan (India)

Head Office
Plot No. 121/F, Hosur Rd, 1st Phase,
Bommasandra Industrial Area, Bengaluru,
Karnataka 560099

Marketing Office
Advant Navis Business Park Plot #7,
Office No:1012, B Wing, 10th Floor, Tower B,
Noida-Greater Noida Expy, Sector 142, Noida, Uttar
Pradesh, India 201 305.

International Office
Marina Bay Financial Centre Tower 1,
Level 11, 8 Marina Boulevard,
Singapore 018 981.

Telephone No.: +91-120-4193839 | FAX: +91-120-4193839
Email: info@innvolution.com | Website: www.innnvolution.com

CARDIAC ACCESSORIES

Reliable Access, Perfect Intervention



For more details visit www.innnvolution.com

Y- Connector (Push Click)



DPY02



DPY01B
Push-Click Type Hemostasis Valve,
Blue Torque, Guidewire Introducer



DPY02B
Push-Click Type Hemostasis Valve
with fixed bypass extension tube,
Blue Torque, Guidewire Introducer

Features:

- Unique push-click design
- Torque and Introducer Fit 0.014"- 0.021" Guidewire
- 180 psi leak-proof seal from proprietary valve

Benefits:

- Convenient operation, effectively reduce blood loss
- Fulfilling PCI procedural needs

Push-Click Y Connector Kit				
Description	Ref. No.	Torque Device	Guidewire Introducer	Extension Tubing
Push-Click Y Connector	DPY01	N	N	N
	DPY02	N	N	Y
Push-Click Y Connector Kit	DPY01B	Blue Torque	Y	N
	DPY02B	Blue Torque		Y

Y- Connector (Twist)



DRY01B



DRY01

Features:

- Memory hemostatic device
- Large inner diameter
- 300 psi leak-proof seal from proprietary valve

Benefits:

- Effectively reducing blood loss
- Fulfilling PCI procedural needs

Y Connector Pack (Twist)				
Description	Ref. No.	Torque Device	Guidewire Introducer	Extension Tubing
Y Connector (Twist)	DRY01	N	N	N
Y Connector Pack (Twist)	DRY01B	Blue Torque	Y	N
Y Connector Pack (Twist)	DRY02B	Blue Torque	Y	Y



D1D30S (OFF)
30 atm, 20 ml volume,
with 3-Way stopcock (OFF)



DPD30/0FF
30atm, 30ml volume,
with 3- Way stopcock(OFF)

Balloon In-Deflation Device

Features:

- Ergonomic design
- Selok® patent technology
- Precise pressure gauges
- Maximum pressure of 30 atm
- 20 ml clear syringe barrel with smooth moving plunger

Benefits:

- Suitable for left and right hand, easy to operate, reduce fatigue
- The pressure is stable and does not fall back at high pressure
- Fast release key design, easy pressure relief
- The accuracy is higher than that of similar domestic products

Balloon In-Deflation Device II

Features:

- 30 ml clear syringe barrel with smooth moving plunger
- The manometer is adjustable 45° left and right
- Night light dial

Benefits:

- The performance of the second generation is fully upgraded compared with that of the first generation
- Visible in low light
- Broader clinical usage

Interventional Device Set



Interventional Device Set

Ref. No.	Pack Content
DAS001	Y Connector Pack(Twist Type), Guidewire Introducer, Blue Torque, Balloon In-Deflation Device, 3-Way Stopcock(OFF)
DAS007	Push-Click Y Connector Kit, Bypass without Extension Tube, Guidewire Introducer, Blue Torque, In-Deflation Device, 3-Way Stopcock (OFF)
DAS013	Push-Click Y Connector Kit, Bypass with Fixed Extension Tube, Guidewire Introducer, Blue Torque, In-Deflation Device
DAS020	Push-Click Y Connector Kit, Guidewire Introducer, Blue Torque, In-Deflation Device, 3-Way Stopcock (OFF)

? Please ask your sales representative for more configuration.

Balloon In-Deflation Device

Description	Ref. No.	Nominal Max Pressure (atm)	Capacity (ml)	3-Way Stopcock
Balloon In- Deflation Device	DID30S(OFF)	30	20	Y
Plus- Balloon In-Deflation Device	DPD30/0FF	30	30	Y

Radial Artery Compression Tourniquets (Flat)



Features:

- Transparent Pad
- Spherical design
- Elastic Pressure belt
- Supporting pad has no contact with wrist

Benefits:

- Easy to locate and observe
- Effective hemostasis
- Provides high comfort
- Avoiding putting pressure on ulnar artery

Radial Artery Compression Tourniquets

Ref. No.	Description	Length of Plate(mm)	Length of Band (mm)
DHD0914	Radial Artery Compression Tourniquet	90	140
DHD0916	Radial Artery Compression Tourniquet	90	160

Radial Artery Compression Tourniquets (Rotary)



Features:

- Efficient: Single-large deck observation window, which provides a more efficient view of the puncture site.
- Comfort: Ergonomic design and premium Velcro
- Easy Operation: Well-educated market(watch wearing method)
- Safety: Zero pressure on the ulnar side, safety buttons, and yellow stitches on the band as an alert.

Details

Perspectives	Demax
Material of Band	Velcro & Nylon
Design of Window	Single Deck
Safety Gear	Large
Compression on Ulnar Artery	No

Models and Specifications

No.	Model	Specification/Strap length
1	DRD17	170 mm
2	DRD19	190 mm
3	DRD21	210 mm

Control Syringes



Features:

- Glass-like polycarbonate barrel with enhanced scale markings
- Designed for one-hand operation
- Plunger with latex-free stop

Benefits:

- Easy fluid inspection
- Smooth movement

Control Syringe

Ref. No.	Volume (ml)
DS312	12

High Pressure line



Features:

- Pressure rating up to 500 psi
- Standard length at 900 mm and 1220 mm

Benefits:


- Fulfilling PCI procedural needs
- Stable performance

Pressure Line

Pressure	Ref. No.	Rotated Male Luer Lock	Length(cm)
500psi	DT500090	N	90
	DT500122	N	122
	DT500090R	Y	90
	DT500122R	Y	122

Manifolds

DMS001(OFF)
500 psi, "OFF" handle

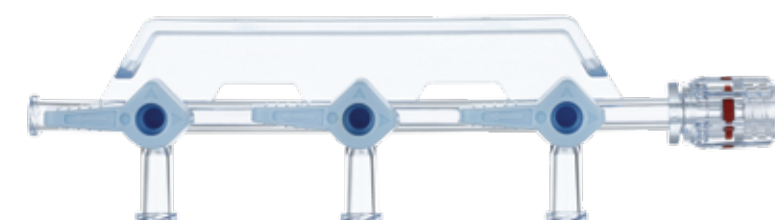

DM5003(OFF)
500 psi, 3 port "OFF" handle

Features:

- 3-port manifold with pressure rating up to 500 psi
- Clear body
- Rotating luer for secure connections

Benefits:

- Meet a variety of surgical needs
- Easy visibility for de-bubbling
- Easy operation

Manifolds

Description	Ref. No.	Pressure Resistance	Type of Stopcock
3 ways of stop cock	DM5001 (ON)	500psi	ON
	DM5001(OFF)	500psi	OFF
3-port manifold	DM5003(ON)	500psi	ON
	DM5003(OFF)	500psi	OFF

Introducer Sheath Kits

Femoral Introducer Sheath



Radial Introducer Sheath



Introducer Sheath Kits (Hydrophilic)



Features:

- Atraumatic tapered tip
- Hydrophilic coating

Benefits:

- Minimising vascular damage
- Reduce injury from instruments entering the vessel

Introducer Sheath Kits (Radial/Femoral)

Ref.No.	French Size	Sheath Length (cm)	Guidewire size	Needle	Needle Gauge	Femoral	Radial	Hydrophilic Coating	Metal Guidewire	Metal Guidewire with Hydrophobic coating
DQ05082121T	5F	8	0.021"	Metal	21G		✓	✓	✓	
DQ05082121S	5F	8	0.021"	Metal	21G		✓	✓		✓
DQ05112121T	5F	11	0.021"	Metal	21G		✓	✓	✓	
DQ05112121S	5F	11	0.021"	Metal	21G		✓	✓		✓
DQ06082121T	6F	8	0.021"	Metal	21G		✓	✓	✓	
DQ06082121S	6F	8	0.021"	Metal	21G		✓	✓		✓
DQ06112121T	6F	11	0.021"	Metal	21G		✓	✓	✓	
DQ06112121S	6F	11	0.021"	Metal	21G		✓	✓		✓
DQ07082121S	7F	8	0.021"	Metal	21G		✓	✓		✓
DQ07082121T	7F	8	0.021"	Metal	21G		✓	✓	✓	
DQ07112121S	7F	11	0.021"	Metal	21G		✓	✓		✓
DQ07112121T	7F	11	0.021"	Metal	21G		✓	✓	✓	
DQ05113818T	5F	11	0.038"	Metal	18G	✓		✓	✓	
DQ06113818T	6F	11	0.038"	Metal	18G	✓		✓	✓	
DQ07113818T	7F	11	0.038"	Metal	18G	✓		✓	✓	
DQ08113818T	8F	11	0.038"	Metal	18G	✓		✓	✓	
DQ06112120S	6F	11	0.021"	Trocar	20G		✓	✓		✓
DQ06112120T	6F	11	0.021"	Trocar	20G		✓	✓	✓	

Features:

- Smooth transition between dilator and the sheath
- Polymer guidewire with hydrophilic coating and IV catheter

Benefits:

- Minimising vascular damage
- Reduce injury from instruments entering the vessel
- Better experience for doctors and patients

Introducer Sheath Kits (Hydrophilic)

Ref. No.	French Size	Sheath Length(cm)	Guidewire size	Needle	Needle Gauge	Radial	Hydrophilic Coating	Polymer Guidewire
DXQ05082520	5F	8	0.025"	Trocar	20G	✓	✓	✓
DXQ05112520	5F	11	0.025"	Trocar	20G	✓	✓	✓
DXQ06082520	6F	8	0.025"	Trocar	20G	✓	✓	✓
DXQ06112520	6F	11	0.025"	Trocar	20G	✓	✓	✓
DXQ07082520	7F	8	0.025"	Trocar	20G	✓	✓	✓
DXQ07112520	7F	11	0.025"	Trocar	20G	✓	✓	✓
DXQ08082520	8F	8	0.025"	Trocar	20G	✓	✓	✓
DXQ08112520	8F	11	0.025"	Trocar	20G	✓	✓	✓