



VivoHeart®

Intravascular Ultrasound Imaging System



High Resolution

60 MHz center frequency for high-resolution and crystal-clear imaging.



High Speed


150 mm Automatic pullback distance.
10 mm/s Fastest pullback speed.
100 FPS Highest frame rate.



High Efficiency

InSmartVision™ Image Analysis Platform.
EasyGo™ IVUS-Angio co-registration.

TrueVision® Image Catheter Specifications

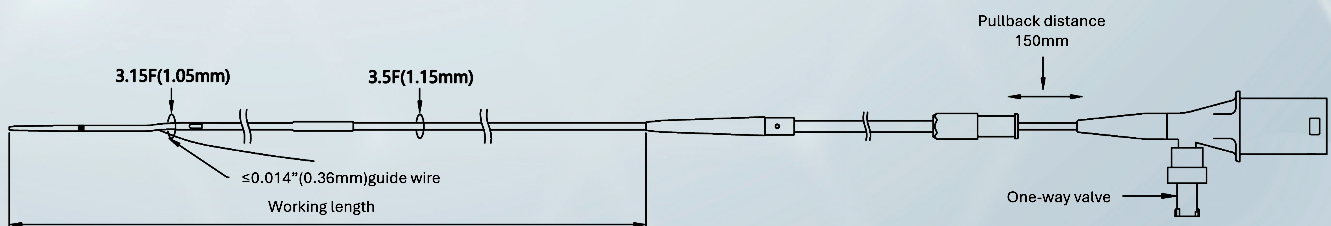

Model : TRUEVISION®

Distal Diameter: 3.15F (1.05 mm)	Pullback distance: 150 mm
Compatible Wire: 0.014" (0.36 mm)	Compatible guide catheter: 6F
Proximal Diameter: 3.5F (1.15 mm)	Working Length: 1350 mm
Tip to Transducer: 20 mm	

IVUS Comparative Table


Brand	Innvolution		BSC		Philips	
Type	Rotational		Rotational		Rotational	Phased Array
Center Frequency (MHz)	60	40	60	40	45	20
Axial Resolution (μm)	22	38	22	38	50	<170
Penetration depth diameter(mm)	>12		>12		>12	>20
Full Vessel Image analysis	✓ (InsmartVision™)		✓ (only for AVVIGO+) (ALA)		✗	
IVUS-Angio Co-registration	✓ (EasyGo™)		✗		✓ (Only for 20 MHz) (SyncVision)	



60
MHz




40
MHz




Tapered
Catheter Design




40 MHz & 60 MHz
transducer frequency



150 mm Pullback
distance



Complete
Co-registration
with HD images



Wide spectrum
with higher clarity

