

Maintenance Procedure


No. MP1170

Page 1 of 1

TASK DESCRIPTION CHARGING TOILET
BUILDER'S OR VENDOR'S MAINTENANCE INSTRUCTIONS MPI LOCOMOTIVE MAINTENANCE MANUAL, SECTION 11
SPECIAL TOOLS REQUIRED:
RELATED MAINTENANCE PROCEDURES MODIFICATIONS, POINTERS, ETC.
SAFETY PRECAUTIONS: CONTRACTOR TO ASSUME RESPONSIBILITY FOR SAFETY RULES AND COMPLIANCE.
PREPARATION:

PROCEDURE

1. To charge the pneumatically operated toilet for operation, fill the tank with the required precharge of water through the water fitting at the right front corner of the locomotive or through the bowl.
2. A correct charge covers the filter grid about 1/4 to 3/4" after flushing, or 4.2 gal.
3. Press the flush button and add the contents of one (1) package of Monogram DG 19 toilet chemical through the bowl while the toilet is flushing.
4. The toilet is now ready for use. (Note: DG 19 contains a chemical which initially forms soft, light-colored granules. These granules dissolve as bacteria are neutralized and will not damage the toilet mechanism).

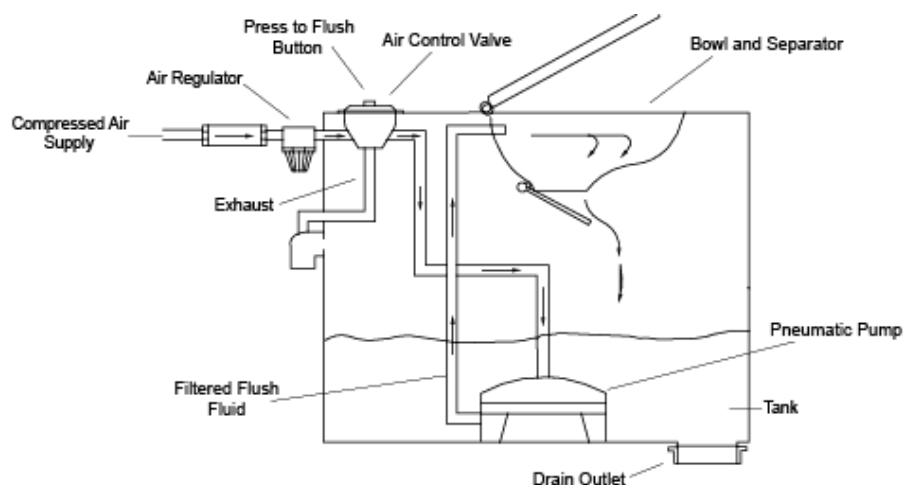

DATE OF FIRST ISSUE	September 2007	AUTHORIZED BY: TITLE: Manager, Rail Equipment
REVISION 1	August 2009	