



COMPANY PROFILE

Powering
Industries
with **Quality**
and **Trust**

APPROVED BY



info@kron.sa



01381 61558



Balhamar Bussiness Gate,
Dammam, KSA



WWW.INCATECH.COM.TW

TABLE OF CONTENTS

ABOUT US	03
OUR SERVICES	04
LIST OF MAJOR CLIENTS	06
LIST OF FIRESTOP PRODUCTS	07
INSS1440 FIRE BARRIER CAULK	10
ELASTOMETRIC IRE CAULKFIRE SEALANTINS1186	12
INTUMSCENT WRAP STRIP INFS0812/INFS0822	13
FIRESTOP COLLAR-SSCI	14
FIRESTOP SHEET FP-02	16
FIRESTOP SHEET FP-04+	17
COATED FIRESTOP BOARD FP-05	19
MORTAR CFSOI	20
FIREPROOF BLANKET	22
FIRE CABLE COATING DC6150	24
SPRAY TO PROTECT DC68	25
FIRE BARRIER SILICONE SEALANT INS2460	26
WHY INCA FIRESTOP PRODUCTS	27
TECHICAL SEMINARS	27
MATERIAL ESTIMATION AND QUOTATION	28
METHODS OF APPLICTION	29
FIRESTOP INTERNAL INSPECTION	30
OUR PROJECTS	31
KRON & DONPCRANES IN SAUDI ARABIA	32
OILFIELD SUPPORTS SERVICES	32
CEMENTING & CASING ACCESSORIES	32
EXPERTISE IN CHEMICAL & PETROCHEMICAL INDUSTRIES	32

ABOUT US

KRON Oilfield Service Company established in 2018 and has taken upon Itself to become the main role in the distribution of Industrial & laboratory chemicals, Firestopping and Fireproofing products for major manufacturers in various sectors such as Foodstuffs, Pharmaceutical, Water Treatment, waste, Commercial & Residential constructions and providing Quality Oilfield Services and other sectors spread throughout the Kingdom of Saudi Arabia.

We are proud to be the best in producing chemicals and providing Oilfield services in our various branches in the Kingdom of Saudi Arabia



OUR SERVICES

- Supply of Chemical for Petrochemical
- Provide Oilfield Services Drilling, Completion & Production Services
- Supply and Apply of Firestop products and solutions
- Industries Supply of Oilfield
- Chemicals Supply of Water Treatment chemicals
- Cable coating / Fire proofing





OUR VISION

Our vision is to provide our customers with high quality products that meet their needs, with continuous development and improvement to increase the competitive strength in the local market, and most importantly to build long-term relationships with our customers in the Kingdom of Saudi Arabia.



OUR MISSION

Providing outstanding quality in the Chemical Industry and Oilfield Services; We will work closely to meet market demands with all of our partners to obtain the highest level of customer satisfaction while adhering to the highest levels of integrity in all business.



OUR VALUES

We are always transparent with all our partners, We work hard to support our customers and suppliers to ensure satisfaction throughout the Kingdom of Saudi Arabia, Adhere to the highest ethical standards at all times Continuous development to meet market needs

LIST OF MAJOR CLIENTS



SOUTH PROJECTS



ARCHIRODON

WE WORK WITH LEADING GOVERNMENT AUTHORITIES, UTILITIES,
AND WORLD-CLASS ENGINEERING ORGANIZATIONS, DELIVERING
RELIABLE SOLUTIONS ACROSS SAUDI ARABIA'S POWER,
INFRASTRUCTURE, AND DEVELOPMENT SECTORS

LIST OF FIRESTOP PRODUCTS

MEP THROUGH PENETRATIONS FIRESTOP PRODUCTS

- ✓ **FIRE BARRIER CAULK**
(INS1440)
- ✓ **INTUMESCENT STRIP**
(INFS0812)
- ✓ **FIRESTOP COLLAR**
(SSCI-X)
- ✓ **FIRESTOP SHEET**
(FP02)
- ✓ **FIRESTOP SHEET**
(FP04+)
- ✓ **COATED FIRESTOP BOARD**
(FP05)
- ✓ **MORTAR**
(CFS01)
- ✓ **MOLDABLE FIRESTOP PUTTY**
(FM011)

- ✓ **INCA PUTTY PAD**
- ✓ **FIRESTOP PUTTY**
(FM012)
- ✓ **FIRE BARRIER FOAM**
(US 110)
- ✓ **FIRE BARRIER FOAM**
(US 150)
- ✓ **FIRESTOP BRICK**
(US150)
- ✓ **FIREPROOF BLANKET**
(FP 05)
- ✓ **INCA FIREWRAP BLANKET**
(FB01 15)
- ✓ **INCA HITS INTUMESCENT
SHEET**



FIRE RESISTIVE JOINT PRODUCTS

THROUGH PENETRATION FIRESTOP PRODUCTS



FIRE PROOF COATINGS

GENERAL PURPOSE SEALANTS



- ELASTOMERIC FIRE CAULK INSS1186
- SMOKE AND ACOUSTIC SEALANT INSS0285
- FIRE BARRIER SILICON SEALANT INSS246

- INSS1440
- INFS0812
- SSCI -X
- FP02
- FB04+
- FP05
- CFS01
- FM011
- INCA PUTTY PAD
- FM012
- US110
- US150
- US150 BRICK
- FB01-15
- PROWRAP BLANKET
- INCA HITS INTUMESCENT SHEET

- SPRAY TO PROTECT DC68
- INTUMESCENT FIREPROOF PAINT DC333
- FIREPROOF CABLE COATING DC 310
- CABLE COATING DC 6150
- INTUMESCENT COATING DC7120

- NEUTRAL WEATHER SEALANT -NWS 2000
- STRUCTURAL GLAZING SEALANT SGS 6000

INSS1440 FIRE BARRIER CAULK

Industry leading Firestop Technology, INSS1440 Fire Barrier Caulk Fire Sealant is a single component water-based acrylic intumescent firestop sealant.

INSS1440 Fire Barrier Caulk Fire Sealant Listed designs use less product and offer exceptional performance, making it more cost effective than other traditional firestop caulking's. The product's fast expansion technology quickly fills voids, offering excellent protection from fire, heat transfer, smoke and gases.

INSS1440 Fire Barrier Caulk Fire Sealant is used for sealing gaps around single or multiple penetrations through interior walls and floors, or for sealing gaps around doors and window frames in critically fire rated structures. INSS1440 Fire Barrier Caulk will adhere to most construction materials and penetrant items, is installation friendly, asbestos and halogen free, and can be painted after full curing.



■ APPLICATIONS



AIRDUCT



CABLE
BUNDLE



INSULATED
PIPE



PLASTIC
PIPE



CABLE TRAY



BUSWAY



METALLIC
PIPE



MULTIPLE
PENETRATIONS

■ FEATURES

SPECIFIC DENSITY: 1.50 ± 0.1 G/CM³
 COLOR: GRAY
 TACK FREE TIME: 30 MINUTES
 CURING TIME: 7 – 21 DAYS
 EXPANSION RATE: 3 – 5 TIMES
 APPLICATION TEMPERATURE: 40° F – 104° F
 (5° C – 40° C)
 IN-SERVICE TEMPERATURE: -13° F – 176° F
 (-25° C – 80° C)
 STORAGE TEMPERATURE: 50° F – 95° F
 (10° C – 35° C)
 PACKAGING: 310 ML/TUBE, 25/CTN;
 600 ML/SAUSAGE, 20/CTN; 1 GAL/PAIL & 5
 GAL/PAIL
 SHELF LIFE: 24 MONTHS
 PERFORMANCE: 50+ YEARS HOAC TESTED

TESTED

ASTM E814 up to 3 hrs. F&T Rating
 UL 1479 up to 3 hrs. F&T Rating
 L Rating at Ambient - Less than 1 cfm/sq. ft.
 ULC S-115 up to 3 hrs. F Rating
 up to 90 minutes FT Rating
 up to 3 hrs. FH Rating
 up to 90 minutes FTH Rating
 L Rating at Ambient - Less than 5.1 L/S/m²
 FM Approved
 CNS 14514 up to 3 hrs. Class A&B
 GB 23864, ASTM E84 - Flame 5 Smoke 20
 ASTM E662 & FAR 25.853



ELASTOMERIC FIRE CAULK FIRE SEALANT – INSS1186

Industry leading Firestop Technology, INSS1186 Elastomeric FireCaulk Fire Sealant is a water based acrylic elastomeric resin material that offers excellent flexibility even after full curing. INSS1186 Elastomeric FireCaulk Fire Sealant is tested in accordance with UL 2079 and ULC S-115 for use on dynamic construction joints system, such as Head of Wall, Wall to Wall, Floor to Wall and Floor to Floor joints. INSS1186 Elastomeric FireCaulk Fire Sealant can be applied by brush, bulk caulking gun, trowel or airless sprayer. It is compatible with and adheres to common construction materials and it withstands compression and extension in dynamic joints, without losing its adhesion.



■ APPLICATIONS



JOINT
SYSTEMS



PARTITION
WALL

■ FEATURES

DENSITY: 1.5±0.1 G/CM³
SOLID CONTENT (BY WEIGHT): 75% PH VALUE: 3-7
VOC: 4 G/L DRY TO TOUCH: 30 MINUTES
CURING TIME: 3-7 DAYS

TESTED

ANSI/UL 2079, 3 Hr Rating
at 4" Nominal Joint
L Rating At Ambient — Less Than 1 CFM/ Lin
FT CAN/ULC, S 115 F, FT, FH, FTH Rating
3 hours at 4" Nominal
L Rating at Ambient - Less than 1.55
L/S/m² ASTM C 719, Cyclic Movement
12.5% Movement capability 8% compression
or extension (Class II or III)
ASTM D4587 Extended Weathering
ASTM-E84 Flame 0 Smoke 5
ASTM E 1966, ASTM 2307



INTUMESCENT WRAP STRIP

INFS0812 / INFS0822



INFS0812 Intumescent Strips are quickly and easily installed providing a convenient solution for firestop contractors. Providing high expansion rate and volume means that the INFS0812 design requires less strips to seal the openings, making it more cost effective than other traditional firestop intumescent strips.

INFS0812 Intumescent Strips expand when heated and maintain a tight seal. When used with combustible penetrants such as plastic pipe, INFS0812 blocks the spread of fire, smoke, toxic gases, even as the penetrant is consumed by fire.

INFS0812 Intumescent Strips are also used in conjunction with our SSCI Firestop Collar to tightly seal any opening that is created as a combustible item is consumed by fire.

Meets the intent of LEED® VOC environmental air quality requirements


■ APPLICATIONS



INSULATED
PIPE



PLASTIC
PIPE



CABLE TRAY



MULTIPLE
PENETRATIONS

■ FEATURES

INFS0812: 5mm x 60mm x 2M
 INFS0822: 5mm x 60mm x 10M
 Color: Black
 Expansion Rate: ≥ 20 times
 L.O.I: ≥ 40
 In-Service Temperature: $-13^{\circ}\text{F} - 176^{\circ}\text{F}$ ($-25^{\circ}\text{C} - 80^{\circ}\text{C}$)
 Storage Temperature: $50^{\circ}\text{F} - 95^{\circ}\text{F}$ ($10^{\circ}\text{C} - 35^{\circ}\text{C}$)
 Environmental Exposure Tests
 Accelerated aging: Passed
 High Humidity: Passed
 Performance: 50+ years HOAC Tested

TESTED

ASTM E 814 up to 3 hrs, F and T Ratings
 UL 1479, 3 hrs, F and T Ratings
 L Rating at Ambient - Less than 1 cfm/sq. ft.
 FM Approved
 ASTM E 84 - Flame 0 Smoke 25
 CNS 14514, 3 hrs, Class A and B
 GB 23864
 ASTM E662 & FAR 25.853 (1998)



FIRESTOP COLLAR – SSCI

Industry leading Firestop Technology, SSCI Firestop Collar is a stainless steel collar intended to be used in conjunction with INFS0812 Intumescent Strip to tightly seal any opening that is created as a material is

consumed by fire. This combination will restore the fire resistance rating of walls, floors and seals against the passage of flames, toxic fumes and smoke.

INFS0812 Strip and SSCI Firestop Collar are designed to make installation quick and easy.

SSCI and INFS0812 Fire designs require less product and offer exceptional performance, making SSCI and INFS0812 more cost effective than other traditional firestop collars and strips.



SSCI is intended for penetrating items such as non metallic pipes, plastic pipe, and insulated pipes


■ APPLICATIONS



PLASTIC
PIPE



INSULATED
PIPE



MULTIPLE
PENETRATIONS

TESTED

ASTM E 814 up to 3 hrs, F and T Ratings
UL 1479, 3 hrs, F and T Ratings
L Rating at Ambient - Less than 1 cfm/sq. ft.
FM Approved
ASTM E 84 Flame 0 Smoke 25
CNS 145143 hrs, Class A and B GB 23864 25
ASTM E662



■ FEATURES

In-Service Temperature: -13° F – 176° F (-25° C – 80° C)
Storage Temperature: 40° F – 104° F (5° C – 40° C)
Performance: 50+ years HOAC tested

SSCI is available in all standard pipe sizes or in a bulk kit that can be cut to be fitted on site by the applicator

FIRESTOP SHEET – FP-02

FP-02 is an industry leading Firestop Sheet fabricated by bonding proprietary intumescent materials to a metal sheet. FP02 securely blocks flame and is designed to seal large penetrations through fire-rated walls and floors. It is also used for shielding cable trays, conduit, HVAC and vital process equipment from radiant heat, flame spread and smoke.

FP-02 Firestop Sheet steel backer provides structure to the assembly making a safe firestop solution for floor openings.

Easily re-penetrable and repairable with a common hole saw, it is the most cost effective solutions for large openings on the market today.



FP-02 Firestop Sheet is easily trimmed to different sizes to fit any installation or large openings and works with nearly all construction materials. It is halogen and asbestos free, is very stable and maintenance free.

Meets the intent of LEED® VOC environmental air quality requirements

■ APPLICATIONS



AIRDUCT



PARTITION
WALL




INSULATED
PIPE




PLASTIC
PIPE



NO
PENETRATION



METALLIC
PIPE



MULTIPLE
PENETRATIONS

■ FEATURES

SIZE: 90CM X 90CM
 THICKNESS: 7.7 ± 1.3 MM
 WEIGHT (PER SHEET): 11 KGS
 EXPANSION RATE: 5 – 10 TIMES
 IN-SERVICE TEMP: -13° F – 176° F
 (-25 °C – 80° C)
 PACKAGING: SINGLE SHEET

TESTED

ASTM E814 up to 2 hrs, F Rating
 ASTM E84 - Flame 5 Smoke 90
 CNS 14514 2 hrs, Class A & B
 FM Approved
 GB 23864
 ASTM E662



FIRESTOP SHEET – FP-04+


FP-04+ is an industry leading Firestop Sheet fabricated by bonding proprietary intumescent materials to a metal sheet. FP04+ securely blocks flame and is designed to seal large penetrations through fire-rated walls and floors. It is also used for shielding cable trays, conduit, HVAC and vital process equipment from radiant heat, flame spread and smoke.




FP-04+ Firestop Sheet is thinner than our FP-02, providing a more cost effective solution for double-sided applications such as walls. It is easily re-penetrable and repairable with a common hole saw and can easily be trimmed to different sizes to fit any installation or large openings, working with nearly all construction materials. It is halogen and asbestos free, is very stable and maintenance free.

Meets the intent of LEEDS® VOC environmental air quality requirements.

■ APPLICATIONS

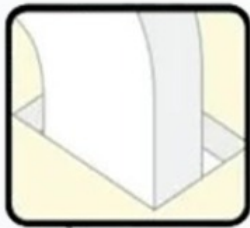

AIRDUCT




PARTITION
WALL




INSULATED
PIPE



PLASTIC
PIPE




NO
PENETRATION



METALLIC
PIPE



MULTIPLE
PENETRATIONS



CABLE TRAY

■ FEATURES

Size: 90 cm x 90 cm

Thickness: 2 mm

Weight : 5.6 Kgs/Sheet

Expansion rate: 10 Times

In-Service Temp: -13° F – 176° F
(-25° C – 80° C)

Packaging: Single sheet

Largest Listed opening: up
to 74 square feet

Performance: 50+ years HOAC
tested

TESTED

ASTM E 814 up to 3 hrs, F and T Rating
UL 1479, 3 hrs, F and T Rating
L Rating at Ambient - Less than 1 cfm/sq ft.
ULC S-115 up to 3 hrs, F Rating
Up to 1 -1/2hrs FT Rating Up to 3 hrs FH
Rating
Up to 1 hr FTH Rating
L Rating at Ambient – Less than 5.1 L/Sm
ASTM E84 Flame 5 Smoke 90
FM Approved, CNS 14514



COATED FIRESTOP BOARD

FP-05

Industry leading Firestop Technology, FP05 Coated Firestop Board is a 50mm thick high-density mineral fiberboard coated with GC99-20 Fireproof Coating used to create a fire barrier system, which can restore up to 2 hours fire rating. In case of fire, the coated surface of Firestop board will expand up to 30 times, reducing the spread of fire and smoke. FP05 offers exceptional performance, is easily cut to fit on site and factory-metered doses of coating assure inspectors the correct amount has been applied, making FP05 more cost effective than other traditional firestop solutions.



FP05 is odorless, non halogenated and low VOC. When installed according to our Listed systems, it will restore the STC rating and provide an air-tight, smoke-tight firestop assembly.


Meets the intent of LEED® VOC environmental air quality requirements.

■ FEATURES


Color: White
Size: 1200 X 600X 50mm
Bending Strength: ≥ 0.1 Mpa
Density: 160Kg/m³
In-Service Temp: -13° F – 176° F (-25° C – 80° C)

Application Temp: 40° F – 104° F (5° C – 40° C)
Package (FP05) 4 Pieces/Case
Package(GC99-20) 1 Gal/Pail
Performance: 50+ years HOAC tested

■ APPLICATIONS

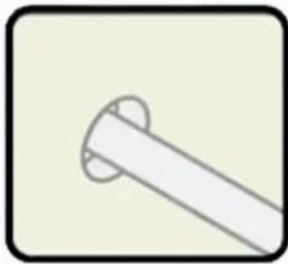

METALLIC
PIPE



CABLE TRAY

TESTED

ASTM E814 2 hrs F & T Rating
UL 1479 2 hrs F & T Rating
L Rating at Ambient - Less than 1 cfm/sq ft.
CAN/ULC S-115 2hrs F, FT; FH, FTH Ratings
L Rating at Ambient - Less than 1.55 L/S/m
FM Approved
ASTM E84
GB 23864
ASTM E662



MORTAR – CFS01

CFS01 Mortar is an industry leading non-intumescent firestop mortar comprised of a proprietary blend of gypsum and cement. CFS01 Mortar is designed with installation convenience in mind. Our “Variable Viscosity” technology allows the installer to add less water for a thicker consistency or more water for a thinner consistency, depending on the application needs. CFS01 Mortar provides up to 3 hours fire rating to prevent passage of flame, smoke, and toxic fumes.


Per its mix ratios, CFS01 Mortar is the most cost effective mortar solution on the market. It is typically used to seal mechanical and electrical service penetrations, blank



openings and other large annular spaces in fire-resistance rated wall and floor assembly testing. CFS01 Mortar is non-shrinking, paintable, fast drying, safe, simple to use, halogen and asbestos free. Water and gas impermeable, it offers excellent structural strength while still being re-penetrable and repairable.

Meets the intent of LEED® VOC environmental air quality requirements

■ APPLICATIONS




BUSWAY



INSULATED
PIPE



PLASTIC
PIPE




NO
PENETRATION




METALLIC
PIPE



MULTIPLE
PENETRATIONS



CABLE TRAY

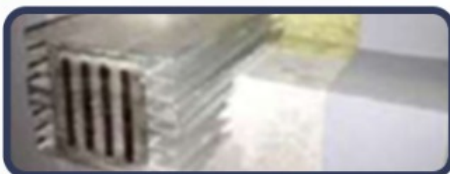

TESTED

ASTM E814 2 hrs F & T Rating
UL 1479 2 hrs F & T Rating
L Rating at Ambient - Less than 1 cfm/sq ft.
CAN/ULC S-115 2hrs F, FT; FH, FTH Ratings
L Rating at Ambient - Less than 1.55 L/S/m
FM Approved
ASTM E84
GB 23864
ASTM E662



■ FEATURES

Mixing ratio by weight:(1 part mortar mix:0.85 – 0.95 part water)

Yield (per 20Kg): 22-25L (1345 in³ -1525 in³)

Density(after mixing):1480-1680kg/m³(Wet cast)

Drying time: 3 – 4 hours

Time to remove backer (if required):2 days

Fully cured: 28 days

Application Temperature Range: 40° F – 104° F(5° C – 40° C)

In-Service Temperature:-13° F – 176° F(-25° C – 80° C)

Packing: 20Kgs/Bag

Shelf Life: 3 years, when stored indoors in dry conditions in original unopened packaging

FIREPROOF BLANKET – FB01-15

FB01-15 Fireproof Blanket is an industry leading fire resistant wrap consisting of a ceramic fiber blanket encapsulated with a scrim-reinforced foil. It provides a flexible, non-combustible enclosure for duct or cable tray applications. The thermal insulation of FB01-15 can be used in combination with Listed systems to provide a "T" rating to penetrating items.

FB01-15 Fireproof Blanket is easily trimmed to different sizes to fit any installation and can be easily installed to wrap air ducts or metal conduit and cable tray. Lightweight and highly flexible for easy installation, asbestos free, low flame spread and smoke development, FB01-15 offers excellent fire resistant performance.

Meets the intent of LEED® VOC environmental air quality requirements




TESTED

UL 1479; 3 Hours; T, F and L Rating
ASTM E662
ASTM E 84
CNS 14514; 3 Hours Class A and B



APPLICATIONS



AIRDUCT




PLASTIC
PIPE




CABLE
BUNDLE



INSULATED
PIPE



CABLE TRAY



BUSWAY

FEATURES

Thickness: 13 mm
Width: 600 mm or 1200 mm
Length: 7200 mm in Roll Max.
Temperature: 1260° C (2300° F)
Density: 128 Kg/m Tensile

Strength: .05 Kg/cm
Package: 600 mm – 2 per box
1200 mm – 1 per box
Performance: 50+ years HOAC tested

FIRE CABLE COATING – DC6150

DC6150 Cable Coating is a non-halogenated, asbestos-free, non-toxic, flexible, ablative fire retardant cable coating designed to prevent the propagation of fire along plastic jacketed electrical cables. DC 6150 Cable Coating is FM Approved and tested to ensure it can withstand extreme conditions and salt water immersion. This testing also ensures that the protective coating does not reduce the current carrying capacity. DC 6150 Cable Coating is a water based latex and is suitable for both interior and exterior use.




■ FEATURES

Color: White
 Odor: Mild Lated
 Gloss Level: Matt
 Specific Gravity: 1.55 ± 0.1
 Solids by Weight: 70~76%
 pH Value: 6 ~ 8
 V.O.C.: 28 g/L
 Dry to Touch: 2 ~ 4 hours
 Dry Through: 2 ~ 4 days (Depending on ambient conditions)
 Application: Airless spray, brush or roller
 In-Service Temp: -13° F – 176° F (-25° C – 80° C)
 Typical Thickness: 1000 microns WFT (39.5 mils) equivalent to 640 microns DFT (25 mils)
 Packaging: 25Kg/pail
 Shelf Life: 12 months

■ APPLICATIONS



CABLE BUNDLE



CABLE TRAY

TESTED

FM3971
 IEEE383
 IEC60332
 IEEE1202
 GB28374



SPRAY TO PROTECT – DC68

New water based fire proofing spray that is a Non Toxic, Hypoallergenic, colorless and odorless formula that can be used on any water absorbent fabric or material*. DC 68 Spray to Protect: retards fire and prevents the spread of flame over the treated area. DC 68 reduces smoke generation which increases visibility and the time to escape a fire situation, cause of death in fires significantly increases and using DC 68 survivability.




DC 68 Spray to Protect: highly effective when applied to Curtains, Drapes, Carpets and Rugs, Upholstery, Decorations, Paper Products, Sleeping Bags, Mattresses, Wall Paper & amp; Coverings, Aprons, Boots, Table Cloths, or any Water Absorbent Fabric*. DC68 Spray to Protect: will not affect look, feel or ventilation qualities of most materials treated.

■ APPLICATIONS



Fabric



Textile



■ FEATURES

1. Conveniently Packaged: 24FL OZ(0.7L)
Trigger spray bottles
2. Special Order: 5 Gallon Pails and 55
Gallon drums
3. Coverage: 75 square feet per 24OZ

4. V.O.C.: No Formaldehyde
1. No Cadmium
2. No Lead, No Mercury
3. No Hexavalent Chromium Low

FIRE BARRIER SILICONE SEALANT


INS2460 / INS2460+

Industry Leading Firestop Technology INSS2460 Fire Barrier Silicone Sealant is a one part, neutral curing silicone sealant used to control the spread of fire, smoke, toxic gases, and water during fire conditions. INSS2460 offers exceptional performance and listed designs require less product, making it more effective than other traditional firestop silicone sealants. INSS2460 is designed to seal the gaps around penetrations through fire rated floors, walls or other assemblies as well as for sealing gaps around window and door frames in critically fire-rated structures.

INSS2460+ is a sprayable silicone based Firestop sealant that offers excellent flexibility, is waterproof and tested for up to 3 hour joint system in accordance with UL2079 and ULC-2115. Both products adheres to most construction materials including concrete, stone, plaster, metals, glass and plastics. They are installation friendly, are asbestos and halogen free and ideal for interior and exterior use or where contact with moisture is a concern.



■ APPLICATIONS

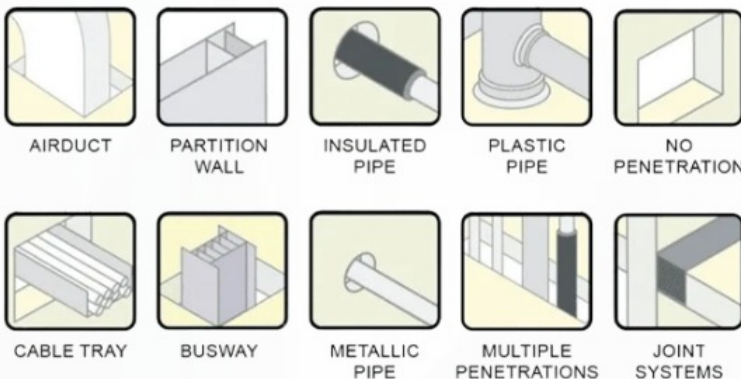

TESTED

INSS2460
 UL 1479 up to 3hrs, T, F and L Rating
 ULC S-115 up to 3hrs, FTH Rating
 CNS14514, 3hrs, Class A and B
 FM approved GB23864
 ASTM E84 - Flame 5 Smoke 45
 ASTM E662 & FAR 25.853,
 ASTM D412- 265%
 Elongation 42% Compression
 ASTM C719 - Cyclic Joint Movement 50%
 INSS2460+, L 2079, ULC S -115



■ FEATURES

Specific Gravity: 1.2 – 1.3g/cm³

Color: Gray

VOC: 53.20 g/L

Tack-free time: 30 minutes

Curing time: 7-14 days

Shrinkage (weight): 0.1%

Hardness (fully cured): SHORE A 30° – 40°

Application Temperature: 40° F – 104° F (5° C – 40° C)

In-Service Temperature: -13° F – 176° F (-25° C – 80° C)

Storage Temperature: 50° F – 95° F (10° C – 35° C)

Shelf Life: 12 months

Packaging: INSS2460-310 ml/Tube, 25/CTN 600ml/Sausage, 20/CTN;

INSS2460+ 1 gal/pail & 5 gal/pail

Performance: 50+ years HOAC tested

WHY INCA FIRESTOP PRODUCTS ?

- ✓ MATERIAL ESTIMATION & QUOTATION
- ✓ TECHNICAL SEMINARS
- ✓ TRAINING AND MOCK-UPS
- ✓ UL/INTERTEK BASED FIRESTOP ENGINEERING JUDGEMENTS
- ✓ FIRESTOP INTERNAL INSPECTION
- ✓ COMPLETE DOCUMENTS FOR THE APPROVAL

TECHNICAL SEMINARS

KRON'S REPRESENTATIVE IS AT YOUR SERVICE TO PROVIDE TECHNICAL SEMINARS RELATED TO FIRESTOP PRODUCTS & THE SYSTEMS, FREE OF COST

MATERIAL ESTIMATION & QUOTATION

KRON FIRESTOP CAN PROVIDE QUOTATIONS WITHIN THE TIMEFRAME, AS PER THE CLIENT REQUIREMENTS & TAKE OFF WILL BE DONE FROM KRON'S TRAINED AND QUALIFIED ESTIMATORS.

SPECIFIED AND CLARIFIED QUOTATIONS DONE AFTER THE SITE SURVEY IN CO-ORDINATION WITH THE CLIENTS / FROM THE DRAWINGS

TRAINING AND MOCK-UP

- TO ENSURE FLAWLESS AND EFFICIENT APPLICATION OF THE FIRESTOP PRODUCTS AS PER STANDARDS AND AUTHORITY REQUIREMENTS.
- HANDS ON TRAINING WILL BE PROVIDED TO CHECK THE COMPATIBILITY OF THE FIRESTOP PRODUCTS WITH THE EXISTING SITE CONDITIONS. KRON IS READY TO PROVIDE TRAINING UNTIL INSTALLERS ARE EXPERTISED.
- TRAINING CERTIFICATES WILL BE ISSUED TO THE INSTALLERS.

UL/INTERTEK BASED FIRESTOP ENGINEERING JUDGEMENTS

ENGINEERING JUDGMENTS WILL BE PROVIDED FOR THE VARIOUS SITE CONDITIONS BASED ON THE APPROVED UL/INTERTEK SYSTEMS WITHOUT COMPROMISING ITS RATINGS & REQUIREMENTS. KRON IS READY TO PROVIDE WIDE RANGE OF SOLUTIONS FOR THE VARIOUS SITE CONDITIONS, WHERE TESTED SYSTEMS ARE NOT APPLICABLE

METHOD OF APPLICATION

PURPOSE

This method of application covers the detailed procedure for installation of Firestop Systems. This procedure defines the method used to ensure that the installation of Firestop Materials has been carried out as per the project specification/approved standards, shop drawings manufactures recommendation

GENERAL EQUIPMENTS/TOOL REQUIRED

 BRUSH	 BOX CUTTER & KNIFE	 IRON RULER	 MEASURING TAPE
 CAULKING GUN	 SCISSORS	 SCRAPER	 SCRAPER

GENERAL APPLICATION DESCRIPTION

- 1.Clean the openings/annular spaces around the services properly
- 2.Ensure application area is clean and free of oil, loose dirt, rust or scale and is dry and frost free.
- 3.Install the correct depth and compression of packing material, if required, as detailed within the applicable listed system, allowing for sufficient depth of fill material.
- 4.Provide masking and temporary covering to prevent soiling of adjacent surfaces by firestopping materials.

5. Using a caulking gun, trowel or putty knife, apply fire sealant into the seams, gaps or voids between forming material and floor or wall surface
6. Tool the sealant surface smooth using a putty knife dipped in water, making complete contact with substrates to ensure an air and smoke tight seal.
7. Excess sealant, prior to curing can be done.
8. Leave completed seal undisturbed for 48 hours

FIRESTOP INTERNAL INSPECTION

- KRON CAN PROVIDE INTERNAL INSPECTION BASED ON THE CLIENT REQUIREMENTS TO ENSURE THE FIRESTOP INSTALLATIONS ARE DONE AS PER THE PROPOSED SYSTEMS & REQUIREMENTS.
- KRON REPRESENTATIVE WILL CO-ORDINATE WITH CLIENTS/CONTRACTORS TO RECTIFY THE COMMENTS AFTER INSPECTIONS.
- INTERNAL INSPECTION REPORTS WILL BE PROVIDED

DOCUMENTS FOR THE APPROVAL

- | | |
|----------------------------------|-----------------------------|
| • Approved Standards/
Systems | • Certificate of Compliance |
| • Shop Drawings | • Lab Test Reports |
| • LEED Certificates | • Trade License |
| • Civil Defense documents | • Method of Statements |
| • Previous Approvals | • Executed Projects |

OUR PROJECTS



Aramco Stadium



NEOM Green
Hydrogen Project



Fadelah Substation



Waly Alahad
Substation



Hamdaniya
Substation



Al Manfoha
Substation



Jubail 1 & 2



Construction of
Jafurah



Construction of
Mowaih PV



Hilton Inn Hotel,
Al Ahsa



MISK-Ilmi



Retal Rise and
Nobu Hotel

KRON & DONPCRANES IN SAUDI ARABIA

At Kron Company, we are proud to be the official agent for DONPCRANES, a global leader in advanced material handling solutions.

Serving industries across Saudi Arabia, we provide state-of-the-art cranes, hoists, and lifting devices engineered with European technology to ensure safety, efficiency, and reliability in every lifting operation.

Whether you're in manufacturing, steel, automotive, paper production, shipbuilding, or oil & gas, our solutions are designed to make material handling safer, easier, and smarter.

OILFIELD SUPPORT SERVICES

We are proud to have exclusive Agency to International technology developers and service providers. Our team consists of experienced industry specialists

CEMENTING & CASING ACCESSORIES

We work closely with Major Oil and Gas services providing cementing & casing accessories OEM with competitive prices

WITH EXPERTISE IN CHEMICAL & PETROCHEMICAL INDUSTRIES

KRON Oilfield Service Company plays an integral role in the petrochemical and chemical industry. Over the years, our experienced engineers have gained extensive knowledge and are proud of their track record of success stories with partners from all over the Kingdom of Saudi Arabia.

CERTIFICATIONS ON APPROVAL

aramco



Saudi Aramco
P.O. Box 11625
Dammam 31421
Saudi Arabia

September 15, 2023
Letter Cst # SGT-028-23

INTERNATIONAL CARBIDE TECHNOLOGY CO LTD
No. 176, ZHONGZHU STREET, LUZHU DISTRICT,
TAIYUAN CITY, 33842
TAIWAN, R.O.C.

Subject: Plant Approval Letter for Sourcing Purposes

Survey/Assessment Desk Review Date (as for sourcing purpose)
November 23/03/2023 and March 26, 2023 (Following Desk Review)
Reference: Manufacturer ID: **1011202**, Plant ID: **3001212**
Vendor ID: Data Handling Unit: **1011202 INTERNATIONAL CARBIDE TECHNOLOGY CO.LTD**

Dear Sirs,

As a result of the **Survey and Follow-up Desk Review** conducted by Aramco Asia Quality Management and Saudi Aramco Technical Assistance Department for the sale of sourcing purposes, Aramco Asia Japan K.K. (AAJ) is pleased to inform you that your company is **APPROVED** in the Saudi Aramco Sourcing Information System to supply commodities as per the attached Commodity Classification Codes (CCMCOs) (see Attachments), provided your company continues to maintain Saudi Arabian and Saudi Aramco standards.

This approval is granted for your manufacturing plant, **INTERNATIONAL CARBIDE TECHNOLOGY CO LTD**,
No. 176, ZHONGZHU STREET, LUZHU DISTRICT, TAIYUAN CITY, 33842,
TAIWAN, R.O.C.

This approval, however, should not be construed as a commitment by the Saudi Aramco enterprise to purchase from you; however, your company will have the opportunity along with other approved entities to respond to requests for submitting proposals in accordance with established policies and procedures.

AAJ would like to thank this opportunity to thank you for your interest in doing business with the Saudi Aramco enterprise. Please use the above referenced vendor ID and Plant ID in all future written correspondence.

Sincerely yours,

1992.1/0203
Abdul A. Almarho
Deputy Managing Director
Strategic Procurement and Logistics Department
Aramco Asia Japan K.K.

It is the responsibility of the manufacturer to notify Aramco Asia Japan K.K. Supply Relations Coordinator of any Changing or Replacement:
A. Change of Registration Number.
B. Change of Name of the Supplier or Subcontractor of origin component.
C. Discontinuation of Production of approved Materials.

OUR PARTNERS



TESTED, LISTED & CERTIFIED



OUR CLIENTS



info@kron.sa



Balhamer Business Gate Tower
AshShati AshSharqi Dammam
Kingdom of Saudi Arabia

Contact us
01381 61558

