

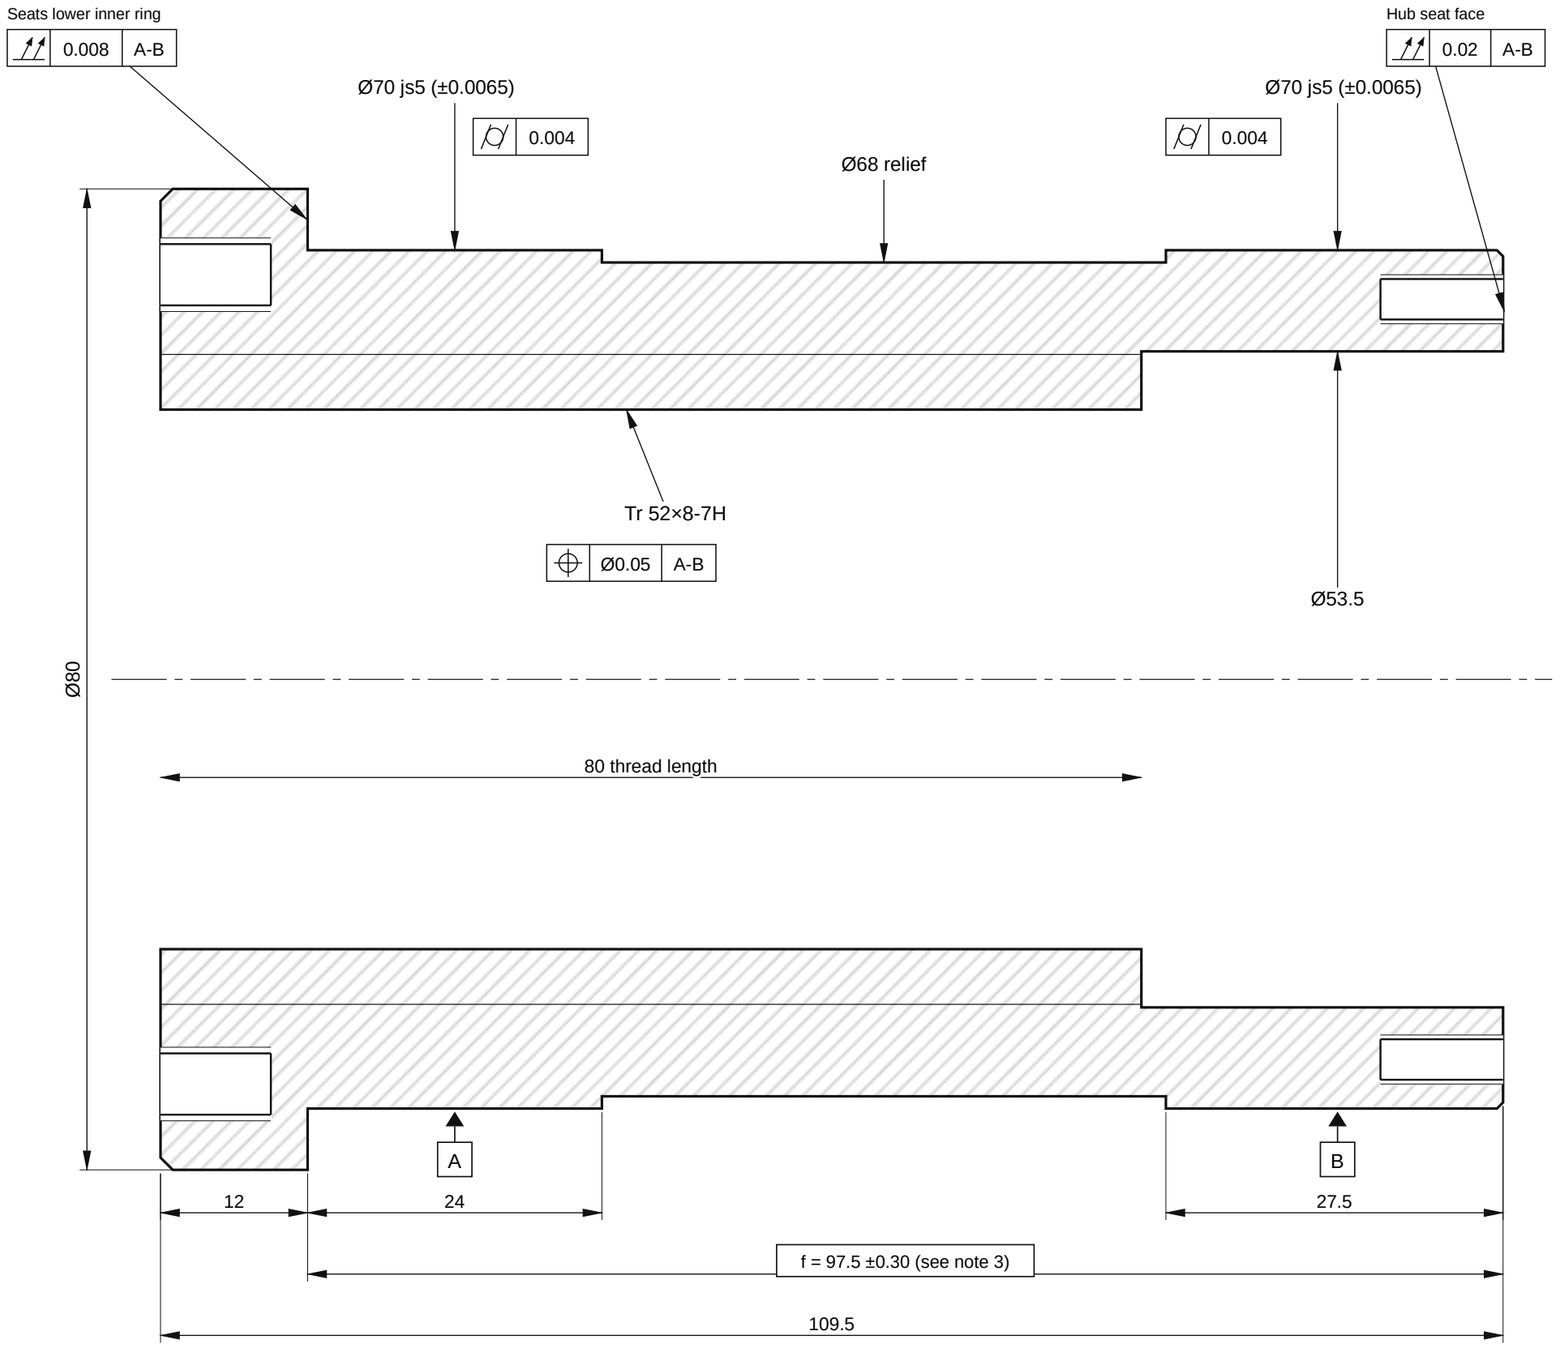


SECTION A-A Scale 2:1

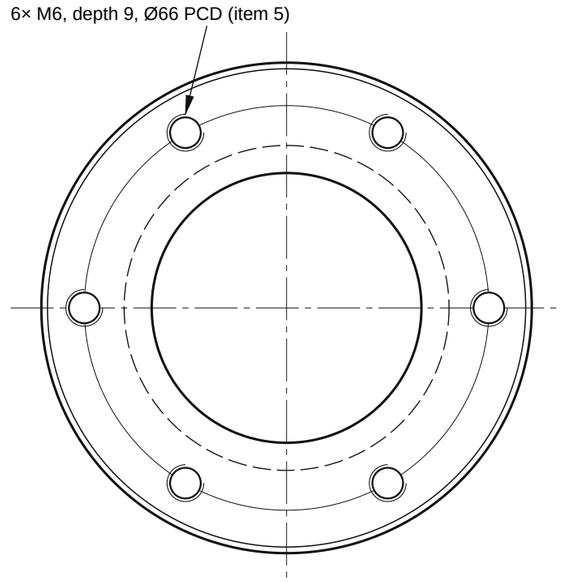

VIEW FROM FLANGE SIDE Scale 1:1

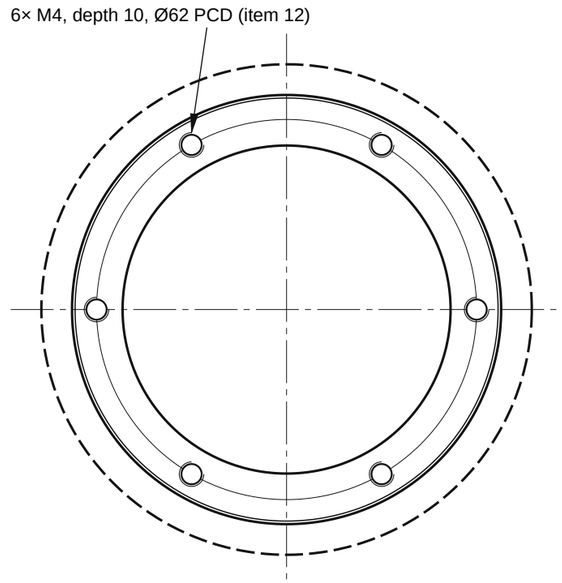

VIEW FROM HUB SIDE Scale 1:1

REV	DESCRIPTION	DATE
A	First issue, clamp length from MB-007	2026-11-08

NOTES

1. Material CuSn12-C-GC (EN 1982). Item 2 of assembly MB-005.
2. Thread Tr 52×8-7H to ISO 2901/2903. Bearing seats Ø70 js5, Ra 0.8; thread flanks Ra 1.6; flange and end faces Ra 0.8.
3. Clamp length f = 97.5, from tolerance stack-up MB-007: shim ground at assembly, target preload δ = +0.020.
4. Fillet at flange face R0.8 max (7014 chamfer 1.1 min).
5. Pulley (item 12) must be made with bore Ø54 and a Ø80 hub flange bolted to the end face. Torque at nut 1.7 N·m.
6. Tapped holes: 6× M6 receive safety nut item 5; 6× M4 receive the pulley hub.
7. General tolerances ISO 2768-mK. Dimensions in mm.

Material: CuSn12-C-GC	Standards: ISO 2901, ISO 1101	ISO 2768-mK	Mass: ~1.9 kg
Scale: 2:1 (views 1:1)	Tolerancing principle: ISO 8015	Designed by Mahdi Bachraoui, 2026-11-08	Checked by: -
Document type: Part drawing	Rotating nut Vertical axis MB-005, item 2		Format: A3
Drawing Number: MB-005-02			Rev A Sheet 1/1