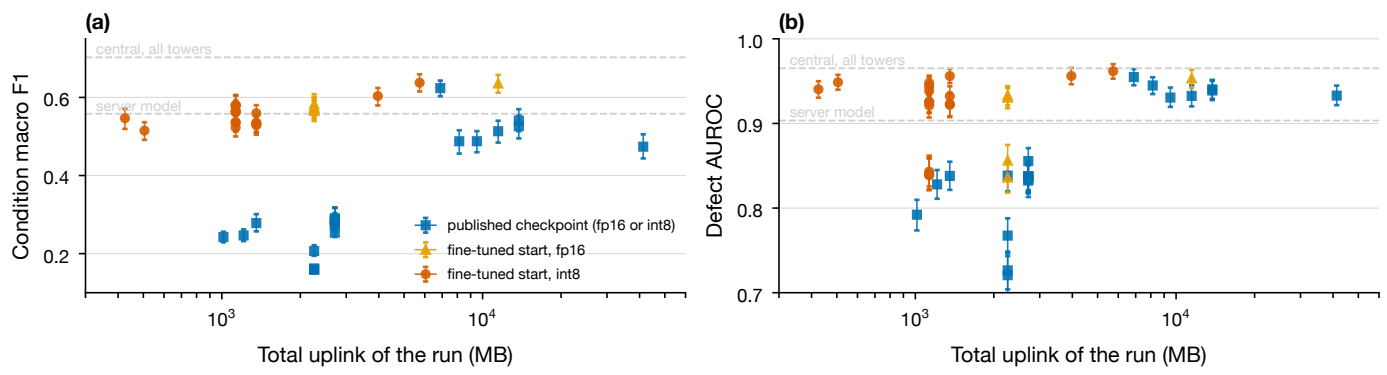
(a)
central, all towers
server model
Condition macro F1
0.6
0.4
0.2
published checkpoint (fp16 or int8)
fine-tuned start, fp16
fine-tuned start, int8
10^3
10^4
Total uplink of the run (MB)
(b)
central, all towers
server model
Defect AUROC
1.0
0.9
0.8
0.7
10^3
10^4
Total uplink of the run (MB)