

# Early Analysis of Ambient Systems SysML Properties using OMEGA2-IFx

Manzoor Ahmad<sup>1</sup>, Iulia Dragomir<sup>1</sup>, Jean-Michel Bruel<sup>1</sup>, Iulian Ober<sup>1</sup> and Nicolas Belloir<sup>2</sup>

<sup>1</sup>*IRIT, Université de Toulouse, France*

<sup>2</sup>*LIUPPA, Université de Pau et des Pays de l'Adour, France*  
{ahmad,dragomir,bruel,iulian.ober}@irit.fr, belloir@univ-pau.fr

## Keywords:

Requirements, Formal Methods, Properties Verification, Observers, RELAX, Simulation, OMEGA2, IFx

## Abstract:

Formal methods provide tools to verify the consistency and correctness of a specification with respect to the desired properties of the system. This verification is important as the development of an AAL (Ambient Assisted Living) system involves different technologies (medical services, surveillance cameras, intelligent devices, etc.) requiring a strong consistency checking between models. We illustrate in this paper how we prove some of the properties of the system before the development even starts. To model the AAL system, we use the SysML language. In terms of tools, we use Rational Rhapsody in combination with the OMEGA2 profile which is an executable UML/SysML profile used for the formal specification and validation of critical real-time systems. This profile is supported by the IFx toolset which provides mechanisms for the model simulation and properties verification of the AAL system.

## 1 INTRODUCTION

Ambient Assisted Living (AAL) systems are dedicated to help people with limited capabilities in their life. This kind of systems, and more specially all Ambient Systems are highly adaptive. They modify their behavior at run-time in response to changing environmental conditions. For these systems, Non Functional Requirements (NFRs) play an important role, and one has to identify as early as possible the requirements that are adaptable. The distributed nature of these systems and changing environmental factors makes it difficult to anticipate all the explicit states in which the system will be during its lifetime. As such, they need to be able to tolerate a range of environmental conditions and contexts, but the exact nature of these contexts remains imperfectly understood.

In this context, we focus on two types of system properties for our AAL case study: RELAXed and Invariant. These requirements are obtained by applying a process called RELAX (Whittle et al., 2009) on traditional requirements. RE-

LAX is a requirement engineering language for self-adaptive systems that incorporates uncertainty into the specification of these systems. Our objective is to prove these properties earlier as possible in the specification cycle.

On the other hand, formal methods<sup>1</sup> are intended to systemize and introduce rigor into all the phases of software development. This helps us to avoid overlooking critical issues, provides a standard means to record various assumptions and decisions, and forms a basis for consistency among related activities. By providing precise and unambiguous description mechanisms, formal methods facilitate the understanding required to coalesce the various phases of software development into a successful endeavor.

In this paper we assess the use of formal methods for modeling and verification of AAL systems. We use the OMEGA2-IFx approach which has been applied for the verification and validation of industry-grade models (Dragomir et al., 2012) providing interesting results. The OMEGA2 UML/SysML Profile (Ober and Dragomir, 2010)

---

<sup>1</sup><http://www-2.cs.cmu.edu/~svc/>

defines the semantics of UML/SysML elements providing the means to model coherent and unambiguous system models. In order to make the models verifiable, it presents as extension the *observer* mechanism for specifying dynamic properties of models. The OMEGA2 UML/SysML Profile is implemented by the IFx Toolbox (Ober et al., 2006) which provides static analysis, simulation and timed-automaton based model checking (Clarke et al., 1999) techniques for validation.

This paper takes the reader a step forward and enriches our existing work by integrating formal methods for the verification of NFRs and specially RELAX-ed requirements.

**Paper structure.** This paper is organized as follows: Section 2 presents other approaches defined for the verification of AAL models, Section 3 introduces the OMEGA2 UML/SysML Profile and the IFx Toolbox that are used for modeling and properties verification, Section 4 describes the case study: its specification, system architecture and behavior, Section 5 presents the properties, the AAL system has to satisfy, while Section 6 presents the verification and simulation results, Section 7 concludes the paper and highlights the future work.

## 2 Related work

The specification and verification of NFRs in the early stages of the AAL development cycle is a crucial issue (Benghazi et al., 2009). These systems require clear and precise specifications in order to describe the system behavior and its environment. The formal specification of the system behavior supported by mathematical analysis and reasoning techniques improve their development process and enable the verification of these systems.

(Nehmer et al., 2006) present a verification approach based on MEDISTAM-RT which is a methodological framework for the design and analysis of real-time systems and timed traces to check the fulfillment of non-functional requirements. They focus on safety and timeliness properties, to assure the correct functioning of AAL systems and to show the applicability of this methodology in the context of this kind of systems.

(Apvrille et al., 2006) introduce a profile named TURTLE (Timed UML and RT-LOTOS Environment). With its formal semantics given

in RT-LOTOS and its toolkit, TURTLE enables a priori detection of design errors through a combination of simulation and verification/validation techniques. By simulation the authors mean a partial exploration of the system state space. It is often used for debugging purposes and to quickly increase confidence in a design. For finite state space systems, exhaustive analysis is also possible. Verification relies on the exploration of the whole system state space in order to prove absence of deadlocks for instance and other general properties that should be satisfied by any system.

UPPAAL<sup>2</sup> is a tool box for validation (via graphical simulation) and verification (via automatic model-checking) of real-time systems. It consists of two main parts: a graphical user interface and a model-checker engine. The idea is to model a system using timed automata, simulate it and then verify properties on it. Timed automata are finite state machines with time (clocks). A system consists of a network of processes that are composed of locations. Transitions between these locations define how the system behaves. The simulation step consists of running the system interactively to check that it works as intended. Then the verifier check the reachability properties, i.e., if a certain state is reachable or not.

## 3 THE VERIFICATION TOOLS

In this section, we introduce the OMEGA2 Profile which we used for modeling the AAL system and its properties and the IFx toolset used for the verification and simulation of these properties.

### 3.1 The OMEGA2 UML/SysML Profile

OMEGA2 is an executable UML/SysML profile dedicated to the formal specification and validation of critical real-time systems. It is based on a subset of UML 2.2/SysML 1.1 containing the main constructs for modeling system structure and class/block behavior and which provides a clear and coherent operational and timed semantics.

The architecture of an OMEGA2 model is described in Class/Block Definition Diagrams

---

<sup>2</sup><http://www.it.uu.se/research/group/darts/uppaal>

by classes/blocks with their relationships (association, generalization and composition) and their interfaces. Each class/block defines properties and operations, as well as a state machine. The hierarchical structure of a model is defined in composite structures/Internal Block Diagrams: parts that communicate through ports and connectors. The UML/SysML Profile leaves open several semantic variation points for which OMEGA2 defines a set of well-formedness rules that result in a strong typing language. For further details on the rules, their rationale and formalization, the reader is referred to (Ober and Dragomir, 2011).

The behavior of a system is given by the modeled state machines that use asynchronous operation calls and signal outputs for communication. The profile owns a textual action language compatible with UML 2.2 action metamodel from which implements the main constructs: object creation/destruction, expression evaluation, variable assignment, signal output and control flow structuring statements.

The operational semantics of OMEGA2 relies on an asynchronous timed execution model. Each class/block is represented by a timed input/output automata, potentially executing in parallel with other blocks and communicating via asynchronous operation calls and signals.

The OMEGA2 Profile can model timed behavior, where the model time base can either be discrete or continuous and it is specified by the user at verification. The time model is controlled by primitives from automata with urgency (Bornot and Sifakis, 2000): clocks, time guards and transition urgency annotations. The *clock* is represented by a *Timer* block on which we can perform actions as: *set* for setting the clock a delay and *reset* to restore the clock to 0. Time guards are either described as inequalities or specified via the *timeout* operation that verifies that a certain delay has elapsed. With respect to time progress, transitions can also define a particular semantics based on their stereotype: *eager* defines that time progress is disabled in a state (i.e., the actions on a transition are executed as soon as possible), *delayable* means that the time progress is enabled but it is bounded by a limit and *lazy* specifies that time progress is enabled and unbounded (i.e. time can progress to infinity). Based on these notions, one can also model synchronous communication in OMEGA2 model.

For specifying and verifying dynamic properties of models, OMEGA2 uses the notion of

*observers*. *Observers* are special classes/blocks monitoring run-time state and events. They are defined by classes/blocks stereotyped with `<<observer>>`. They may have local memory (attributes) and a state machine describes their behavior. States are classified as `<<success>>` and `<<error>>` states to express the (non)satisfaction of safety properties. The main issue in modeling observers is the choice of events which trigger their transitions, and which must include specific UML/SysML event types. One can observe:

- Events related to signal exchange: `send`, `receivesignal`, `acceptsignal`.
- Events related to operation calls: `invoke`, `receive` (reception of call), `accept` (start of actual processing of call – may be different from `receive`), `invokereturn` (sending of a return value), `receivereturn` (reception of the return value), `acceptreturn` (actual consumption of the return value).
- Informal events explicitly specified by the modeller using the informal action.

The trigger of an observer transition is a `match` clause specifying the type of event (e.g., `receive`), some related information (e.g., the operation name) and observer variables that may receive related information (e.g., variables receiving the values of operation call parameters). Besides events, an observer may access any part of the state of the UML model: object attributes and state, signal queues.

### 3.2 IFx Toolset

OMEGA2 models can be simulated and properties can be verified using the IFx toolset (Bozga et al., 2004). The following terminology is used:

**Verification:** It designates the automatic process of verifying whether an OMEGA2 UML/SysML model satisfies (some of) the properties (i.e. *observers*) defined on it. The verification method employed in IFx is based on systematic exploration of the system state space (i.e., enumerative model checking).

**Simulation:** It designates the interactive execution of an OMEGA2 UML/SysML model. The execution can be performed step-by-step, random, or guided by a simulation scenario (for example an error scenario generated during a verification activity).

The IFx toolset relies on a translation of UML/SysML models towards a simple specifica-

tion language based on an asynchronous composition of extended timed automata, the IF language<sup>3</sup>. The translation takes an input model in XMI 2.0 format.

The compiler verifies the set of well-formedness rules imposed by the profile and generates an IF model that can be further reduced by static analysis techniques. This model is subject to verification that either validates the model with respect to its properties or produces a list of error scenarios that can be further debugged using the simulator. The overall workflow of IFx Toolset is shown in Fig. 1 (Verimag and Irit, 2011).

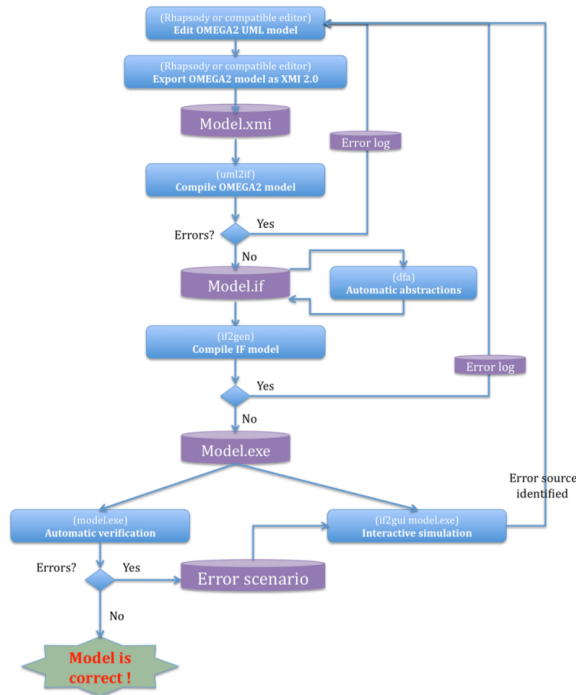


Figure 1: IFx Workflow(Verimag and Irit, 2011).

## 4 MODELING THE AAL SYSTEM WITH OMEGA2 PROFILE

In this section, we explore the AAL system specification, the system architecture showing its structural and behavioral diagrams i.e. its block definition diagram, internal block diagrams and state machine diagrams.

### 4.1 System Specification

Here is an excerpt of the AAL case study (Whittle et al., 2009): *Mary is a widow. She is 65 years old, overweight and has high blood pressure and cholesterol levels. Following her doctors instructions, she is considering to loose weight. The doctor has recommended a hypo caloric diet with low levels of salt. She lives by herself in an AAL house.*

In this paper, we only consider the interaction of the **Patient** with the **Fridge** for calculating the daily calories intake of the **Patient**. First, we start by taking into account the structural part of the AAL system. We consider those parts that are concerned with the daily calories intake of the **Patient** in the AAL house. The AAL system is composed of **Fridge** and **Patient**. We would like to model these parts and the interaction that takes place between them. The **Fridge** partially contributes to the minimum liquid intake of the **Patient**; it also looks at the calories consumption of the **Patient** as he/she does not need to exceed it after a certain threshold.

### 4.2 System Architecture

Fig. 2 shows the main internal block diagram. The important parts of the AAL system are **Patient** and **Fridge**. A **Fridge** in turn is composed of **Food**, **Display**, **Alarm** and **Controller** blocks. The **Food** block contains information about the food items in the **Fridge**, the calories contained by each item, the total number of calories the **Patient** has accumulated and the calories threshold that should not be surpassed. The fridge **Display** is used to show the amount of calories consumed by the **Patient**. The **Alarm** is activated in case the **Patient**'s calories level surpasses a certain threshold. The **Controller** transfer the information from the **Patient** to the concerning elements and back to the environment.

The communication between different blocks takes place through ports. A port bears a type. In OMEGA2, the type of a port must be an Interface. The type specifies the set of requests (operation calls and/or signals) that are transferred between parts (components) by means of ports and connectors. In Fig. 2, the **Patient** block has a standard port named **pToFridge**. This port has a contract named **Patient2Fridge** and is acting as a provided interface of the **Patient** block. The interface **Patient2Fridge** defines an operation

<sup>3</sup><http://www-if.imag.fr/>

`eat(int item, int quantity)`. This interface is then used as a type of `pToFridge` port. At the same time the `Patient` block has a required interface named `pFromPatient`. For the full system architecture, the reader is referred to (Ahmad and Dragomir, 2013).

Rational Rhapsody Developer v7.5.2<sup>4</sup> is used to create OMEGA2 models. OMEGA2 models use a profile and a predefined library provided with the tool (OMEGA2.sbs and OMEGA2Predefined.sbs). Any other UML2.2 or SysML1.1 editor supporting profiling and exporting in the XMI2.0 standard compatible with Eclipse ecore can be used for OMEGA2 models.

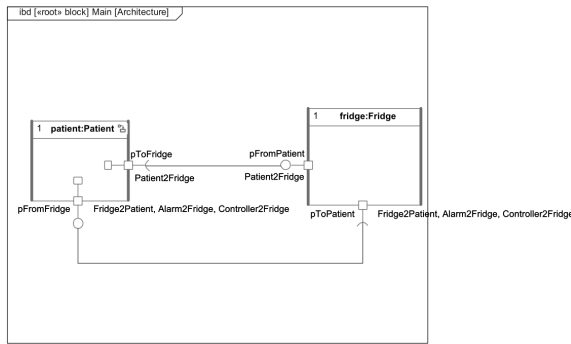


Figure 2: Main Internal Block Diagram.

The `Fridge` interacts with the AAL system. Fig. 3 shows the internal block diagram for the `Fridge` block. Each of the four blocks behaviors is modeled in a separate state machine diagram.

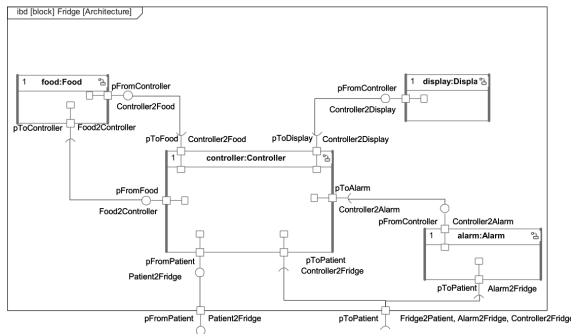


Figure 3: Fridge Internal Block Diagram.

Fig. 4 shows the state machine diagram for the `Patient` block. Here the exchange of information between `Patient` and `Fridge` takes place. We identify the number and quantity of each item present in the `Fridge`. If a certain product still present in the `Fridge` is chosen by the `Patient` then the information is communicated with the

`Fridge`. Otherwise the `Fridge` is empty and the `Patient` will wait to be refilled. Also, if the `Alarm` of the `Fridge` is raised due to high intake of calories, the `Patient` stops eating and waits for the system to be unblocked.

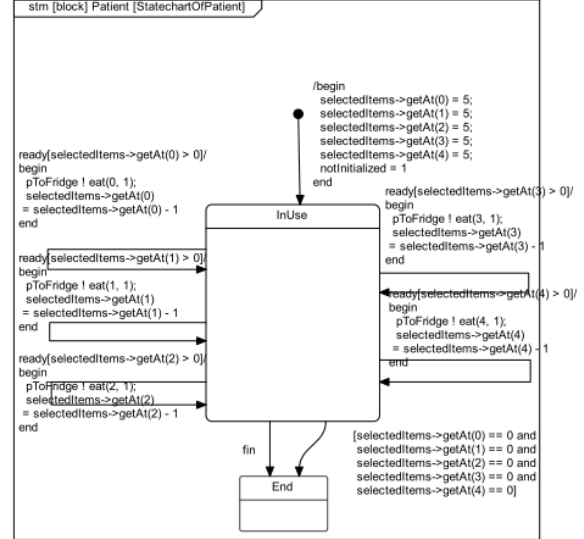


Figure 4: Patient State Machine Diagram.

The `Food` block models the knowledge of the `Fridge` about what it contains. We define the number of items and the amount of calories associated with each item present in the `Fridge`. We then calculate the total number of calories accumulated by the `Patient`. If the total number of calories is greater or equal to the maximum calories allowed for the `Patient`, then a message is sent and the alarm is raised or if the total number of calories is greater than the maximum calories allowed minus 500, then the `Patient` is warned with a message that the calories level is approaching the maximum amount of calories allowed.

## 5 PROPERTIES VERIFICATION OF AAL SYSTEM

The properties of AAL system that we modeled and verified are obtained after RELAX process is applied on its traditional requirements. RELAX is a requirement engineering language for self-adaptive systems that incorporates uncertainty into the specification of these systems. Typical textual requirements prescribe behavior using a modal verb such as **SHALL** that defines functionality that a software system must always provide. For self adaptive systems such as AAL,

<sup>4</sup><http://www.ibm.com/developerworks/rational/>

however, environmental uncertainty may mean that it is not always possible to achieve all of those SHALL statements; or behavioral uncertainty may allow for trade-offs between SHALL statements to RELAX non-critical statements in favor of other, more critical ones. Therefore, RELAX identifies two types of requirements: one that can be RELAX-ed in favor of other ones called variant or RELAX-ed and other that should never change called invariant. Below are the properties to be verified.

## 5.1 Traditional/Relax-ed Requirement

Following is the traditional requirement that we have transformed into a RELAX-ed requirement.

- The fridge shall detect and communicate with food packages

RELAX-ed version of this requirement is as follows:

- Property 1: The fridge SHALL detect and communicate information with AS MANY food packages AS POSSIBLE

Below are the uncertainty factors associated with the given RELAX-ed requirement.

**ENV:** Food locations, food item information (type, calories), food state (spoiled and un-spoiled)

**MON:** RFID readers, Cameras, Weight sensors

**REL:** RFID tags provide food locations and food information; Cameras provide food locations (Cameras provide images that can be analyzed to estimate food locations), Weight sensors provide food information (whether eaten or not)

The satisfaction of this requirement contributes to the balanced diet of the **Patient**. We would like to verify this property as it is important for the AAL system to know about as many food items as possible present in the **Fridge**. Fig. 5 shows the state machine diagram of the Property 1. To start with, the number of items consumed by the **Patient** and the total number of items in the **Fridge** are identified. Then we verify the identity of the **Patient**, if the person is identified as the **Patient**, then we calculate the number of items consumed. We then calculate the number of items left in the **Fridge** which is equal to the sum of all the items present in the **Fridge**. In the last step, we calculate if

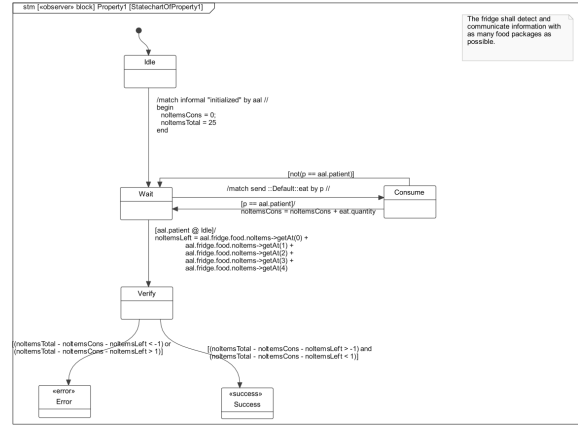


Figure 5: Property1 State Machine Diagram.

((total number of items - number of items consumed - number of items left) > -1) and ((total number of items - number of items consumed - number of items left) < 1), it means that we have reached the <<success>> state by having information about all the items present in the **Fridge**, i.e. it should be 0. Inversely, if it is less than -1 and greater than 1, then it means that we are missing information about some of the items present in the **Fridge** and the *observer* passes into the <<error>> state.

## 5.2 Invariant Requirement

Here is the invariant requirement that we verified.

- Property 2: The alarm SHALL be raised instantaneously if the total number of calories surpasses the maximum calories allowed for the patient

Fig. 6 shows the state machine diagram of the property 2. This requirement implies that the Alarm shall be immediately raised as soon as the total number of calories equals or surpasses the maximum calories allowed for the **Patient**. If it happens then the **Patient** should stop eating.

## 6 Verification Results

Till now, we have modeled the AAL system and the properties to be verified on the model. It is now time to verify these properties and in case if there is an error, simulate it to find the error and then correct it in the model. The AAL2 model is first exported into AAL2.xmi and then using the IFx toolset the AAL2.xmi is compiled into AAL2.if as shown in Fig. 7.

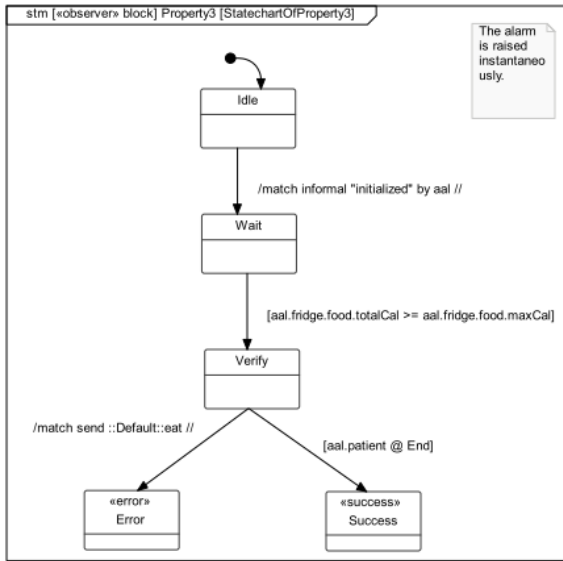


Figure 6: Property2 State Machine Diagram.

```
[ahmad@topcased ~]$ uml2if -sysml -rhapsody -rhplang -eager AAL2.xmi
uml2if (OMEGA2) v2.0.1 (c) Verimag,IRIT 2009-2011
Analyzing input.
Please wait...
Success
Generated...
Preprocessed...
Indented...
Done.
[ahmad@topcased ~]$
```

Figure 7: XMI to IF Compilation.

The AAL2.if is then compiled into an executable file i.e. AAL2.x. For the properties verification part, we run the model-checker on the AAL model which found several error scenarios in the AAL model. Any of the error scenario can then be loaded through the interactive simulation interface of the IFx toolset to trace back the error in the model and correct it.

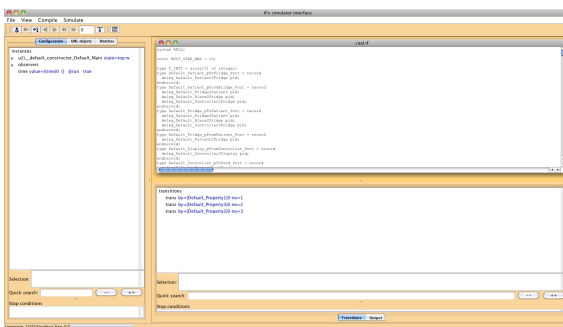


Figure 8: Initial Simulation Interface.

In order to debug a model, first we import it into the simulator as shown in Fig. 8. We check the states of the *observers* in order to identify which property has not been satisfied. One can observe in Fig. 9 that Property 2 fails. While checking the state of the entire system for this

property, we discover that the error state contained the maximum allowed number of calories for the total number of calories consumed and subsequently eat requests sent by the *Patient*. This implies that the Alarm function of the intelligent *Fridge* doesn't function properly. The Alarm function of the *Fridge* is strictly linked to its Food process and the Alarm is raised only if the total number of consumed calories is strictly superior than the maximum allowed; condition which doesn't satisfy the request that the Alarm is raised as soon as possible. The correction consists in raising the Alarm in case the total number of consumed calories is equal to the maximum allowed threshold. Once this error is corrected the verification succeeds.

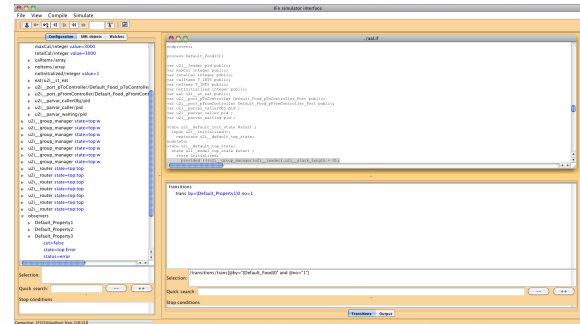


Figure 9: Error State Food Observer Simulation Interface.

```
[ahmad@topcased ~]$ ./AAL2.x -dfs -po -me -ce 1n
01:46:03 17058583/s 42971642/t 179/d
```

Figure 10: Model checking successful.

Fig. 10 shows the result of the model-checker on the correct model.

## 7 Conclusion

We have modeled the structural and behavioral parts of an AAL (Ambient Assisted Living) system. The modeling is done using Rational Rhapsody 7.5.2 with OMEGA2 profile which is used for specification and verification of dynamic properties of models through *observers*. *Observers* are special classes/blocks monitoring run-time state and events. They are defined by classes/blocks stereotyped with <<observer>>. For the verification and simulation part, we have used IFx which is a toolset used for the simulation of OMEGA2 models and the verification of properties defined on these models. We have verified two properties of the AAL system using the IFx toolset. At first,

the verification results in errors which can then be simulated through the interactive simulation interface of the IFx toolset in order to identify the source of the error and then subsequently correct it in the model. After correcting the error in the model, the verification results in the fulfillment of all the two properties.

The future work is centered around the use of formal methods in the context of our integrated approach (Bruehl et al., 2009). In (Ahmad et al., 2012), we have investigated the use of goal oriented concepts in combination with RELAX for modeling the requirements of ambient systems. We have found a link between RELAX and SysML/KAOS (Gnaho and Semmak, 2010), which is a goal oriented approach based on KAOS and which extends the SysML meta-model with goal concepts. Based on that, we have concluded that these two approaches are complementary with each other and RELAX can benefit from the **ContributionNature** and **ContributionType** concepts of SysML/KAOS.

This work motivated us to take benefit from the OMEGA2/IFx. In our integrated approach, we are interested in RELAX-ed requirement which we obtain by using the RELAX process. We then refine the RELAX-ed requirement with the **ContributionType** and **ContributionNature** concepts of SysML/KAOS, the reader is referred to (Ahmad et al., 2012) for an insight on our work on RELAX and SysML/KAOS. The RELAX requirement is then verified by a test case and then the test case can be refined by observer and then observer is allocated to a state machine diagram. This whole sequence of steps constitute our process.

## REFERENCES

- Ahmad, M., Bruehl, J. M., Laleau, R., and Gnaho, C. (2012). Using relax, sysml and kaos for ambient systems requirements modeling. In *The 3rd International Conference on Ambient Systems, Networks and Technologies (ANT '12)*. Elsevier Procedia Computer Science, Volume 10, Pages 474 - 481.
- Ahmad, M. and Dragomir, I. (2013). Ambient assisted living system properties modeling and verification using omega2/ifx, internal report university of toulouse france.
- Apvrille, L., de Saqui-Sannes, P., and Khendek, F. (2006). Turtle-p: a uml profile for the formal validation of critical and distributed systems. In *Software and Systems Modeling (SSM '06)*. Springer, Volume 5, Issue 4, pp 449-466.
- Benghazi, K., Hurtado, M. V., Rodríguez, M. L., and Noguera, M. (2009). Applying formal verification techniques to ambient assisted living systems. In *OnTheMove Workshop (OTM '09)*. Springer-Verlag Berlin Heidelberg 2009.
- Bornot, S. and Sifakis, J. (2000). An algebraic framework for urgency. In *Information and Computation (IC '00)*. Elsevier, Volume 163, Issue 1, Pages 172-202.
- Bozga, M., Graf, S., Ober, I., Ober, I., and Sifakis, J. (2004). The if toolset. In *Formal Methods for the Design of Real-Time Systems (FMDRTS '04)*. Springer Berlin/Heidelberg.
- Bruehl, J. M., Belloir, N., and Ahmad, M. (2009). Un profile sysml pour les systèmes auto-adaptatifs. In *15ème Colloque National de la Recherche en IUT (CNRIUT '09)*.
- Clarke, E. M., Grumberg, O., and Peled, D. A. (1999). *Model Checking*. MIT Press, London.
- Dragomir, I., Ober, I., and Lesens, D. (2012). A case study in formal system engineering with sysml. In *17th International Conference on Engineering of Complex Computer Systems (ICECCS '12)*. IEEE.
- Gnaho, C. and Semmak, F. (2010). Une extension sysml pour l'ingénierie des exigences non-fonctionnelles orientée but. In *Ingénierie des Systèmes d'Information*. Lavoisier Paris FRANCE.
- Nehmer, J., Becker, M., Karshmer, A., and Lamm, R. (2006). Living assistance systems: an ambient intelligence approach. In *Proceedings of the 28th international conference on Software engineering (ICSE '06)*. ACM.
- Ober, I. and Dragomir, I. (2010). Omega2: A new version of the profile and the tools. In *15th International Conference on Engineering of Complex Computer Systems (ICECCS '10)*. IEEE.
- Ober, I. and Dragomir, I. (2011). Unambiguous uml composite structures: The omega2 experience. In *Theory and Practice of Computer Science (SOFSEM '11)*. Springer, Volume 6543, pp 418-430.
- Ober, I., Graf, S., and Ober, I. (2006). Validating timed uml models by simulation and verification. In *International Journal on Software Tools for Technology Transfer (STTT '06)*. Springer, Volume 8, Issue 2, pp 128-145.
- Verimag and Irit (2011). *OMEGA2-IFx for UML/SysML v2.0, Profile and Toolset, User Manual Document v1.1*.
- Whittle, J., Sawyer, P., Bencomo, N., Cheng, B. H. C., and Bruehl, J. M. (2009). Relax: Incorporating uncertainty into the specification of self-adaptive systems. In *17th International Requirements Engineering Conference, RE '09*. IEEE.