

STEEL DOORS



FIRE RATED DOORS

HTC Steel Doors combine Fire Resistance with Door Functionality without compromising any aspect of both the requirements. These types of Doors reduce the Spread of Fire and enable Safe Egress, in-addition to offering highest degree of Compartmentalization. These types of Doors are highly preferred in all types of Buildings, nowadays, to offer Safe and Secure living and Egress. Our Technical Team is always available to offer advice and planning.

SIZES

Custom Sizes available (Contact our Technical Team to know more about max. available Sizes for Fire Rated Door-sets)

FIRE RATING

UL up to 120 Minutes.

BM up to 180 Minutes.

VISION PANEL



Optional (Contact our Technical Team to know more about max. available Sizes for Fire Rated Vision Panels)

LOUVERS

Optional (Contact our Technical Team to know more about max. available Sizes for Fire Rated Automatic Louver and the possibility of incorporating them)

HANDING

As per Client's requirement.

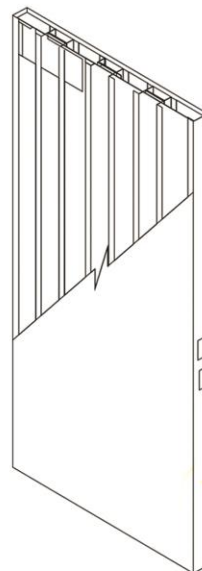

0222913113



info@htcsafety.com



www.htcsafety.com

HONEY COMB CORE

Kraft honey comb paper cores provides extreme rigidity and one of the highest flatness levels. This bonded to the face sheets with fire rated adhesive.

RECOMMENDED USE

- Interior applications
- Residential applications
- Commercial applications
- Labour camps
- Warehouses
- Government buildings

STEEL STIFFENED CORE (ROCK WOOL)

Steel Stiffened Doors provide highest durability, Insulation and Impact Resistance.

The Door Leaves consist of Steel Hat Shaped Stiffeners that extend to the full height of the Door and Spot Welded to the Leaf face-sheets. The Void Spaces between the adjacent Stiffeners are filled with Mineral Wool Infill.

RECOMMENDED USE

High Impact Applications

- Frequent Use Applications
- Utility Buildings
- Commercial Towers
- Educational Institutions
- Health Care Buildings

FINISHES

- Polyester Powder coated
- Epoxy powder coated
- Wood Finish



0222913113



info@htcsafety.com



www.htcsafety.com



Single Door



Leaf weight: 60 kg

Inside the door: iron nerves along the door

And a fire retardant rock wool filling

Density 100 kg/m³

Throat weight per single leaf: 19.5 kg

How to calculate it $(0.9 \times 2.2 \times 9850)/1000$

(9850: the density of a linear meter of iron)

Each earring has 3 right anchor

and 3 left anchor, 12 cm long for one anchor

Door Accessories

Door closer

Panic device bar

Handle lever

Rotate door

Door handles (pull and push)

Door latch

Mortise lock

Exit sign

Anchors

Electrostatic rust-resistant paint for the leaf and throat

Door colors: any color from the Ral Group



0222913113



info@htcsafety.com



www.htcsafety.com

Double Door



Double leaf weight: 60 kg per leaf, if identical

Double doors have a fixed sash with a bolt in the throat and the ground, and a movable sash

There is a curtain in the double leaf External at the edges of the leaf for tight sealing

Inside the door: iron nerves along the door

And a fire retardant rock wool filling

Density 100 kg/m³

Throat weight for double ribs: 39 kg

How to calculate it $(1.8 \times 202 \times 9850) / 1000$

(9850: the density of a linear meter of iron)

In each earring, 3 anchors to the right,

3 to the left, and 2 to the top,

with a length of 12 cm for one anchor



Door Accessories

Door closer

Panic device bar

Handle lever

Rotate door

Door handles (pull and push)

Door latch

Mortise lock

Exit sign

Anchors

Electrostatic rust-resistant paint for

the leaf and throat

Door colors:
any color from the Ral Group



0222913113




info@htcsafety.com




www.htcsafety.com

HOLLOW METAL DOOR FRAME PROFILE

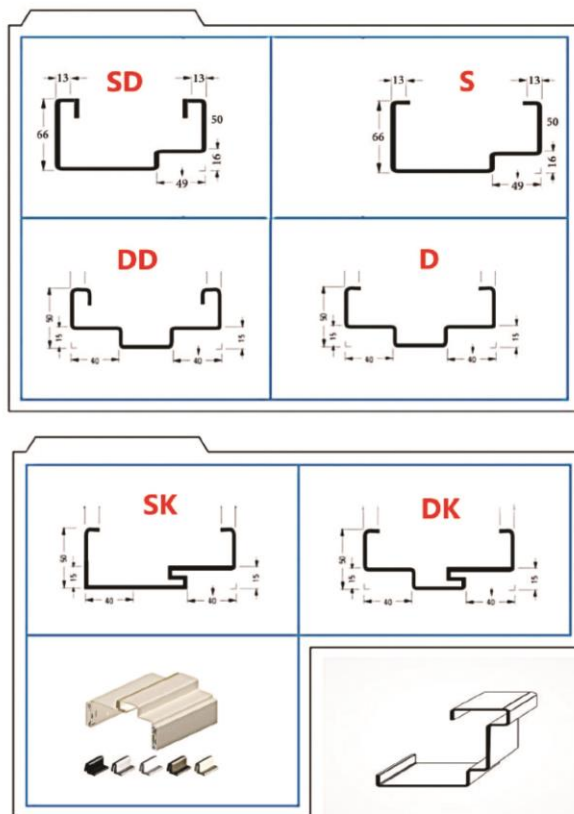

S	Single Rebate
D	Double Rebate
Sd	Single Rebate Double Architrave
Dd	Double Rebate
Sk	Single Rebate Knock Down Frame
Dk	Double Rebate Knock Down Frame

HOLLOW METAL DOOR FRAME ANCHORS


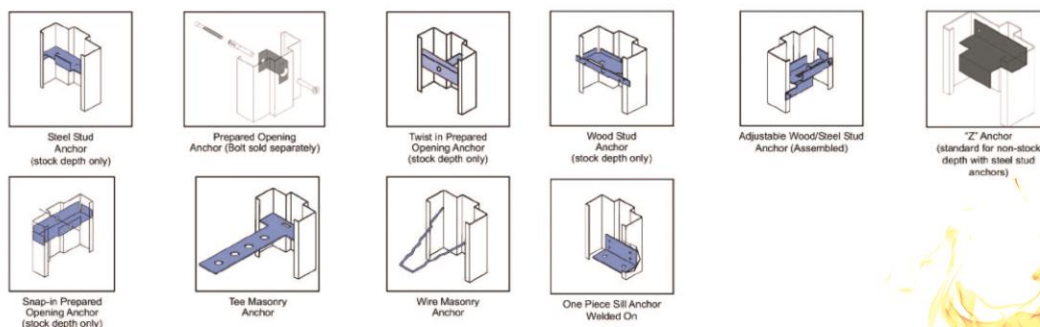


0222913113

info@htcsafety.com


www.htcsafety.com

STANDARD DOOR CLOSER

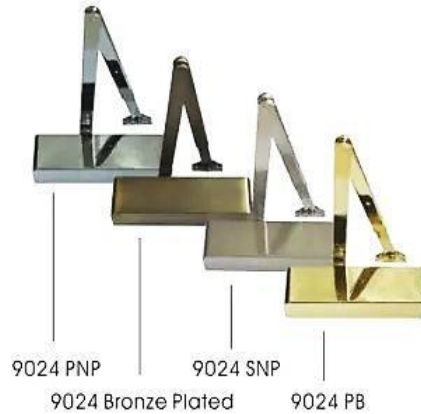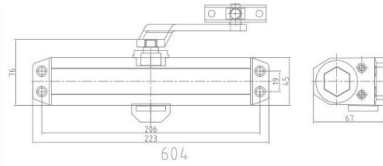

Product Name	Standard door closer
Type	Outside-mounted
Material	Die-Cast aluminum body and corrosion-resistant
Arm	Universal application, designed for standard, top
Life Cycles	500,000 Life Cycles
Color	Silver or Black by Customer Request
Installation Type	Standard
Valve	Two valve adjustment to incorporate closing and latching speed
Power Adjustable	power adjustable from size 2 to size 4
Application	Universal application as standard
Optional	Parallel arm, Back check, hold open arm, drop
Style	European & American Style Designed
Usage	Commercial & residential use, Market, Mall
Standard	EN 1154:1997+A1:202 ECM

STANDARD DOOR HINGE



No. Of Hinges Required Per Door

Door Height		No. of Hinges
Feet	Meters	
Up to 5	1.52	2
7.5	2.29	3
10	3.05	4
12.5	3.81	5
15	4.57	6

Model No.	SSA-002
Product Name	Stainless Steel Butt Hinge
Pin	Loose pin, knuckle
Bearing	2 ball bearings, For prevent door squeaking
Material	Stainless Steel 304
Finish	SS, AB, AC, PB, PVD
Size	4.5x4.0x3.0mm
Features	2 Ball Bearing, Switching Flexibility, No Noise, Long Life.
Range of Motion	270 degrees
Corners	Corners
Hole Count	8
Screw Size	Machine 1/2 x 12-24
Notes	Keep it dry and clean
Usage	Heavy-duty Metal or wooden door in commercial projects and factories


PANIC EXIT DEVICE

Thick Material / Durable / Safety




Project Hardware

Panic Exit Device Solution

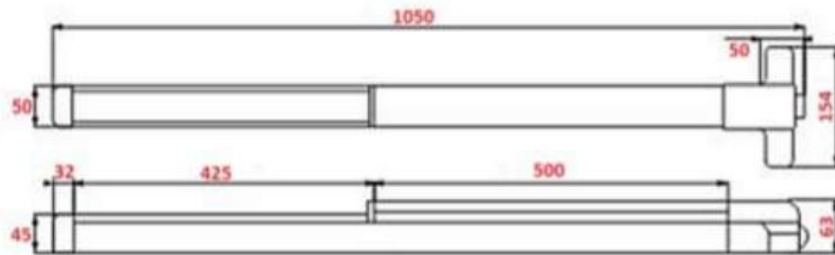

Product Name	Standard Exit Panic Bar
Type	Outside-mounted
Material	S.S OR steel paint electrostatically
Length	1000 mm Standard
Life Cycles	500,000 Life Cycles
handed	For LH / RH DOORS
DOOR WIDTH	600 - 1200 mm
durability	high 500,000 Cycles
Application	Escape Doors / Emergency Doors
Style	American Style Designed
Usage	Commercial & residential use, Market, Mall
Standard	EN 1154:1997+A1:202 ECM

STAINLESS STEEL LEVER HANDLE - H1002

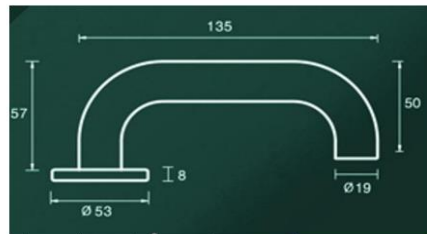

Product Name	Stainless steel lever handle in round rose II Shape
Material	Stainless steel 304
Shape	Solid Lever
Finish	SSB, SSP, Pss, PVD, Ab, AC, etc
Future	Solid Casting Molded tube, with normal round roses and
Dimension	(view illustration)
Size of rose	φ53*8
Door thickness	35 to 50mm
size of spindle	8*8*110mm
Installation Type	Surface Installation
Style	European / American Style
Usage	Door, Furniture

HTC DOOR FINISHES

HTC Special Coating System Satisfies Engineers, architects and planners most sophisticated requirements, as they constantly look for avant-garde products and work in an extremely competitive and active market. metalco doors are durable and eco friendly.

HTC doors are available in all standard special RAL colors



HTC WOOD FINISH DOORS:

HTC steel doors are shock resistant in weather and uvray proof versatile and washable and they are nature friendly without recouncing the elegance and warmth of natural wood

WIDE VARIETY OF WOOD FINISHES ARE AVAILABLE



0222913113



info@htcsafety.com




www.htcsafety.com



FIRE RATED DOORS



HTC fire rated door with lever handle SET

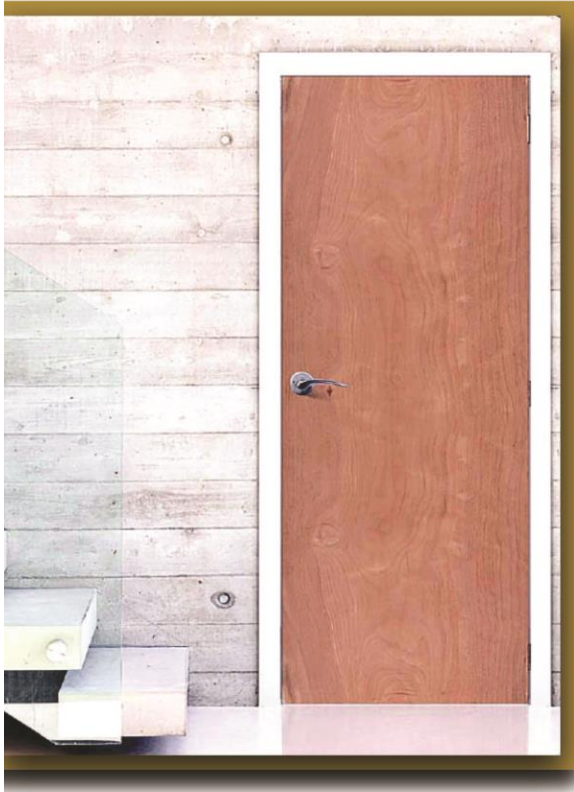

0222913113

info@htcsafety.com

www.htcsafety.com



HTC FIRERATED WITH V.P.GLASS



0222913113 info@htcsafety.com

www.htcsafety.com



ARCHITECTURAL HARDWARE



Push Plate & Pull Handle



Panic BAR



Touch Barpanic Bolt



Cylinder Turn



Lever Handle



Double cylinder



External Lever Trim



Narrowstyle Pushbar



Ball Bearing Hinges



0222913113

info@htcsafety.com

www.htcsafety.com





Door Closer With SS Cover



St. Door Closer



Consold Door Closer



Dead Lock



Roller Latch Lock



Latch Lock



Door Stope



Sash Lock



Dust Sockit



Flush Bolt



 0222913113

 info@htcsafety.com

 www.htcsafety.com