

RJ-45 Angled Face Plate Single Port, Empty, white color -Datwyler. For (Screen, Data , Tel ,Video wall and fire alarm) Outlets

Universal Faceplate 1x, 2x

wall/surface mounted

for 1 or 2 Keystone modules or 1 or 2 LCD or SCS adapter, angled outlet

BRITISH STANDARD



1

2

1 Double arc shape faceplate, angled outlet, for 2 Keystone modules
2 Double arc shape faceplate, angled outlet, for 2 fibre optic adapters

Description

Applicable for the installation of 1 respectively 2 modules with Keystone fitting (shielded or unshielded) or 1 respectively 2 LC Duplex or SC Simplex adapters.

The Keystone modules and FO adapters are easily fitted into the faceplates.

The universal module frame can be swapped or replaced from the front side.

Integrated sliding dust shutters (removable) serve as covers for unused ports (available in white, blue, yellow or red).

2 label areas: 1 in module frame (with transparent label cover), 1 on face plate cover.

Supplied with labelling strips.

Delivery without Keystone modules / FO adapters.

Application

Suitable for the following Datwyler Modules:

- RJ45 module KS-T Plus 1/8 Cat.6A shielded
- RJ45 module KU Plus 1/8 Cat.6A unshielded
- RJ45 module MS-K Plus 1/8 Cat.6A shielded
- RJ45 module KS-TS 1/8 Cat.6/EA shielded
- RJ45 module KS-T 1/8 Cat.6/EA shielded
- RJ45 module KS-T 5 1/8 Cat.5e
- RJ45 module KU-T 1/8 Cat.6 / Cat.5e unshielded

Suitable for the following Datwyler FO adapters:

- LC Duplex adapter
- SC Simplex adapter



Versions

Material number	Product	Colour	Weight [kg]	Packing unit
240641	Faceplate for 1x RJ45 Keystone module, angled, white dust covers	white	0.01 kg	1 pc.
240642	Faceplate for 2x RJ45 Keystone module, angled, white dust covers	white	0.01 kg	1 pc.

MS-K Plus 1/8 Cat.6_A (IEC)

RJ45 module, shielded, Category 6_A (IEC)

for 10-gigabit Ethernet (500 MHz)



MS-K Plus 1/8 Cat. 6A RJ45 module, shielded, with dust shutter

Description

For the transmission of digital and analogue voice, video and data signals.
The MS-K Plus RJ45 module is specified up to 500 MHz in accordance with the component standard IEC 60 603-7-51.
In combination with shielded Category 6A, 7 and 7A data cables all applications up to Class EA are applicable, that is including 10GBase-T (IEEE 802.3an).
Useable for Power over Ethernet Plus (PoE+) in accordance with IEEE 802.3at. Compact zinc die casting housing.
Special construction for high packing density in faceplates/outlets (up to 3 modules).
Tool-less wire termination. 360° braid connection to the strain relief bar.
Strain relief bar fixed with a cable tie.
With snap-in mounting in patch panels and faceplates by a special kind of Keystone fitting (180° turned).

General properties

Installation temperature	-10 °C - +60 °C
Storage temperature	-40 °C - +70 °C
Operating temperature	-20 °C - +60 °C

Electrical properties

Gbit/s	Up to 10 Gbit/s
Shielding	shielded

Mechanical properties


Connection type	IDC insulation displacement connectors
Solid copper wire	0.51 mm (AWG 24) - 0.63 mm (AWG 22)
Diameter over Insulation	0.70 mm - 1.40 mm
Re-connection	feasible when using the same or bigger wire diameter

Standards

Cabling standards	ISO/IEC 11801, EN 50173-1, TIA/EIA 568-x
Cat./Class	Cat.6 _A / Class E _A
Connector standards	IEC 60603-7-51, IEC 60512-99-001

Versions

Material number	Product	Colour	Weight [kg]	Packing unit	GTIN / EAN
440005	RJ45 module MS-K Plus 1/8 Cat.6 _A (IEC), with colour code TIA 568-A and TIA 568-B	silver	0.03 kg	10 pcs.	40393910226904

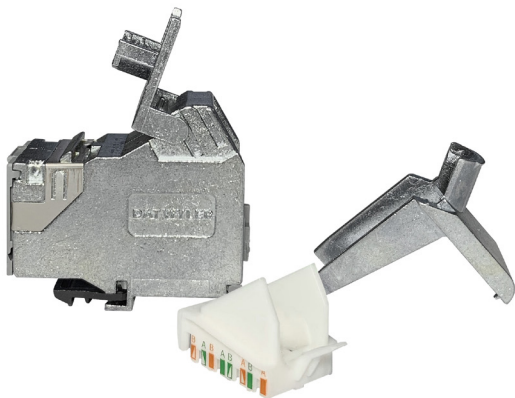

4- 418077

Cat 6A RJ-45 Male Module Connector, Field Assembly, Shielded - Datwyler. For (CCTV, ACS, Access Point) Outlets.



DATWYLER

RJ45 plug IP20 Cat.6_A

shielded

for tool-less field assembly



Description

Field assembly 8-pin RJ45 plug, IP20, Category 6A, shielded, with quick connection technology.

Suitable for cables with the following properties:

Solid copper wire: 0.40 mm up to 0.64 mm, AWG 26/1 up to AWG 22/1

Stranded copper wire: 0.46 mm up to 0.76 mm, AWG 27/7 up to AWG 22/7


Cable sheath diameter: 6 mm up to 8 mm

Protection rating: IP20

Solid housing made of zinc die cast.

Easy on-site assembly without any special tools.

With strain relief

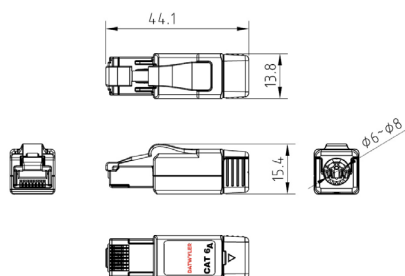

Dimensions

Application

For the transmission of Ethernet protocols in structured premises cabling in the industrial sector.

In Support of 10Base-T, 100Base-T, 1000Base-T and 10GBase-T

In support of PoE and PoE+

Electrical properties

Shielding

shielded

Standards

Cabling standards	ISO/IEC 11801
Cat./Class	Cat.6 _A / Class E _A
Connector standards	IEC 60603-7-51
PoE	IEEE 802.3bt Type 4 (100W)

Versions

Material number	Product	Colour	Weight [kg]	Packing unit	GTIN / EAN
118077	RJ45 plug, IP20, Category 6 _A , shielded, for field assembly	black	0.02 kg	1 pc.	40393910164923

Subject to technical modification

As of 2024-08-29 13:31:07

Patch panel MGK 48x

for 48 PS-GG45 7_A and modules with Keystone fitting
shielded



Patch panel MGK 48x, shielded

Description

Shielded 19"/1.5U patch panel for up to 48 PS-GG45 7A modules with Keystone clip and modules with Keystone fitting. Unused ports can be covered with blank covers. Front light grey, similar to RAL 7035. Strain relief with tie wrap. Delivery without modules.

Application

- Suitable for the following Datwyler modules:
- PS-GG45 7A 4P shielded
 - RJ45 module KS-T Plus 1/8 Cat.6A shielded
 - RJ45 module KS-TC Plus Cat.6A (IEC), shielded
 - RJ45 module MS-C6A 1/8 Cat.6A 180°-K shielded
 - RJ45 module KS-TS 1/8 Cat.6/EA shielded
 - RJ45 module KS-T 1/8 Cat.6/EA shielded

Electrical properties

EMC	shielded
-----	----------

Versions

Material number	Product	Outer dimensions	Colour	Weight [kg]	Packing unit
440051	Patch panel MGK 48x 19"/1,5U for 48x module with Keystone fitting	1.5 U66 mm x 482 mm x 145 mm	light grey	1.72 kg	1 pc.

Management Panel

19" 1U,All-Metal closed management panel

6,9 &15- 4000699

1U Cable Mangment 19" with Cover -Datwyler.



PRODUCT INFORMATION

APPLICATION Management Panel adopt all metal material ,beautiful ,practical and easy installation. It can help you manage the cables easily and safely with its closed structure

FEATURE Dimensions: 19" 1U
Available in black color

STANDARD GB50311, ISO/IEC 11801, TIA-568-C.2

ORDERING INFORMATION

Model No.	Description	Color	Unit
4000699	19" 1U Cable management with front panel	Black	1pc

Splice box OV-S

19"/1 U, E9/125 G.652.D BLO OS2, LCD/PC
with adapters and pigtails

12- 41521600ZY

Fibre Patch Panel 1U 24 LC (12 LCD) Multi Mode, full Loaded with Adapters, Ceramic Sleeve and 24 Pigtails MM OM3 2meter -Datwyler.



Description

For the termination of fibre optic cables.
Loaded with FO adapters, ready for splicing, with prepared pigtails (per 2 m, colour code: IEC 60304).

General properties

Outer dimensions (HxWxD)	1 U, 42 mm x 482.2 mm x 245 mm
Housing	metal sheet, black, extractable drawer with locking mechanism, box allows for depth-adjustable mounting (5 steps, maximum 50 mm)
Front plate	similar to RAL 7035, similar to RAL 9005 or stainless steel
Imprint	numbers (silk screen printing) on frontplate
Cable entry	rear left and right with pre-stamped cable entries M15, M20 and M25 - these pre-stamped holes can be opened as necessary
Strain relief	with cable tie and screwed cable gland (M20)
Capacity	up to 48 fibres
Labelling strip included	no
Mounting set included	no
Splice protectors included	no
Extractable drawer	yes
Fold-down drawer	no

Optical Properties

Fibre class	Singlemode
Fibre type	E9/125 G.652.D BLO
Fibre category	OS2
Colour code	IEC 60304
Adapter	LCD/PC
Adapter colour	blue
Ferrule material	Zirconia
Insertion loss (IL), maximal	0.25 dB
Insertion loss (IL), typical	0.12 dB
Return loss (RL), minimal	50 dB
Return loss (RL), typical	55 dB

Scope of delivery

- Splice box with
 - two straight cable entries
 - one screwed cable gland M20
 - coloured pigtails with measurement report
 - FO adapters, fastened by screws
 - splice trays with cover
 - splice holder for 12 x crimp splice protectors

Versions

Material number	Product	Colour (Frontplate)	Number of adapters	Adapter orientation	Pigtails	Weight [kg]	Packing unit	GTIN / EAN
41547200ZY	Splice box OV-S 2xLCD/PC	light grey	2	offset horizontal	4 x LC	2.5 kg	1 pc.	40393910009705
41547300ZY	Splice box OV-S 4xLCD/PC	light grey	4	offset horizontal	8 x LC	2.5 kg	1 pc.	40393910009699
41535700ZY	Splice box OV-S 6xLCD/PC	black	6	offset horizontal	12 x LC	2.5 kg	1 pc.	40393910011050
41521000ZY	Splice box OV-S 6xLCD/PC	light grey	6	offset horizontal	12 x LC	3 kg	1 pc.	40393910013252
41544800ZY	Splice box OV-S 12xLCD/PC	black	12	angled	24 x LC	2.8 kg	1 pc.	40393910009897
41534100ZY	Splice box OV-S 12xLCD/PC	black	12	offset horizontal	24 x LC	2.5 kg	1 pc.	40393910011203
41521400ZY	Splice box OV-S 12xLCD/PC	light grey	12	offset horizontal	24 x LC	3 kg	1 pc.	40393910013117
41533700ZY	Splice box OV-S 24xLCD/PC	black	24	offset horizontal	48 x LC	2.5 kg	1 pc.	40393910011234
41521800ZY	Splice box OV-S 24xLCD/PC	light grey	24	offset horizontal	48 x LC	3 kg	1 pc.	40393910013092

Variants on request.



Subject to technical modification

As of 2023-02-09 12:12:02

FO duplex patch cord LCD/PC - LCD/PC

E9/125 G.652.D BLO, Duplex Fig. 0

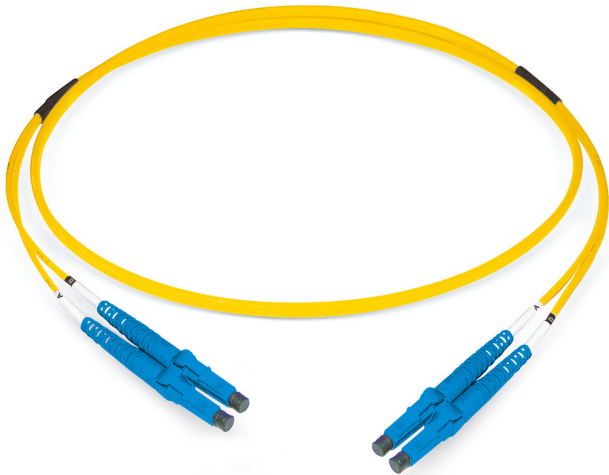


image similar

Description

Datwyler offers a broad range of terminated connectors for individual customer needs.

Construction

Cable	Duplex Fig. 0
Cable construction	I-V(ZN)HH (5.0x3.0mm)
Outer sheath colour	yellow
Outer sheath material	LSZH

General properties

Operating temperature	-10 °C - +60 °C
-----------------------	-----------------

Optical Properties

Lifetime	1000 connections with stable attenuation values
Reproducibility of the IL	a maximum of +/- 0.1dB
Fibre type	E9/125 G.652.D BLO
Ferrule material	Zirconia
Connector type side A	LCD/PC
IL maximal, connector A	0.25 dB
IL typical, connector A	0.12 dB
RL minimal, connector A	50 dB
RL typical, connector A	55 dB
Grade IEC61755, connector A (better than)	B2
Standard connector A	IEC 61754-20
Connector type side B	LCD/PC
IL maximal, connector B	0.25 dB
IL typical, connector B	0.12 dB
RL minimal, connector B	50 dB
RL typical, connector B	55 dB
Grade IEC61755, connector B (better than)	B2
Standard connector B	IEC 61754-20

Mechanical properties

Bending (IEC 60794-1-21 E11, reversible fibre attenuation)	≤ 0,5 dB
Connector cable retention	100 N
Crush resistance (IEC 60794-1-21 E3, reversible fibre attenuation)	≤ 0,2 dB
Tensile load (IEC 60794-1-21 E1 0,33% reversible fibre elongation)	200 N
Torsion (IEC 60794-1-21 E7, reversible fibre attenuation)	≤ 0,1 dB

Standards

Impact	IEC 60794-1-21 E4
Repeated bending	IEC 60794-1-21 E6

Versions

Material number	Product	Length (m)	Polarity	Weight [kg]	GTIN / EAN
423311	FO duplex patch cord LCD/PC - LCD/PC E9/125 G.652.D OS2	1	A to B	0.03 kg	40393910157369
423312	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	2	A to B	0.05 kg	40393910157352
423313	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	3	A to B	0.07 kg	40393910157345
423314	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	4	A to B	0.09 kg	40393910157338
423315	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	5	A to B	0.11 kg	40393910157321
423316	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	6	A to B	0.13 kg	40393910157314
423317	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	7	A to B	0.15 kg	40393910157307

Material number	Product	Length (m)	Polarity	Weight [kg]	GTIN / EAN
423318	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	8	A to B	0.17 kg	40393910157291
423319	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	9	A to B	0.19 kg	40393910157284
423320	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	10	A to B	0.21 kg	40393910157277
423384	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	11	A to B	0.23 kg	40393910156737
423386	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	13	A to B	0.27 kg	40393910156713
423387	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	14	A to B	0.29 kg	40393910156706
423391	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	16	A to B	0.33 kg	40393910156683
423392	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	17	A to B	0.35 kg	40393910156676
423393	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	18	A to B	0.37 kg	40393910156669
423394	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	19	A to B	0.39 kg	40393910156652
423395	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	20	A to B	0.41 kg	40393910156645
423396	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	21	A to B	0.43 kg	40393910156638
423397	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	22	A to B	0.45 kg	40393910156621
423398	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	23	A to B	0.47 kg	40393910156614
423399	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	24	A to B	0.49 kg	40393910156607
423370	FO duplex patch cord LCD/PC - LCD/PC, E9/125 G.652.D OS2	25	A to B	0.51 kg	40393910156829

Subject to technical modification

As of 2023-11-23 14:37:00

Outdoor Fiber Terminal Box

1- (FTB)

Description:

The FTB is rugged. Low profile interconnection between central office and multi-dwelling of FTTx application.

Features:

- FTB available in 2/4 or 12/24.
- Indoor/outdoor rated.
- You can use splitter.
- Suitable for wall mounting application.
- Available in LC or SC connector.
- Dust and splash-proof: IP65.



Description	Part Number
FTB Fiber Terminal Box 4 Fiber	TN-FTB-0004
FTB Fiber Terminal Box 24 Fiber	TN-FTB-0024

2- ODB Fiber

Description:

The fiber distribution box is applicable to optical terminals. It completes the connection, distribution and scheduling between subscriber cable and optical fiber terminals and is widely applied to optical fiber communication network projects. The product series are wall mounted and easy to use and maintain.

Features:

- ODB available in 24 Fiber.
- Wall mounted, Single door, front operation.
- Made of high-quality steel sheet, spraying for surface treatment.
- Perfect optical route design to ensure good bend radius of fiber.
- Applicable to pigtails 0.9mm.
- Available in LC connector.
- Protection and grounding.
- Dust and splash-proof: IP55

Description	Part Number
ODB Optical Distribution Box 12	TN-ODB-0012
ODB Optical Distribution Box 24	TN-ODB-0024
ODB Optical Distribution Box 36	TN-ODB-0036
ODB Optical Distribution Box 48	TN-ODB-0048
ODB Optical Distribution Box 72	TN-ODB-0072
ODB Optical Distribution Box 96	TN-ODB-0096
ODB Optical Distribution Box 144	TN-ODB-0144



METAL ENCLOSURES IP66



METAL ENCLOSURES IP66

Applications

Metal Enclosures are designed to accommodate various types of switchgear and controlgear assemblies to suit a variety of electrical installations in commercial and light industrial premises. They are designed for outdoor applications up to IP66.

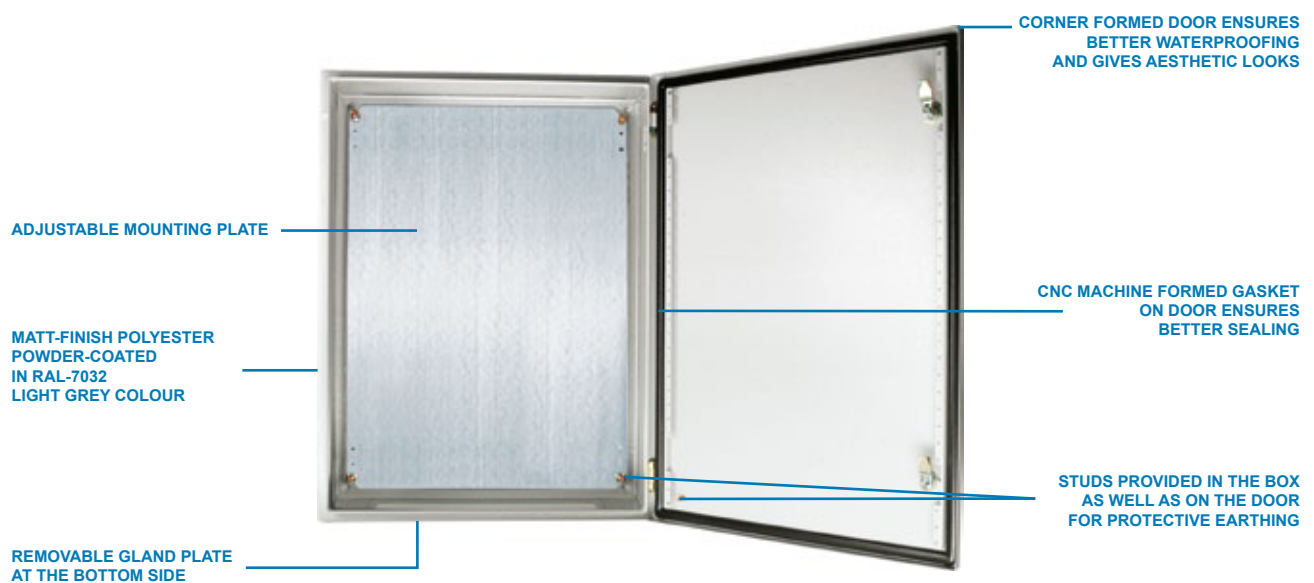


Figure - 1



Figure - 2



Figure - 3



Figure - 4

Specifications

- Made of high quality electro-galvanized steel sheet of thickness up to 1.5mm (refer tables on page 3 - 5)
- Matt-finish polyester powder coated in RAL-7032 light grey colour
- Standard mounting plate made of hot dip galvanized steel sheet of 2mm thickness with holes for strips (Figure - 3, can be supplied separately)
- Complies with IEC 60529/62208 standards
- Complies with CE standards
- Degree of protection up to IP66

Features

- Earthing studs are provided on both the enclosure and the door (Figure - 4)
- CNC machine formed polyurethane gasket for reliable sealing (Figure - 5)
- Corner formed door ensures better weatherproofing and gives aesthetic looks (Figure - 6)
- Easily removable hinges, ideal for changing the door opening direction (for certain sizes)
- Special profiled lip for better waterproofing (Figure - 7)
- Lock features:
 - Quarter turn cylindrical lock
 - Metal keys and locking mechanism for durability (Figure - 8)
 - Key engaged when the lock is open
- A kit containing assembly hardware and instruction manual is provided with the enclosure



Figure - 8



Figure - 5



Figure - 6



Figure - 7

METAL ENCLOSURES IP66

Product range

* Metal Enclosures Single Door

S#	Order Reference	H mm	W mm	D mm	Thickness	
					Encl (mm)	Mtg.Plt (mm)
1	047-SB202015D	200	200	150	1.2	2
2	047-SB252015D	250	200	150	1.2	2
3	047-SB252515D	250	250	150	1.2	2
4	047-SB302015D	300	200	150	1.2	2
5	047-SB302515D	300	250	150	1.2	2
6	047-SB302520D	300	250	200	1.2	2
7	047-SB303015D	300	300	150	1.2	2
8	047-SB303020D	300	300	200	1.2	2
9	047-SB403015D	400	300	150	1.2	2
10	047-SB403020D	400	300	200	1.2	2
11	047-SB404015D	400	400	150	1.2	2
12	047-SB404020D	400	400	200	1.2	2
13	047-SB404021D	400	400	210	1.2	2
14	047-SB404025D	400	400	250	1.5	2
15	047-SB406015D	400	600	150	1.2	2
16	047-SB406020D	400	600	200	1.2	2
17	047-SB406021D	400	600	210	1.2	2
18	047-SB406025D	400	600	250	1.5	2
19	047-SB406030D	400	600	300	1.5	2
20	047-SB504015D	500	400	150	1.2	2
21	047-SB504020D	500	400	200	1.2	2
22	047-SB504021D	500	400	210	1.2	2
23	047-SB504025D	500	400	250	1.5	2
24	047-SB504030D	500	400	300	1.5	2
25	047-SB505015D	500	500	150	1.2	2
26	047-SB505020D	500	500	200	1.2	2
27	047-SB505021D	500	500	210	1.2	2
28	047-SB505025D	500	500	250	1.5	2
29	047-SB505030D	500	500	300	1.5	2
30	047-SB604015D	600	400	150	1.2	2
31	047-SB604020D	600	400	200	1.2	2
32	047-SB604021D	600	400	210	1.2	2
33	047-SB604025D	600	400	250	1.5	2
34	047-SB604030D	600	400	300	1.5	2
35	047-SB605015D	600	500	150	1.2	2
36	047-SB605020D	600	500	200	1.2	2
37	047-SB605021D	600	500	210	1.2	2
38	047-SB605025D	600	500	250	1.5	2
39	047-SB605030D	600	500	300	1.5	2
40	047-SB606015D	600	600	150	1.2	2
41	047-SB606020D	600	600	200	1.2	2
42	047-SB606021D	600	600	210	1.2	2
43	047-SB606025D	600	600	250	1.5	2
44	047-SB606030D	600	600	300	1.5	2
45	047-SB705015D	700	500	150	1.2	2
46	047-SB705020D	700	500	200	1.2	2
47	047-SB705021D	700	500	210	1.2	2
48	047-SB705025D	700	500	250	1.5	2
49	047-SB705030D	700	500	300	1.5	2
50	047-SB706015D	700	600	150	1.5	2
51	047-SB706020D	700	600	200	1.5	2
52	047-SB706021D	700	600	210	1.5	2
53	047-SB706025D	700	600	250	1.5	2
54	047-SB706030D	700	600	300	1.5	2
55	047-SB707015D	700	700	150	1.5	2
56	047-SB707020D	700	700	200	1.5	2
57	047-SB707021D	700	700	210	1.5	2
58	047-SB707025D	700	700	250	1.5	2
59	047-SB707030D	700	700	300	1.5	2
60	047-SB806015D	800	600	150	1.5	2
61	047-SB806020D	800	600	200	1.5	2
62	047-SB806021D	800	600	210	1.5	2
63	047-SB806025D	800	600	250	1.5	2
64	047-SB806030D	800	600	300	1.5	2
65	047-SB808015D	800	800	150	1.5	2
66	047-SB808020D	800	800	200	1.5	2
67	047-SB808025D	800	800	250	1.5	2
68	047-SB808030D	800	800	300	1.5	2
69	047-SBX106015D	1000	600	150	1.5	2
70	047-SBX106020D	1000	600	200	1.5	2
71	047-SBX106025D	1000	600	250	1.5	2
72	047-SBX106030D	1000	600	300	1.5	2

* See Figure 9A on next page

RG-NIS-PA240-54

RG-NIS-PA120-54

Power Supply

DATASHEET

[Explore More](#)



Highlights

- Universal 90-264VAC input voltage
- Output short circuit, over-current, over-voltage, over-temperature protection
- Wide operating temperature range of -40°C to $+70^{\circ}\text{C}$

Specifications

Specification	RG-NIS-PA120-54	RG-NIS-PA240-54
Dimensions (W x D x H)	35 x 100 x 125mm	52 x 110 x 125mm
Net Weight	0.48kg	0.75kg
Mean Time Between Failure (MTBF)	>150K	>150K
Safety Compliance	EN 62638-1	EN 62638-1
Warranty	3 years	3 years
Power Supply	Nameplate Input Voltage Range: 100-240 V AC Input Voltage Range: 90-264 V AC Input Frequency Range: 50/60 Hz Input Current: 4 A Output Voltage Range: 52.38-55.62 V DC Output Current: 2.2 A	Nameplate Input Voltage Range: 100-240 V AC Input Voltage Range: 90-264 V AC Input Frequency Range: 50/60 Hz Input Current: 3.5 A Output Voltage Range: 52.38-55.62 V DC Output Current: 4.4 A
Power Consumption	≤120W	≤240W
Power Supply Surge Protection	Common mode: 4kV Differential mode: 2kV	Common mode: 4kV Differential mode: 2kV
Number of Fans	Fanless	Fanless
Fan Speed Control	Fanless	Fanless
Acoustic Noise Level	Noiseless	Noiseless
Max. Heat Dissipation	410.4 BTU/hr(220V/50Hz)	820.8 BTU/hr(220V/50Hz)
Operating Temperature	-40 to 70°C (derating: -40 to -20°C, 115VAC :2%/°C 45 to 70°C, 115VAC:2%/°C 50 to 70°C, 230VAC:2%/°C)	-40 to 70°C (derating: -40 to -30°C, 115VAC :4%/°C 45 to 70°C, 115VAC:2%/°C 50 to 70°C, 230VAC:2%/°C)
Storage Temperature	-40 to 85°C	-40 to 85°C
Operating Humidity	5% to 95% RH(non-condensing)	5% to 95% RH(non-condensing)

DATWYLER UPS - 1~3 kVA (1:1 Phase)

Tower / Rack Mounted

OVERVIEW


Datwyler's DUPS series is the small to medium power transformerless UPS. The series is designed to a high standard and can be improved based on client's technical and budget customization requirements.

APPLICATION

This Uninterruptible Power Supply (UPS) offers guaranteed power protection for connected electronics. When power is interrupted or fluctuates outside the safe levels, UPS will instantly provides a clean battery backup power and surge protection for connected and sensitive devices.

TECHNICAL FEATURES

- Tower / Rack convertible design
- Rotatable patented mini LCD display
- True online double conversion
- High output power factor at 0.9 pF
- Comprehensive display which allows easy monitoring and access of UPS status
- Smart SNMP works with either USB / RS-232
- Estimated remaining time displayed on the LCD
- Efficiency up to 90%
- Support Economic (ECO) operation mode
- Hot swappable battery pack
- Matching battery pack
- More powerful charger for option
- Cold start
- Power shedding may turn off uncritical load in battery backup
- Emergency power off system
- Frequency converter mode is settable

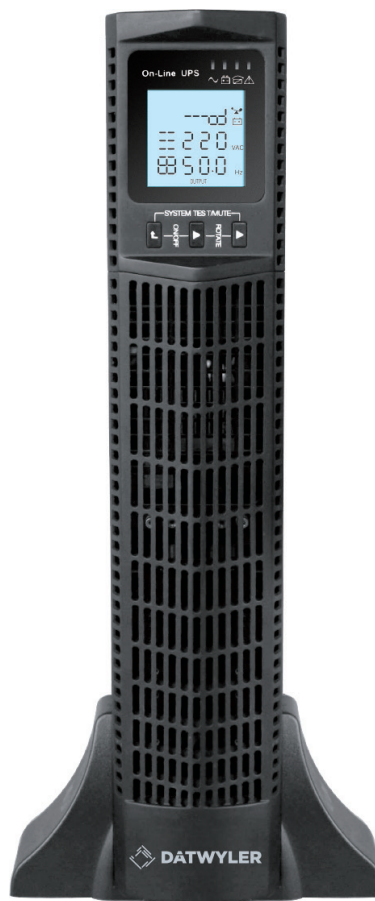

DATWYLER UPS - 1~3 kVA (1:1 Phase)

Tower / Rack Mounted

SPECIFICATIONS

MODEL		40014640ZY	40014650ZY	40014700ZY
Capacity (VA/Watts)		1000 / 900	2000 / 1800	3000 / 2700
Phase		Single phase with ground		
Input				
Nominal voltage		200/208/220/230/240 VAC or 100/110/115/120/127 VAC		
Input voltage range		55~150 VAC or 110~300VAC @ 60% load, 80~145 VAC or 160~300 VAC @ 100% load		
Frequency range		45~55 Hz / 55~65 Hz (Auto-detect)		
Power factor		≥0.99 @ nominal voltage (100% load)		
OUTPUT				
Output voltage		200/208/220/230/240 VAC or 100/110/115/120/127 VAC		
Power factor		0.9 pF		
Voltage regulation		±1%		
Frequency range (Synchronized range)		45 ~ 55Hz / 56 ~ 64Hz		
Frequency range (Batt. mode)		50Hz / 60Hz ± 0.1Hz		
Current crest ratio		3:1		
Harmonic distortion		≤3% THD (Linear load) ≤6% THD (Non-linear load)		
Transfer time	AC to DC	Zero		
	Inverter to bypass	4ms (Typical)		
Waveform		Pure sine wave		
EFFICIENCY				
AC mode		90%	91%	91%
Battery mode		85%	88%	86%
BATTERY (Internal)				
Standard model	Battery type	Lead acid 12V/9AH		
	Numbers	2	4	6
	Backup time	3.3 minutes		
	Typical recharging time	4 hours recover to 90% capacity		
	Charging current (max.)	1.0A		
	Charging voltage	27.4 VDC ± 1% / 41.1VDC ± 1%	54.7 VDC ± 1% / 82.1 VDC ± 1%	82.1 VDC ± 1%
	Dimension, D×W×H(mm)	94x151x65	94x151x65	94x151x65
Physical	Net weight(kgs)	5	10	15
ALARM				
Battery mode		Beeping every 4 seconds		
Battery low		Beeping every second		
Overload		Beeping twice every second		
Fault		Continuously beeping		
PHYSICAL				
Standard model	Dimension, D×W×H(mm)	430×440×86.5	552 × 440 × 86.5	710×440×86.5
	Net weight(kgs)	8.9	10.1	12
ENVIRONMENT				
Humidity		20-90% RH @ 0-40°C (Non-condensing)		
Noise level		<50dB @ 1 Meter		
MANAGEMENT				
LCD		Load level, Battery level, AC mode, Battery mode, Bypass mode, and Fault indicators		
Smart RS-232 / USB		Supports Windows® 2000 / 2003 / XP / Vista / 2008 Windows® 7 / 8 Linux, FreeBSD and MAC		
Optional SNMP		Power management from SNMP manager and web browser		

Packaging dimension differ based on actuals or customised packing requests.

DATWYLER UPS - 1~3 kVA (1:1 Phase)

Tower / Rack Mounted

EXTERNAL BATTERY			
MODEL	40015000ZY	40015100ZY	40015200ZY
Installation	Tower or/2U Rack Mounted		
Battery type	12V/9AH		
Number of Batteries	4 Pcs	8 Pcs	12 Pcs
Supporting UPS	1kVa	2kVa	3kVa
Back up Time* (Minutes)	15		

* For more backup time , Please refer to backup time configuration sheet for more details

Ordering Information:

Article	Item Description
40014640ZY	1 kVA Online UPS, Rotable LCD screen, I/O Single Phase 230V, Built in 2X9AH Batteries, (2 Years Warranty)
40014650ZY	2 kVA Online UPS, Rotable LCD screen, I/O Single Phase 230V, Built in 4X9AH Batteries, (2 Years Warranty)
40014700ZY	3 kVA Online UPS, Rotable LCD screen, I/O Single Phase 230V, Built in 6X9AH Batteries, (2 Years Warranty)
40015500ZY	Rail Kit for 1, 2 & 3 kVA UPS.
40015700ZY	SNMP Card for(1-3 kVA) UPS, USB & RS-232 ports.
40015000ZY	1 kVA Battery Back Module, Tower or/2U Rack Mounted (Additional Accessories)with Built in 4 X12V/9AH batteries for (15 Minutes), (1 Year Warranty)
40015100ZY	2kVA Battery Back Module, Tower or/2U Rack Mounted (Additional Accessories)with Built in 8 X12V/9AH batteries for (15 Minutes), (1 Year Warranty)
40015200ZY	3kVA Battery Back Module, Tower or/2U Rack Mounted (Additional Accessories)with Built in 12 X12V/9AH batteries for (15 Minutes), (1 Year Warranty)

Packaging dimension differ based on actuals or customised packing requests.


CU 6552 4P / 2x4P F8

Data cable, F/FTP, Category 6_A, AWG 23, Euroclass Dca

500 MHz



- 1 Inner conductor: AWG23 Bare copper wire
- 2 PE insulated conductor: 1.3 mm Ø
- 3 Screen (pair): Alu PETP foil
- 4 Drain wire: Tinned copper wire
- 5 Overall screen: Alu PETP foil
- 6 Outer sheath: FRNC/LSOH orange RAL 2003



Description

Electrically and mechanically improved quality Cat.6A data cable - fulfils the requirements of ISO/IEC 11801, IEC 61156-5, EN 50173-1 and prEN 50288-10-1.

Excellent shielding effect due to individually screened pairs and overall foil screen.

Compatible with all current connecting hardware in accordance with EN 50173 and ISO/IEC 11801.

Application

Data cable for structured premises cabling.

For the transmission of digital and analogue voice, video and data signals.

Suitable for all ICT network applications up to class EA applications (500 MHz) in accordance with EN 50173-1 and ISO/IEC 11801.

Applicable for Power over Ethernet (PoE) / PoE+.

Supported Applications: 10Base-T, 100Base-T, 1000Base-T, 2.5GBase-T, 5GBase-T, 10GBase-T, Fieldbus

General Properties

Field of application	Indoor
Imprint	DATWYLER «cable type» «additional text» «batch number» «meter marks»
Wire colour	white/blue, white/orange, white/green, white/brown, according to IEC 60189 and IEC 60708
Installation temperature	0 °C - +50 °C
Operating temperature	-20 °C - +60 °C
Outer sheath colour	orange
Outer sheath material	FRNC/LSZH

Electrical properties

Category	Cat.6 _A
Coupling attenuation	70 dB
Delay Skew	5 ns/100 m
Gbit/s	Up to 10 Gbit/s
Impedance at 100 MHz, $\pm 5\Omega$	100 Ω
Loop resistance at 20°C	150 Ω /km
Near end unbalance attenuation LCL at 1-600 MHz	40 dB
NVP %	79
operating capacity	42 pF/m
Segregation class	c
Shielding	shielded
Transfer impedance 1/10/30 MHz	< 50/100/200 m Ω /m

Frequency [MHz]	Category	Attenuation [dB]	NEXT [dB]	PS-NEXT [dB]	ACR-N [dB]	PS-ACR-N [dB]	ACR-F [dB]	Return Loss [dB]
1		2.1	93	90	91	88	96	26
4		3.8	93	90	89	86	96	28
10		5.9	93	90	87	84	96	30
100	5e	19	93	90	73	70	74	30
250	6	30	83	80	53	50	56	27
500	6 _A	43	75	72	32	29	33	21

The performance data given are typical measured values.

Mechanical properties

Solid / Flex	Solid wire
AWG	23
Minimal crush resistance / 10cm	1,000 N
Minimum bending radius during installation	56 mm
Minimum bending radius permanently installed	28 mm
Minimum number of impacts	10
Tensile strength (2x4P)	190 N
Tensile strength (4P)	95 N

Standards

Cat./Class	Cat.6 _A / Class E _A
PoE	IEEE 802.3bt Type 4 (100W)
Reaction to fire (Euroclasses)	EN 13501-6: D _{ca}
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2, AREI-RGIE Art.104-SA
Flame Propagation	IEC 60332-1-2, EN 60332-1-2, VDE 0482-332-1-2, AREI-RGIE Art.104-F1
Flame Spread	IEC 60332-3-24, EN 60332-3-24, AREI-RGIE Art.104-F2
Smoke Density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2, AREI-RGIE Art.104-SD
Cables Standard	ISO/IEC 61156-5, EN 50288-10-1

Versions

Material number	Product	Reaction To Fire	Dimensions n x p x [mm (AWG)]	Outer sheath dimensions [mm]	CU rate [kg/km]	Weight [kg/km]	Fire load [kWh/m]	Packing unit	GTIN / EAN
19145400DK	CU 6552 4P	Dca-s2,d1,a1	4 x 2 x 0.55 (AWG23)	7	20.0	49	0.14	1000 m drum	40393910030815
19145400DL	CU 6552 4P	Dca-s2,d1,a1	4 x 2 x 0.55 (AWG23)	7	20.0	49	0.14	500 m drum	40393910030808
19145600DL	CU 6552 2x4P	Dca-s2,d1,a1	2 x (4 x 2 x 0.55 (AWG23))	7.0 x 14.3	40.0	98	0.28	500 m drum	40393910030655

Subject to technical modification

As of 2022-08-12 07:38:15

Patch panel KS 24x

for 24 modules with Keystone fitting
shielded



Patch panel KS 24x, shielded



Blank covers, black and white

Description

Shielded 19"/1U patch panel for up to 24 modules with Keystone fitting.

Snap-in modules can be easily fitted into the patch panel.

Unused ports can be covered with blank covers. For the modules PS-GG45 7A Datwyler recommends the patch panel MGK 24x. Front panel made of flame retardant compound, UL94V-0 rated, in combination with stainless steel and a cable strain relief.

Front in grey, similar to RAL 7035, or in black, similar to RAL 9005.

Strain relief with tie wrap. Delivery without modules.

Application

Suitable for the following Datwyler modules:

- RJ45 module KS-T Plus 1/8 Cat.6A shielded
- RJ45 module KS-TC Plus Cat.6A (IEC), shielded
- RJ45 module MS-C6A 1/8 Cat. 6A 180°-K shielded
- RJ45 module KU Plus 1/8 Cat.6A unshielded
- RJ45 module KS-TS 1/8 Cat.6/EA shielded
- RJ45 module KS-T 1/8 Cat.6/EA shielded
- RJ45 module KU-T 1/8 Cat.6 / Cat.5e unshielded

Electrical properties

EMC	shielded
-----	----------

Versions

Material number	Product	Outer dimensions	Colour	Weight [kg]	Packing unit
418019	Patch panel KS 24x, 19"/1U, for 24x RJ45 keystone modules, FTP (delivery without modules)	1 U44 mm x 482 mm x 160 mm	black	0.93 kg	1 pc.
418020	Patch panel KS 24x, 19"/1U, for 24x RJ45 keystone modules, FTP (delivery without modules)	1 U44 mm x 482 mm x 160 mm	light grey	0.93 kg	1 pc.

KS-TC Plus Cat.6_A (IEC) tool-less, compact

RJ45 module, shielded, Category 6_A (IEC)



KS-TC Plus Cat.6A (IEC) RJ45 module, tool-less, shielded, with dust shutter



Description

For the transmission of digital and analogue voice-, video- and data signals.

The KS-TC Plus RJ45 module is specified up to 500 MHz in compliance with the component standard IEC 60603-7-51.

Enables acceptance testing with high spare capacity at the limit values stipulated for Class EA Permanent Links when combined with shielded Category 6_A, 7, 7_A and 8 data cables. Therefore it is applicable for 10-gigabit Ethernet transmissions in accordance with IEEE 802.3.

Useable for Power over Ethernet, PoE+ and 4PPoE application. Solid zinc die casting housing with mounting clip for installation in Keystone panels and outlets.

Contact spring with phosphor bronze alloy, plated with gold.

For connecting the wires a wire manager is used in combination with two integrated moveable housing wings for tool-less IDC connections. Only for cutting the wires a plane wire cutter is necessary.

The 360° metal shield ensures a durable fully shielded environment.

The module comes with an integrated strain relief, no cable tie is needed.

The module is re-usable.

Potential balancing possibility directly at the module when needed.

With removable black dust shutter. Other colours available as accessories sets.



General properties

Youtube link	https://www.youtube.com/embed/e4AC7h4gKc8
Installation temperature	-10 °C - +60 °C
Storage temperature	-40 °C - +70 °C
Operating temperature	-40 °C - +70 °C

Electrical properties

Gbit/s	Up to 10 Gbit/s
Shielding	shielded

Mechanical properties

Connection type	IDC insulation displacement connectors
Solid copper wire	0.42 (AWG 26) - 0.65 (AWG 22)
Stranded copper wire	AWG26/7 - AWG23/7
Diameter over Insulation	0.70 mm - 1.40 mm
Re-connection	for AWG 22, AWG 23 and AWG 24 when using the same or bigger wire diameter
Re-usable	according ISO/IEC 11801 Annex B

Standards

Cabling standards	ISO/IEC 11801, EN 50173-1, TIA/EIA 568-x
Cat./Class	Cat.6 _A / Class E _A
Connector standards	IEC 60603-7-51, IEC 60512-99-002
PoE	IEEE 802.3bt Type 4 (100W)

Versions

Material number	Product	Colour	Weight [kg]	Packing unit	GTIN / EAN
418069002H	RJ45 module KS-TC Plus Cat.6 _A (IEC) tool-less, shielded, with dust shutter	silver	0.03 kg	12 pcs	40393910211283
418069	RJ45 module KS-TC Plus Cat.6 _A (IEC) tool-less, shielded, with dust shutter	silver	0.03 kg	12 pcs	40393910165005

Subject to technical modification

As of 2023-10-19 11:22:30

RJ45 patch cords Cat.6_A IEC

500 MHz, shielded (S/FTP), wiring 1:1



Description

Shielded patch cords and connection cables with shielded **RJ45 plug** on both ends, fitted with an anti-snag boot in the same colour as the cable sheath and with latch protection.

The cable CU 7702 flex 4P (Cat.7) meets the requirement of CPR classification Dca and offers excellent Next and impedance values due to the individually foil screened pairs (PiMF). Due to the overall copper braid, the patch cables have an excellent screen performance and are highly flexible. They are optimized for the transmission of CATV signals up to 862 MHz.

The patch cords meet all the requirements of Category 6A (IEC) and the limit values stipulated for Class EA cabling links (Channels) for 10GBase-T applications. Standard assortment: from 0.5 m up to 20 m.

Customised adjustments (anti-snag boot, termination, label) are available at short notice.

Construction

Cable construction	4x2
Outer sheath material	FRNC/LSZH
Wire material	bare copper wire

General properties

Anti-kink sleeve	coloured
Cable type	S/FTP
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)
Installation temperature	0 °C - +50 °C
Operating temperature	-20 °C - +60 °C

Electrical properties

Pin assignment	1:1
Category	6A (IEC)
Gbit/s	Up to 10 Gbit/s
NVP %	78
Shielding	shielded

Mechanical properties

AWG	26
-----	----

Standards

Smoke density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2 (FRNC/LSOH)
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2
Flame propagation	IEC 60332-1-2, EN 60332-1-2, VDE 0482-332-1-2
Cabling standards	ISO/IEC 11801, EN 50173-1
Cat 6A	IEC 61935-2
Cat./Class	Cat.6 _A / Class E _A
Class EA	ISO/IEC 11801, EN 50173-1
PoE	IEEE 802.3bt Type 4 (100W)

Versions


Material number	Product	Outer sheath colour	Length (m)	Colour anti-kink sleeve	Fire retardant version	Halogen free	Weight [kg]	Packing unit	GTIN / EAN
65380300DY	RJ45 patch cords Cat.6 _A (IEC)	black	0.5	black	yes	yes	0.03 kg	1 pc.	40393910000733
65380800DY	RJ45 patch cords Cat.6 _A (IEC)	black	1	black	yes	yes	0.05 kg	1 pc.	40393910000726
65380900DY	RJ45 patch cords Cat.6 _A (IEC)	black	1.5	black	yes	yes	0.07 kg	1 pc.	40393910000719
65381000DY	RJ45 patch cords Cat.6 _A (IEC)	black	2	black	yes	yes	0.09 kg	1 pc.	40393910000702
65381100DY	RJ45 patch cords Cat.6 _A (IEC)	black	2.5	black	yes	yes	0.11 kg	1 pc.	40393910000696
65381200DY	RJ45 patch cords Cat.6 _A (IEC)	black	3	black	yes	yes	0.13 kg	1 pc.	40393910000689
65381400DY	RJ45 patch cords Cat.6 _A (IEC)	black	4	black	yes	yes	0.17 kg	1 pc.	40393910000672
65381600DY	RJ45 patch cords Cat.6 _A (IEC)	black	5	black	yes	yes	0.21 kg	1 pc.	40393910000665
65381800DY	RJ45 patch cords Cat.6 _A (IEC)	black	6	black	yes	yes	0.25 kg	1 pc.	40393910003772
65382000DY	RJ45 patch cords Cat.6 _A (IEC)	black	7	black	yes	yes	0.29 kg	1 pc.	40393910003758
65382400DY	RJ45 patch cords Cat.6 _A (IEC)	black	9	black	yes	yes	0.37 kg	1 pc.	40393910003727
65382600DY	RJ45 patch cords Cat.6 _A (IEC)	black	10	black	yes	yes	0.41 kg	1 pc.	40393910000641
65382700DY	RJ45 patch cords Cat.6 _A (IEC)	black	12.5	black	yes	yes	0.51 kg	1 pc.	40393910000634
65383000DY	RJ45 patch cords Cat.6 _A (IEC)	black	20	black	yes	yes	0.81 kg	1 pc.	40393910000610
65370300DY	RJ45 patch cords Cat.6 _A (IEC)	blue	0.5	blue	yes	yes	0.03 kg	1 pc.	40393910001075
65370800DY	RJ45 patch cords Cat.6 _A (IEC)	blue	1	blue	yes	yes	0.05 kg	1 pc.	40393910001068
65370900DY	RJ45 patch cords Cat.6 _A (IEC)	blue	1.5	blue	yes	yes	0.07 kg	1 pc.	40393910001051
65371000DY	RJ45 patch cords Cat.6 _A (IEC)	blue	2	blue	yes	yes	0.09 kg	1 pc.	40393910001044
65371100DY	RJ45 patch cords Cat.6 _A (IEC)	blue	2.5	blue	yes	yes	0.11 kg	1 pc.	40393910001037
65371200DY	RJ45 patch cords Cat.6 _A (IEC)	blue	3	blue	yes	yes	0.13 kg	1 pc.	40393910001020
65371400DY	RJ45 patch cords Cat.6 _A (IEC)	blue	4	blue	yes	yes	0.17 kg	1 pc.	40393910001013
65371600DY	RJ45 patch cords Cat.6 _A (IEC)	blue	5	blue	yes	yes	0.21 kg	1 pc.	40393910001006
65371800DY	RJ45 patch cords Cat.6 _A (IEC)	blue	6	blue	yes	yes	0.25 kg	1 pc.	40393910004410

Material number	Product	Outer sheath colour	Length (m)	Colour anti-kink sleeve	Fire retardant version	Halogen free	Weight [kg]	Packing unit	GTIN / EAN
65372000DY	RJ45 patch cords Cat.6 _A (IEC)	blue	7	blue	yes	yes	0.29 kg	1 pc.	40393910004397
65372200DY	RJ45 patch cords Cat.6 _A (IEC)	blue	8	blue	yes	yes	0.33 kg	1 pc.	40393910004380
65372400DY	RJ45 patch cords Cat.6 _A (IEC)	blue	9	blue	yes	yes	0.37 kg	1 pc.	40393910004366
65372600DY	RJ45 patch cords Cat.6 _A (IEC)	blue	10	blue	yes	yes	0.41 kg	1 pc.	40393910000986
65372700DY	RJ45 patch cords Cat.6 _A (IEC)	blue	12.5	blue	yes	yes	0.51 kg	1 pc.	40393910000979
65372800DY	RJ45 patch cords Cat.6 _A (IEC)	blue	15	blue	yes	yes	0.61 kg	1 pc.	40393910000962
65373000DY	RJ45 patch cords Cat.6 _A (IEC)	blue	20	blue	yes	yes	0.81 kg	1 pc.	40393910000955
65355300DY	RJ45 patch cords Cat.6 _A (IEC)	green	0.5	green	yes	yes	0.03 kg	1 pc.	40393910001587
65355800DY	RJ45 patch cords Cat.6 _A (IEC)	green	1	green	yes	yes	0.05 kg	1 pc.	40393910001570
65355900DY	RJ45 patch cords Cat.6 _A (IEC)	green	1.5	green	yes	yes	0.07 kg	1 pc.	40393910001563
65356000DY	RJ45 patch cords Cat.6 _A (IEC)	green	2	green	yes	yes	0.09 kg	1 pc.	40393910001556
65356100DY	RJ45 patch cords Cat.6 _A (IEC)	green	2.5	green	yes	yes	0.11 kg	1 pc.	40393910001549
65356200DY	RJ45 patch cords Cat.6 _A (IEC)	green	3	green	yes	yes	0.13 kg	1 pc.	40393910001532
65356400DY	RJ45 patch cords Cat.6 _A (IEC)	green	4	green	yes	yes	0.17 kg	1 pc.	40393910001525
65356600DY	RJ45 patch cords Cat.6 _A (IEC)	green	5	green	yes	yes	0.21 kg	1 pc.	40393910001518
65356800DY	RJ45 patch cords Cat.6 _A (IEC)	green	6	green	yes	yes	0.25 kg	1 pc.	40393910005271
65357000DY	RJ45 patch cords Cat.6 _A (IEC)	green	7	green	yes	yes	0.29 kg	1 pc.	40393910005257
65357200DY	RJ45 patch cords Cat.6 _A (IEC)	green	8	green	yes	yes	0.33 kg	1 pc.	40393910005240
65357400DY	RJ45 patch cords Cat.6 _A (IEC)	green	9	green	yes	yes	0.37 kg	1 pc.	40393910005226
65357600DY	RJ45 patch cords Cat.6 _A (IEC)	green	10	green	yes	yes	0.41 kg	1 pc.	40393910001495
65357700DY	RJ45 patch cords Cat.6 _A (IEC)	green	12.5	green	yes	yes	0.51 kg	1 pc.	40393910001488
65357800DY	RJ45 patch cords Cat.6 _A (IEC)	green	15	green	yes	yes	0.61 kg	1 pc.	40393910001471
65358000DY	RJ45 patch cords Cat.6 _A (IEC)	green	20	green	yes	yes	0.81 kg	1 pc.	40393910001464
65350000DY	RJ45 patch cords Cat.6 _A (IEC)	grey	0.2	grey	yes	yes	0.02 kg	1 pc.	40393910005868
65350300DY	RJ45 patch cords Cat.6 _A (IEC)	grey	0.5	grey	yes	yes	0.03 kg	1 pc.	40393910001754
65350800DY	RJ45 patch cords Cat.6 _A (IEC)	grey	1	grey	yes	yes	0.05 kg	1 pc.	40393910001747
65350900DY	RJ45 patch cords Cat.6 _A (IEC)	grey	1.5	grey	yes	yes	0.07 kg	1 pc.	40393910001730
65351000DY	RJ45 patch cords Cat.6 _A (IEC)	grey	2	grey	yes	yes	0.09 kg	1 pc.	40393910001723
65351100DY	RJ45 patch cords Cat.6 _A (IEC)	grey	2.5	grey	yes	yes	0.11 kg	1 pc.	40393910001716
65351200DY	RJ45 patch cords Cat.6 _A (IEC)	grey	3	grey	yes	yes	0.13 kg	1 pc.	40393910001709
65351400DY	RJ45 patch cords Cat.6 _A (IEC)	grey	4	grey	yes	yes	0.17 kg	1 pc.	40393910001693

FO Universal ZGGFR / U-DQ(ZN)BH

up to 24 fibres, Euroclass Dca

metal-free, dry interstices, rodent protection,
flame retardant, longitudinally watertight
in accordance with IEC 60332-1-2 and IEC 60332-3-24

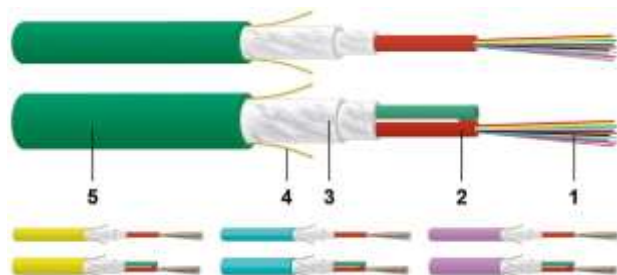

- 1 ≤ 24 fibres
- 2 Loose tube
- 3 Glass armour
- 4 Ripcord
- 5 FR/LSOH sheath



Description

Robust, non-metallic fibre optic outdoor and indoor cable with one or two central loose-tubes.
High crush resistance for high transmission reliability.
Easy handling due to cable construction with dry interstices.
Non-metallic rodent protection.
The two coloured ripcords are easy to identify and enable the safe opening of the cable sheath.
Flame retardant halogen-free FR/LSOH sheath.

Application

LAN backbone, access and riser zone.
Connection cable between the building distributors and/or floor distributors.
Suitable for laying in cable trays, ducts and vertical shafts.
Can also be spliced in all FO distributors and joints.

Construction

Outer sheath material	FRNC/LSZH
-----------------------	-----------

General properties

Maximum number of fibres	24
Installation temperature	-10 °C - +50 °C
Storage temperature	-25 °C - +70 °C
Operating temperature	-25 °C - +70 °C
Imprint	DATWYLER «cable type» «Datwyler designation» «DIN designation» «no. of fibres» «fibre type» «add. text» «batch no.» «meter marks»
Field of application	Universal

Standards

Tensile performance	IEC 60794-1-21 E1
Crush resistance	IEC 60794-1-21 E3
Impact	IEC 60794-1-21 E4
Repeated bending	IEC 60794-1-21 E6
Torsion	IEC 60794-1-21 E7
Bend	IEC 60794-1-21 E11
Temperature cycling	IEC 60794-1-22 F1
Water penetration	IEC 60794-1-22 F5
Reaction to fire	EN 13501-6
Euroclass	D _{ca}
Smoke density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2
Flame propagation	IEC 60332-1-2, EN 60332-1-2, VDE 0482-332-1-2
Flame spread	IEC 60332-3-24, EN 60332-3-24, VDE 0482-332-3-24
UV resistance	EN 50289-4-17

Versions

Material number	Product	Reaction to fire	Outer sheath colour	Fibre type	Fibre category	Outer sheath diameter [mm]	Bending radius [mm]	Weight [kg/km]	Tensile load short term [N]	Tensile load continuous [N]	Crush resistance short term [N]	Crush resistance continuous [N]	Fire load [kWh/m]	Packing unit	GTIN / EAN
19020300DZ	FO Universal ZGGFR 1x4	Dca-s2,d1,a1	green	E9/125 G.652.D OS2	OS2	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
18593800DZ	FO Universal ZGGFR 1x4	Dca-s2,d1,a1	green	G50/125 OM2	OM2	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
18598900DZ	FO Universal ZGGFR 1x4	Dca-s2,d1,a1	green	G50/125 OM3	OM3	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19271200DZ	FO Universal ZGGFR 1x4	Dca-s2,d1,a1	green	G50/125 OM4	OM4	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19020400DZ	FO Universal ZGGFR 1x6	Dca-s2,d1,a1	green	E9/125 G.652.D OS2	OS2	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19342100DZ	FO Universal ZGGFR 1x6	Dca-s2,d1,a1	yellow	E9/125 G.652.D OS2	OS2	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19011200DZ	FO Universal ZGGFR 1x6	Dca-s2,d1,a1	green	G50/125 OM3	OM3	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19342500DZ	FO Universal ZGGFR 1x6	Dca-s2,d1,a1	turquoise	G50/125 OM3	OM3	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19336000DZ	FO Universal ZGGFR 1x6	Dca-s2,d1,a1	green	G50/125 OM4	OM4	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19342900DZ	FO Universal ZGGFR 1x6	Dca-s2,d1,a1	heather violet	G50/125 OM4	OM4	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19020500DZ	FO Universal ZGGFR 1x8	Dca-s2,d1,a1	green	E9/125 G.652.D OS2	OS2	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
18595900DZ	FO Universal ZGGFR 1x8	Dca-s2,d1,a1	green	G50/125 OM3	OM3	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
18736300DZ	FO Universal ZGGFR 1x8	Dca-s2,d1,a1	green	G50/125 OM4	OM4	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	

Material number	Product	Reaction to fire	Outer sheath colour	Fibre type	Fibre category	Outer sheath diameter [mm]	Bending radius [mm]	Weight [kg/km]	Tensile load short term [N]	Tensile load continuous [N]	Crush resistance short term [N]	Crush resistance continuous [N]	Fire load [kWh/m]	Packing unit	GTIN / EAN
19442200DZ	FO Universal ZGGFR 1x8	Dca-s2,d1,a1	heather violet	G50/125 OM4	OM4	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19007700DZ	FO Universal ZGGFR 1x12	Dca-s2,d1,a1	green	E9/125 G.652.D OS2	OS2	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19342200DZ	FO Universal ZGGFR 1x12	Dca-s2,d1,a1	yellow	E9/125 G.652.D OS2	OS2	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19331400DZ	FO Universal ZGGFR 1x12	Dca-s2,d1,a1	green	E9/125 G.652.D BLO	OS2	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
18635000DZ	FO Universal ZGGFR 1x12	Dca-s2,d1,a1	green	G50/125 OM3	OM3	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19342600DZ	FO Universal ZGGFR 1x12	Dca-s2,d1,a1	turquoise	G50/125 OM3	OM3	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19125100DZ	FO Universal ZGGFR 1x12	Dca-s2,d1,a1	green	G50/125 OM4	OM4	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19343000DZ	FO Universal ZGGFR 1x12	Dca-s2,d1,a1	heather violet	G50/125 OM4	OM4	7.6	115	67	3,000	1,000	5,000	3,000	0.275	by the metre	
19296900DZ	FO Universal ZGGFR 1x12	Dca-s2,d1,a1	green	G50/125 OM4	OM4	8.2	125	72	3,500	1,500	5,000	3,000	0.336	by the metre	
18735400DZ	FO Universal ZGGFR 1x24	Dca-s2,d1,a1	green	E9/125 G.652.D OS2	OS2	8.2	125	72	3,500	1,500	5,000	3,000	0.336	by the metre	
19333700DZ	FO Universal ZGGFR 1x24	Dca-s2,d1,a1	green	E9/125 G.652.D BLO	OS2	8.2	125	72	3,500	1,500	5,000	3,000	0.336	by the metre	
19175500DZ	FO Universal ZGGFR 1x24	Dca-s2,d1,a1	green	G50/125 OM3	OM3	8.2	125	72	3,500	1,500	5,000	3,000	0.336	by the metre	
19271300DZ	FO Universal ZGGFR 1x24	Dca-s2,d1,a1	green	G50/125 OM4	OM4	8.2	125	72	3,500	1,500	5,000	3,000	0.336	by the metre	
19007100DZ	FO Universal ZGGFR 2x12	Dca-s2,d1,a1	green	E9/125 G.652.D OS2	OS2	9.5	140	94.3	4,000	1,500	5,000	3,000	0.43	by the metre	
19342300DZ	FO Universal ZGGFR 2x12	Dca-s2,d1,a1	yellow	E9/125 G.652.D OS2	OS2	9.5	140	84	4,000	1,500	5,000	3,000	0.43	by the metre	
18643200DZ	FO Universal ZGGFR 2x12	Dca-s2,d1,a1	green	G50/125 OM3	OM3	9.5	140	84	4,000	1,500	5,000	3,000	0.43	by the metre	
19342700DZ	FO Universal ZGGFR 2x12	Dca-s2,d1,a1	turquoise	G50/125 OM3	OM3	9.5	140	84	4,000	1,500	5,000	3,000	0.43	by the metre	
19125200DZ	FO Universal ZGGFR 2x12	Dca-s2,d1,a1	green	G50/125 OM4	OM4	9.5	140	84	4,000	1,500	5,000	3,000	0.43	by the metre	
19343100DZ	FO Universal ZGGFR 2x12	Dca-s2,d1,a1	heather violet	G50/125 OM4	OM4	9.5	140	84	4,000	1,500	5,000	3,000	0.43	by the metre	
19013700DZ	FO Universal ZGGFR	Dca-s2,d1,a1	green	E9/125 G.652.D OS2 + G50/125 OM3	OS2	9.5	140	84	4,000	1,500	5,000	3,000	0.43	by the metre	

Splice box OV-S

19"/1 U, G50/125 OM3, LCD/PC

with adapters and pigtails



Description

For the termination of fibre optic cables.

Loaded with FO adapters, ready for splicing, with prepared pigtails (per 2 m, colour code: IEC 60304).

General properties

System	OV-S splice
Outer dimensions (HxWxD)	1 U, 42 mm x 482.2 mm x 245 mm
Housing	metal sheet, black, extractable drawer with locking mechanism, box allows for depth-adjustable mounting (5 steps, maximum 50 mm)
Front plate	similar to RAL 7035, similar to RAL 9005 or stainless steel
Imprint	numbers (silk screen printing) on frontplate
Cable entry	rear left and right with pre-stamped cable entries M15, M20 and M25 - these pre-stamped holes can be opened as necessary
Strain relief	with cable tie and screwed cable gland (M20)
Capacity	up to 48 fibres
Labelling strip included	no
Mounting set included	no
Splice protectors included	no
Extractable drawer	yes
Fold-down drawer	no

Optical Properties

Ferrule polishing	PC 0°
Fibre class	Multimode
Fibre type	G50/125
Fibre category	OM3
Colour code	IEC 60304
Adapter	LCD/PC
Adapter colour	turquoise
Ferrule material	Zirconia
Insertion loss (IL), maximal	0.25 dB
Insertion loss (IL), typical	0.12 dB
Return loss (RL), minimal	30 dB
Return loss (RL), typical	35 dB

Scope of delivery

- Splice box with
- two straight cable entries
 - one screwed cable gland M20
 - coloured pigtails with measurement report
 - FO adapters, fastened by screws
 - splice trays with cover
 - splice holder for 12 x crimp splice protectors

Versions

Material number	Product	Colour (Frontplate)	Number of adapters	Adapter orientation	Pigtails	Weight [kg]	Packing unit	GTIN / EAN
41546800ZY	Splice box OV-S 2xLCD/PC	light grey	2	offset horizontal	4 x LC	2.73 kg	1 pc.	40393910009750
41546900ZY	Splice box OV-S 4xLCD/PC	light grey	4	offset horizontal	8 x LC	2.78 kg	1 pc.	40393910009743
41533600ZY	Splice box OV-S 6xLCD/PC	black	6	offset horizontal	12 x LC	2.74 kg	1 pc.	40393910011258
41521200ZY	Splice box OV-S 6xLCD/PC	light grey	6	offset horizontal	12 x LC	2.74 kg	1 pc.	40393910013214
41535900ZY	Splice box OV-S 12xLCD/PC	black	12	offset horizontal	24 x LC	2.84 kg	1 pc.	40393910011029
41544700ZY	Splice box OV-S 12xLCD/PC	black	12	angled	24 x LC	2.81 kg	1 pc.	40393910009903
41521600ZY	Splice box OV-S 12xLCD/PC	light grey	12	offset horizontal	24 x LC	2.83 kg	1 pc.	40393910013139
41536100ZY	Splice box OV-S 24xLCD/PC	black	24	offset horizontal	48 x LC	3.02 kg	1 pc.	40393910010992
41522000ZY	Splice box OV-S 24xLCD/PC	light grey	24	offset horizontal	48 x LC	3.01 kg	1 pc.	40393910013054

Variants on request.



Subject to technical modification

As of 2023-09-07 06:54:06

FO duplex patch cord LCD/PC - LCD/PC

G50/125 OM3, Duplex Fig. 0

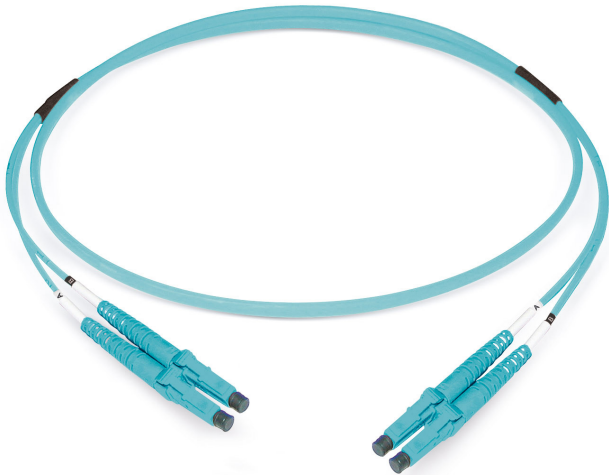


image similar

Description

Datwyler offers a broad range of terminated connectors for individual customer needs.

Construction

Cable	Duplex Fig. 0
Cable construction	I-V(ZN)HH (5.0x3.0mm)
Outer sheath colour	turquoise
Outer sheath material	LSZH

General properties

Operating temperature	-10 °C - +60 °C
-----------------------	-----------------

Optical Properties

Lifetime	1000 connections with stable attenuation values
Reproducibility of the IL	a maximum of +/- 0.1dB
Fibre type	G50/125 OM3
Ferrule material	Zirconia
Connector type side A	LCD/PC
IL maximal, connector A	0.25 dB
IL typical, connector A	0.15 dB
RL minimal, connector A	30 dB
RL typical, connector A	35 dB
Grade IEC61755, connector A (better than)	Bm2m
Standard connector A	IEC 61754-20
Connector type side B	LCD/PC
IL maximal, connector B	0.25 dB
IL typical, connector B	0.15 dB
RL minimal, connector B	30 dB
RL typical, connector B	35 dB
Grade IEC61755, connector B (better than)	Bm2m
Standard connector B	IEC 61754-20

Mechanical properties

Bending (IEC 60794-1-21 E11, reversible fibre attenuation)	≤ 0,5 dB
Connector cable retention	100 N
Crush resistance (IEC 60794-1-21 E3, reversible fibre attenuation)	≤ 0,2 dB
Tensile load (IEC 60794-1-21 E1 0,33% reversible fibre elongation)	200 N
Torsion (IEC 60794-1-21 E7, reversible fibre attenuation)	≤ 0,1 dB

Standards

Impact	IEC 60794-1-21 E4
Repeated bending	IEC 60794-1-21 E6

Versions

Material number	Product	Length (m)	Polarity	Weight [kg]	GTIN / EAN
423331	FO duplex patch cord LCD/PC - LCD/PC, G50/125 OM3	1	A to B	0.03 kg	40393910157161
423332	FO duplex patch cord LCD/PC - LCD/PC, G50/125 OM3	2	A to B	0.05 kg	40393910157154
423333	FO duplex patch cord LCD/PC - LCD/PC, G50/125 OM3	3	A to B	0.07 kg	40393910157147
423334	FO duplex patch cord LCD/PC - LCD/PC, G50/125 OM3	4	A to B	0.09 kg	40393910157130
423335	FO duplex patch cord LCD/PC - LCD/PC, G50/125 OM3	5	A to B	0.11 kg	40393910157123
423336	FO duplex patch cord LCD/PC - LCD/PC, G50/125 OM3	6	A to B	0.13 kg	40393910157116
423337	FO duplex patch cord LCD/PC - LCD/PC, G50/125 OM3	7	A to B	0.15 kg	40393910157109

Network Racks Standard DNRS

19"/21U, 27U, 42U and 48U

with glass front door, steel back panel



Network Racks Standard DNRS, 42U, 600 x 800 mm

Description

The Dätwyler Network Racks Standard (DNRS) are 19-inch cabinets with a sturdy, welded steel frame, available in heights of 21U, 27U, 42U, and 48U, and in the colors RAL 7035 (light grey) and RAL 9005 (black).

They feature a glass front door and a removable steel rear panel, ensuring easy accessibility. All doors are equipped with a swivel handle lock, DIN profile, and a universal key 333, offering an aperture angle of up to 180°.

The doors can be hinged on the right or left side and can be easily changed as needed.

With a load capacity of up to 800 kilograms and flexible cable management options, these racks are highly versatile.

Further configurations are available upon request.

Application

The DNRS racks are suitable for use in network rooms and IT environments where reliable organization of network devices and IT components is required.

Thanks to their modular design and security features, they can be easily integrated into existing IT infrastructures.

The racks provide a practical solution for offices and small data centers, ensuring the safe storage and protection of equipment.

Mechanical properties

Base frame	Welded sheet steel frame (1.5 mm)
Front door	One-Piece, tinted safety glass
Locking system frontdoor	1-point
Rear door	sheet steel panel, removable
Locking system reardoor	1-point
Disassembled	no
Side panels	removable, locks with universal key
Top panel	Standard cover plate (fixed) with knock-out openings: 4 x round cable entries Ø 100 mm, one cable entry at the back (300 x 100 mm), one opening for the ventilation unit, and 2 x side cable entries (500 x 115 mm).
Bottom panel	Standard base plate (fixed) with knock-out openings: one cable entry at the back (300 x 100 mm), one opening for the ventilation unit, and 2 x side cable entries (500 x 115 mm).
Mounting profile	2 pairs of 19" vertical profiles, front / rear, stepless in depth adjustable from inside, with U label
Feet	Set of adjustable feet as standard
Earthing	pre-installed flat earthing kit
Protection class	IP30
Bayable	yes
Maximum load [KG]	800 kg

Scope of delivery

Comes with 28 mounting kits (screws, cage nuts, washers).
Fully assembled and packaged, including installation instructions.

Versions

Material number	Product	Height [U]	Height [mm]	Width [mm]	Depth [mm]	Colour	Weight [kg]	Packing unit	GTIN / EAN
195433	Network Rack Standard DNRS	21	1,045	600	600	black	52 kg	1 pc.	40393910199499
195442	Network Rack Standard DNRS	21	1,045	600	600	light grey	52 kg	1 pc.	40393910199406
195431	Network Rack Standard DNRS	21	1,045	600	800	black	61 kg	1 pc.	40393910199512
195440	Network Rack Standard DNRS	21	1,045	600	800	light grey	61 kg	1 pc.	40393910199420
195432	Network Rack Standard DNRS	21	1,045	800	800	black	68 kg	1 pc.	40393910199505
195441	Network Rack Standard DNRS	21	1,045	800	800	light grey	72 kg	1 pc.	40393910199413
19720000ZY	Network Rack Standard DNRS	27	1,311	800	1,000	black	90 kg	1 pc.	40393910090215
195444	Network Rack Standard DNRS	27	1,311	600	600	black	61 kg	1 pc.	40393910199383
195447	Network Rack Standard DNRS	27	1,311	600	600	light grey	61 kg	1 pc.	40393910199352
195445	Network Rack Standard DNRS	27	1,311	600	800	black	70 kg	1 pc.	40393910199376
195448	Network Rack Standard DNRS	27	1,311	600	800	light grey	70 kg	1 pc.	40393910199345
195446	Network Rack Standard DNRS	27	1,311	800	800	black	72.5 kg	1 pc.	40393910199369
195449	Network Rack Standard DNRS	27	1,311	800	800	light grey	83 kg	1 pc.	40393910199338
195454	Network Rack Standard DNRS	42	1,978	800	1,000	black	118 kg	1 pc.	40393910199284

Wall-Mount Racks Premium DWMR

19" /6U, 9U, 12U, 15U and 18U

with glass front door & steel rear wall



Wall-Mount Rack Premium DWMR, 9U, 600 x 500 mm

Description

The Datwyler Wall-Mount Racks are designed to accept patch panels, active components and other data network equipment. They offer an extended access level from all sides thanks to removable (and lockable) side panels.

Mechanical properties

Base frame	Welded sheet steel frame (1.25 mm)
Bayable	no
Bottom Panel	Integrated standard steel panels with 150 x 56 mm hole, covered with sliding blind panel with butterfly nuts
Earthing	pre-installed flat earthing kit
Feet	(none)
Front door	With tinted safety glass and lock, 1-point locking, DIN single-profile cylinder, up to 180° aperture angle, can be hinged right or left (easy to change)
Mounting profile	1 pair of adjustable 19" vertical profiles (front), 19" rear plane (fix)
Protection class	IP 30
Rear door	Removable rear panel, with 150 x 56 mm knock-out panel and pre-punched holes for wall-mount installation (cabinet can also be installed without rear panel)
Side panels	Removable, locks with universal key
Top Panel	Integrated standard steel panels with 150 x 56 mm hole, covered with sliding blind panel with butterfly nuts

Scope of delivery

Fully assembled and packed, including 2 keys and drilling template

Versions

Material number	Product	Outer dimensions	Colour	Weight [kg]	Maximum Load [KG]
19546100ZY	DWMR, 6 U, 358 x 600 x 400 mm	6 U358 mm x 600 mm x 400 mm	light grey	12.5 kg	40
19546200ZY	DWMR, 6 U, 358 x 600 x 500 mm	6 U358 mm x 600 mm x 500 mm	light grey	16 kg	40
195033	DWMR, 9 U, 491 x 600 x 500 mm	9 U491 mm x 600 mm x 500 mm	light grey	20.5 kg	40
195037	DWMR, 9 U, 491 x 600 x 600 mm	9 U491 mm x 600 mm x 600 mm	light grey	18 kg	40
195034	DWMR, 12 U, 642 x 600 x 500 mm	12 U642 mm x 600 mm x 500 mm	light grey	28 kg	40
195038	DWMR, 12 U, 642 x 600 x 600 mm	12 U642 mm x 600 mm x 600 mm	light grey	25 kg	40
195035	DWMR, 15 U, 758 x 600 x 500 mm	15 U758 mm x 600 mm x 500 mm	light grey	30 kg	40
195039	DWMR, 15 U, 758 x 600 x 600 mm	15 U758 mm x 600 mm x 600 mm	light grey	30.8 kg	40
195036	DWMR, 18 U, 891 x 600 x 500 mm	18 U891 mm x 600 mm x 500 mm	light grey	33.5 kg	40

Material number	Product	Outer dimensions	Colour	Weight [kg]	Maximum Load [KG]
195040	DWMR, 18 U, 891 x 600 x 600 mm	18 U891 mm x 600 mm x 600 mm	light grey	35.5 kg	40
195099	DWMR, 9 U, 491 x 600 x 500 mm	9 U491 mm x 600 mm x 500 mm	black	23 kg	40
195103	DWMR, 9 U, 491 x 600 x 600 mm	9 U491 mm x 600 mm x 600 mm	black	26 kg	40
195100	DWMR, 12 U, 642 x 600 x 500 mm	12 U642 mm x 600 mm x 500 mm	black	26 kg	40
195104	DWMR, 12 U, 642 x 600 x 600 mm	12 U642 mm x 600 mm x 600 mm	black	29 kg	40
195101	DWMR, 15 U, 758 x 600 x 500 mm	15 U758 mm x 600 mm x 500 mm	black	30 kg	40
195105	DWMR, 15 U, 758 x 600 x 600 mm	15 U758 mm x 600 mm x 600 mm	black	33 kg	40
195102	DWMR, 18 U, 891 x 600 x 500 mm	18 U891 mm x 600 mm x 500 mm	black	36 kg	40
195106	DWMR, 18 U, 891 x 600 x 600 mm	18 U891 mm x 600 mm x 600 mm	black	39 kg	40
195411	Spare key			0.01 kg	40

Subject to technical modification

As of 2020-10-28 12:09:22