An Undergraduate Internship on Project Pashei

By

Md. Tanim

ID-1720773

Spring, 2021

Supervisor:

Ms. Romasa Qasim

Lecturer

Depart of Computer Science & Engineering

Independent University, Bangladesh

June 17, 2021

Dissertation submitted in Partial fulfillment for the degree of Bachelor of Engineering in Computer Science

Department of Computer Science & Engineering

Independent University, Bangladesh

TO WHOM IT MAY CONCERN

This is to certify that **Mr. Md. Tanim,** student of **Computer Science and Engineering Department of Independent University, Bangladesh** has successfully completed an internship from **February 2, 2021- April 30, 2021.**

During the period of his internship program with us he had been exposed to different process was found sincere, hardworking, inquisitive and efficient.

We wish him every success in his life and career.

Farhana Zannat
Admin Manager
M-World

Acknowledgement

Letter of Transmittal

17th June 2021

Ms. Romasa Qasim

Lecturer,

Department of Computer Science and Engineering,

Independent University, Bangladesh

Subject: Letter of Transmittal for Internship Report, Spring 2021.

Dear Sir, This is to inform you that I, Md. Tanim (ID: 1720773) from Internship Course of Spring 2021 Semester, from Section 7 would like to submit my Internship report. This report is based on my internship program and the project I have worked on. My internship period started from the 2nd of February 2020 and it is expected to end on the 30th of April 2020 at M-World BD.

This report is based on my experience and the work I did at M-World during my internship program. The primary goal for my internship was to gain experience from working in the software engineering industry and familiarize myself with all the different technology related fields of the company, including research and development, documentation, software development and to get acquainted with software development processes and practices.

Over the period of my internship at M-World BD, I had to learn and adapt to the evolving technologies being used in the healthcare sector and requirements and to be able to apply them in real life projects. I hope the following report can achieve your approval and is adequate.

Sincerely yours,

Md. Tanim

1720773

Evaluation Committee

……..
Signature

…………………………………………………………………………………........................
Name

…………………………………………………………………………………........................
Supervisor

……..
Signature

……..
Name

……..
Internal Examiner

……..
Signature

…………..……………………………………………………………………………………...........
Name

……..
External Examiner

……..
Signature

……..
Name

……..
Convener

Abstract

I started my internship on 2nd February at M-World. I was assigned to develop a system along with my team mate Farhan Ahmed. This system was named 'Project Pashei'. In developing this system there were many particular things that I had to do. I designed the prototype device how it will look. I worked with the micro controllers. I figured out libraries which one to use and where to use. I developed an interface where the data that will be taken from the device will be shown. Basically it is the interface where doctor will monitor the patient. Later I tested the device along with the ui/ux whether it works perfectly or not. We used namecheap hosting where we deployed our code. I worked there as a system engineer and front end developer. The system was completed on the last week of April.

Table of Contents

Table of Tables

Table of Figures

Chapter 1: Introduction

1.1 Background of the Work

The device of project Pashei is such a device that displays certain received signals from the human body to a doctor sitting in front of a desktop. It is basically built for remote areas where there is no wifi connection. The device is built in such a way that it sends the value of patient's important physiological parameters through a sim card of any company having a stable network connection. It goes straight to the front end of the website- Pashei - IoT Medic (mworldbd.com). This device can be called as a care unit as it will show the doctor the heart rate, oxygen rate, temperature, blood sugar and blood pressure all at a same time. That will allow the doctor to monitor the condition of the patient more effectively. It will help monitor to Covid-19 patient as it allows you to show the saturation of SpO2 in the blood cell.

Recent studies have shown that continuous monitoring in combination with other systems in case of deterioration improves patient outcomes. However, for continuous monitoring to be applicable for regular use, it should not lead to decreased mobility of the patient. Therefore, continuous monitoring devices should preferably be portable, wireless, and wearable on an easily accessible body part. In different parts of the world, wearable and wireless biosensors collecting continuous physiological data (CPD) [4] in real time to generate information reflecting the patients' current state is being established. This has been proven to be highly effective both for the treatment of individual patients as well as for assessing the efficacy and safety of care given to these patients. In Bangladesh, it would severely decrease the risk of healthcare providers decreasing their exposure to coronavirus, help meet the supply of required workforce and improve healthcare delivery.

Scientists have perceived the importance of body vital signs monitoring as they have a significant influence on the body. One of the important vital signs is SpO2 which stands for peripheral capillary oxygen saturation, which estimates the amount of oxygen in the blood. It is the percentage of oxygenated hemoglobin compared to the total amount of oxygenated and deoxygenated hemoglobin in the blood. In the neonatal intensive care unit (NICU) oxygen saturation is continuously monitored in infants, while blood pressure is often monitored continuously immediately after birth, or during critical illness (Kumar et al., 2020). Vital sign monitoring system plays an important role in ameliorating the care of ill or premature newborn infants (Tarassenko, 2014). The body temperature is a vital sign which denotes the efficacy of any treatment applied by the physician. Both the hypothermia (104 F) are medical conditions concerning the body temperature. These aberrations of temperature can cause brain damage (Minamisawa et al., 1990), cardiac arrest (Callaway et al., 2016), strokes (Doshi & Giudici, 2015). Vital sign monitoring helps in detecting these anomalies earlier which would help avoiding such hazardous circumstances. Tachycardia is a heart rate disease which occurs when the heart rate is above 100 beats. Most of the time the patient remains unknown of this deterioration. Vital sign monitoring systems can help patients and relevant health care personnel be aware of this heart beat disease (Duus et al., 2018).

Current wearable sensors are capable of recording heart rate (HR), respiration rate, temperature, and movement. Although some wearable sensors have now obtained approval for medical use internationally, uptake within health care has been minimal in Bangladesh. One reason could be that there is little research and development of such products in our country. The validity and reliability have not been studied in a relevant environment like ours. Therefore, this will be a

revolutionary step to be fully originated in Bangladesh, decreasing costs but ensuring full efficacy of the medical device.

Technology has come a long way. As it is device that will be used in remote areas, it has to be built in the cheapest way possible. It provides the data from remote areas with the 2G network of a sim since in remote areas it is impossible to have internet connection. So, this device have the potential to perform at any district and in any area of the country having a stable network as it is not depended on wifi [11]. This project Pashei is the best step towards digitization for a country like Bangladesh in telemedicine field [3].

1.2 Objectives

- Enable treatment in remote areas with the help of professional doctors by using this system.
- This system will be cost effective in both ways.
- Doctors will be able to see live data that will be coming from the servers and will be able to dictate his/her patient about the health condition.
- Patient's details will be saved in a database for future monitoring.

1.3 Scope of the Project

- View the dashboard for the doctors for monitoring all the connected patient.
- Add, Remove, Update, Replace Patients to the corresponding Pashei devices.
- Set up new devices for new patients.

Chapter 2: Literature Review

2.1 Project relation to Undergraduate Courses

Almost all CSE courses that are offered have provided knowledge that made this project sail smoothly. While some courses were implicitly helpful others provide knowledge that was directly incorporated in this project.

We have learned different topics in our undergraduate program such as Electronics, Database Management, App development, Web development, Software analysis, Software Management, Algorithms, Data Structure, Object Oriented Programming, Microprocessor course and so on. We gathered knowledge from these courses and developed various projects that are related to these topics. And for our internship project we were given a project that is related to electronics and web application development, where we will be assembling a hardware system that will be sending live data to the server and there will be a front-end where the live data will be shown. So where we are using our knowledge from Web development course to build the front end, we are using our knowledge from the Database course to save the data in the MySQL database, we are using our knowledge from Microprocessor and Electronics course in assembling the embedded system. And lastly we got to know about the methodology of how to develop a software by using a lifecycle systemically in the System Engineering course and from that knowledge we decided to follow the Waterfall Model approach. So this is how this Pashei project is related to my Undergraduate course.

2.2 Related Work

The idea of Project Pashei came from Vital Sign monitors. Vital sign monitors began with Seymour B. London, an American physician and inventor from Florida who designed the first automatic blood pressure monitor. He created an automated blood pressure machine after finding constant manual blood pressure readings cumbersome. The physician designed his prototype using a blood pressure cuff, a column of mercury, a microphone and a fish tank pump. While his materials may have been unconventional, his research technique was anything but; he then tested the device on 400 doctors at a 1965 American Medical Association convention. He demonstrated there was no significant difference from vital sign monitoring versus hand-taken blood pressure readings.

Today, vital sign monitors are used everywhere from hospital operating rooms to emergency situations. Vital sign monitors have continued to evolve through the development of technologies including digital signal processing, and new sensors that more accurately read the measurements, blood pressure, electric heart signals, blood oxygen, and temperature.

After the research we came to know that it is very costly and it also requires high internet speed or broadband speed to send the acquired details to the doctors. We have built this project mainly focusing on the improvement of the healthcare of people who live in remote zones and have low income. It is usable in town areas where there is no shortage of resources. But when it comes to remote urban areas, and if we want this thing to work properly throughout each and every corner of a developing country like Bangladesh, we came to realize that we can't rely on Wi-Fi or any advanced connectivity. So, Project Pashei was developed in such a way that it can communicate with its server from anywhere in the world where there is a 2G/3G sim connectivity using GPRS technology. In this way the cost of the total project was reduced dramatically and it feasible to

use anywhere in the world just with a sim card having internet package enabled in it. This device is having a Temperature sensor, a Heart Rate and Oxygen Rate sensor, a keypad and a display that will help the patient end support to input the value of blood sugar and blood pressure and an electronic stethoscope to examine the lung. The value of the blood sugar and blood pressure will be automatically gathered using the automatic equipment's available in the market.

So, the transfer of idea from VSM to a more efficient and feasible device for a country like Bangladesh is needed for monitoring patients in remote areas.

A new monitoring system designed to indicate patient vital signs was recently invented. The Remote Physiology Monitoring (RPM) is a portable device that is extraordinarily mobile and can be operated remotely. But these are very much costly. It costs around 300-600 per watch.

Compared to heavy equipment used at home and hospitals in decades past, modern devices are much faster, primarily digital, non-invasive and often combine several analytic features into a single small device.

Apple Watch Series 6: Health and Activity Tracking (On App Store)

Figure 1: UI screenshots of Apple Health app on series 6 watch

Chapter 3: Methodology

3.1 Software Development Life Cycle

In software engineering, a software development process is the process of dividing software development work into distinct phases to improve design, product management and project management. It is also known as a system development life cycle (SDLC). We can define SDLC as a framework that describes the activities performed at each stage of a System Development Project. So, it has some basic stages to be followed during the development phase. There many different SDLC to choose from like

- Waterfall Model Prototyping
- Agile
- Spiral Model
- Incremental
- Evolutionary Model
- Rapid Application Development
- V-Model

Figure 2: The software development life cycle

3.2 Model we used

All methodologies have their own advantages and disadvantages. However, the one that worked great for us was the waterfall method. Because we needed an easy to manage and a rigid model. More importantly, we wanted to divide our work into phases with specific deliverable and a review process. Moreover, the fact that the requirements were set by ourselves instead of having them defined by the client meant that we had very well-defined requirements which are not likely to change in the near future.

3.3 Waterfall Model

The waterfall model [10] is a popular version of the systems development life cycle model for software engineering. Often considered the classic approach to the systems development life cycle, the waterfall model describes a development method that is linear and sequential. Waterfall development has distinct goals for each phase of development. Imagine a waterfall on the cliff of a steep mountain. Once the water has flowed over the edge of the cliff and has begun its journey down the side of the mountain, it cannot turn back. It is the same with waterfall development. Once a phase of development is completed, the development proceeds to the next phase and there is no turning back.

Figure 3: Waterfall Model

Chapter 4:

Project Management and Financing

4.1 Work Breakdown Structure

The WBS is a method for getting a complex, multi-step project done. It is a way to divide and conquer large projects, so things are done faster and more efficiently. Work breakdown structure (WBS) is a hierarchical tree structure that outlines a project and breaks it down into smaller portions. The goal of a WBS is to make a large project more manageable. Breaking it down into smaller chunks means work can be done simultaneously by different team members which leads to better team productivity. Below is the WBS of the project Pashei.
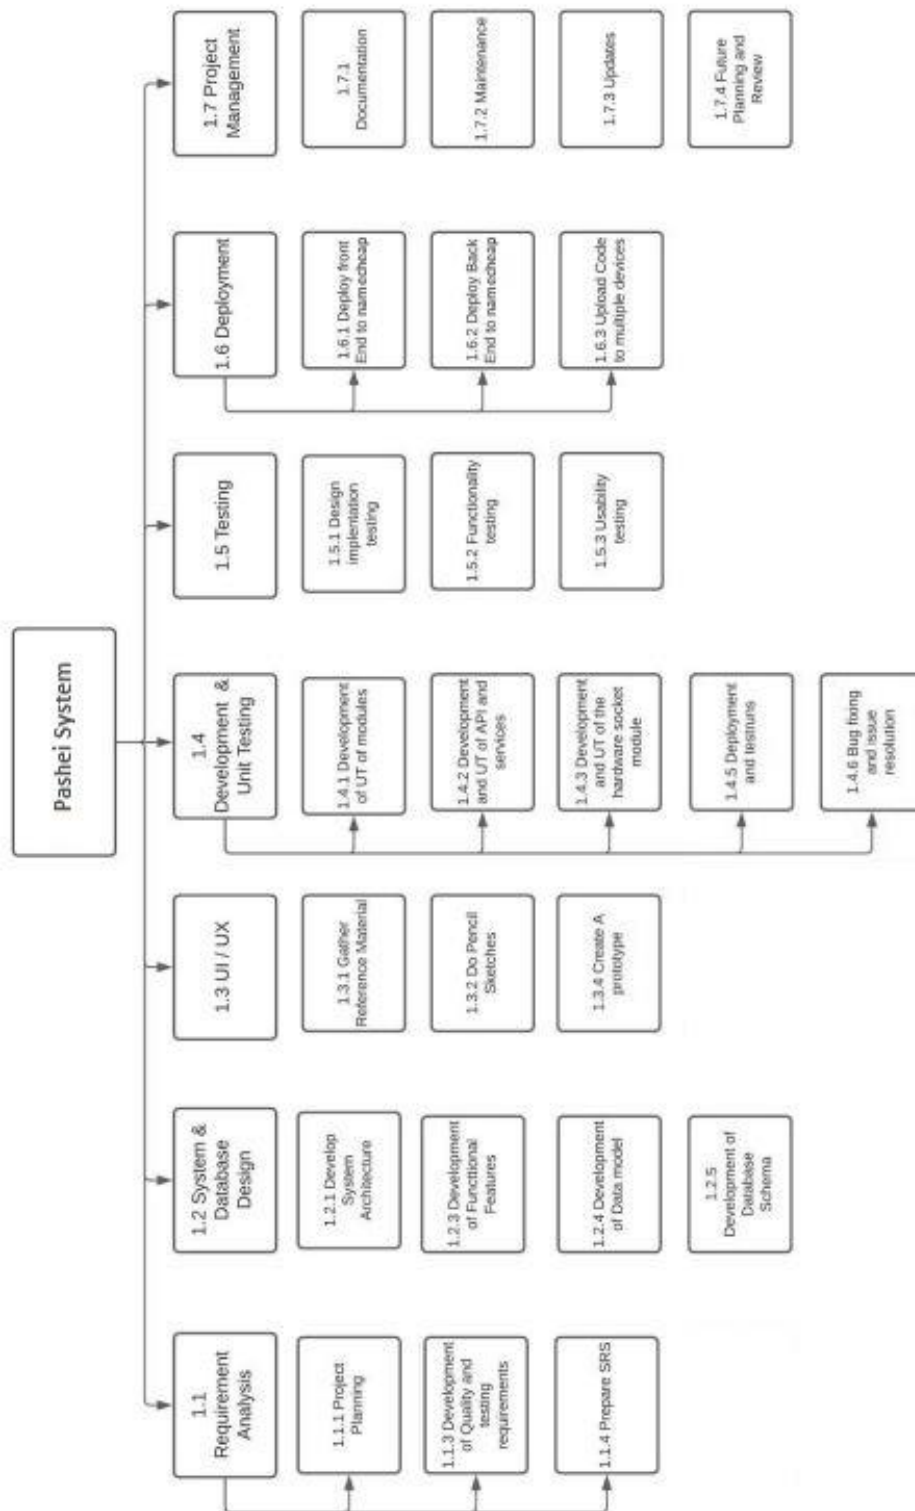
Figure 4: Work Breakdown Structure of Project Pashei

4.2 Gantt Chart

A Gantt chart has been produced to help plan and schedule project tasks. It helped assess how long the project should take, determine the resources needed and plan the order in which tasks will be completed. It also helped in managing the dependencies between tasks.

The Gantt chart was also useful for monitoring the project's progress once it has started. It helped in having a clearer vision of what should have been achieved by a certain time frame and when the project fell behind schedule; appropriate actions were taken to bring it back to course. The following Gantt chart was made for managing the Project Pashei.

Only the first nickname initials were used for decluttering the chart. The full names are as follows.

● Md. Tanim
● Farhan Ahmed

Project Pashei	Week 1	Week 2	Week 3	Week 4	Week 5	Week 6	Week 7	Week 8	Week 9	Week 10	Week 11	Week 12
Requirement Analysis	F+T											
System/Database Design	F+T	F+T										
UI/UX		T										
Code (Front End)			T	T						T		
Code (Back End)			F	F					F	F		
Research on libraries for Esp32/Sim 800L			T	T	T							
Esp32/Sim 800L Socket library Integration					F							
IoT (Code)						F						
Code (Hardware Client)								F	F			
UI & Feature Testing and Update											T	
Product Design and Development										T	T	
Complete Integration										F	F	
Namecheap Deployment											F+T	

F=Farhan Ahmed   T=Md. Tanim

Figure 5: Project Pashei Management Gantt Chart

4.3 Estimated Costing

This IoT device was made of many sensors, microprocessors and other things. The estimated costing of these things is given below-

Table 1: Estimated costing of the complete project

Product	Price in BDT (Tk)
ESP32 with GPRS	1700
Arduino Mega	650
Heartrate Sensor	600
Temperature Sensor	950
Keypad	100
Display	150
Casing Materials	500
Stethoscope	400
Headphone	100
Cables and Mic	40
Power and Switch	110
Total	5300

For the backend of the web application, we have used the home server of our firm and users of the device can use the application paying a small fee.

So, the approximate cost is around 5,300/-. Which will be much less if the product is produced in mass.

Chapter 5: Project Body

5.1 Description of the Project

We are assembling an electronic stethoscope, oximeter and temperature sensor from scratch and these values goes to the server from microcontroller through sim GPRS data. And the values of blood sugar and blood pressure is given through a keypad and display that is connected to the server through the sim GPRS data. There are other equipment that is used and these equipment are controlled by microcontroller such as ESP32 and Arduino Mega. And through http request the microcontroller sends these data to the server that is made by us. We created a MySQL database where the live data is stored and later we developed a front-end web page where the live data is shown from the MySQL database. That is how the doctor will inspect the condition of the patient.

5.2 System Analysis

It is a process of collecting and interpreting facts, identifying the problems, and decomposition of a system into its components. System Analysis is conducted for the purpose of studying a system or its parts in order to identify its objectives. It is a problem-solving technique that improves the system and ensures that all the components of the system work efficiently to accomplish their purpose. Analysis specifies what the system should do. This chapter contains parts of System Analysis that will help understand the project better.

5.2.1 Six Element Analysis

Table 2: Six Element Analysis of Pashei System

Process	System Roles				
	Human	Computer Hardware	Software	Database	Communication & Network
Monitor all Patients	Doctor	Desktop/Laptop	Edge, Chrome	MySQL	WAN & GPRS
Monitor specific Patient	Doctor	Desktop/Laptop	Edge, Chrome	MySQL	WAN & GPRS
Reset Patient Data	Doctor	Desktop/Laptop	Edge, Chrome	MySQL	WAN & GPRS
Allow/Cancel real time date	Doctor	Desktop/Laptop	Edge, Chrome	MySQL	WAN & GPRS
Associate Patient to Pashei Device	Nurse	Desktop/Laptop	Edge, Chrome	MySQL	WAN & GPRS
Dissociate Patient to Pashei Device	Nurse	Desktop/Laptop	Edge, Chrome	MySQL	WAN & GPRS

5.2.2 Feasibility Study

Feasibility Study is a study to evaluate feasibility of a proposed project or system. Feasibility study is the feasibility analysis or it is a measure of the software product in terms of how much beneficial product development will be for the organization in a practical point of view. Feasibility study is carried out based on many purposes to analyze whether software products will be right in terms of development, implantation, contribution of project to the organization, etc.

Main parts of Feasibility Study:

Technical Feasibility:

In Technical Feasibility, current resources; both hardware and software along with required technology are analyzed/assessed to develop the project. This technical feasibility study gives a report whether there exists correct required resources and technologies which will be used for project development. Along with this, feasibility study also analyzes technical skills and capabilities of technical team, existing technology can be used or not, maintenance and upgradation is easy or not for chosen technology, etc.

The Pashei web application is built using JavaScript, PHP, HTML, CSS, Custom-made RESTFUL APIs. These are the technologies that are very popular in the modern industry and one team mate was assigned for the front end of the app in which he was quite familiar with the technology and other team mate assigned for the backend of the app which includes the custom-made RESTFUL APIs. Hence, it can be concluded that the project is Technically Feasible.

Operational Feasibility:

Operational Feasibility: In Operational Feasibility degree of providing service to requirements is analyzed along with how easy the product will be to operate and maintain after deployment. Along with these, other operational scopes are determining usability of the product and determining whether a suggested solution by the software development team is acceptable or not etc.

The Pashe web portal is a web application made with complex logic and technology but for any end user it is quite self-explanatory. The UI of the project was designed with usability in mind. A lot of difficult choices were made to make it user-friendly even though they made the development complicated. Moreover, a short training will also be provided even though everything is very self-explanatory. Therefore, the project can be determined as Operationally Feasible.

Economic Feasibility:

In Economic Feasibility study cost and benefit of the project is analyzed; a detailed analysis of what will be the cost of the project for development which includes all required cost for final development like hardware and software resource required, design and development cost, operational cost, etc. After that it is analyzed whether the project will be beneficial in terms of finance for organization or not. We have made system keeping the economic factor in mind as this device is intended to improve the healthcare of people who live in rural urban areas and have low income. The system that this software along the Pashei device is designed to replace is very

cumbersome and extremely expensive. The only cost in developing this software in terms of other services are the payment for the domain and small amount of GPRS data for the sim connectivity. Everything else is going to be free for the first iteration. Later on, the system will have to move towards a paid database service and maybe paid hosting service too. However, even when that happens the amount of money will be insignificant in front of the service it will be providing. Thus in conclusion, it can be said that the project is Economically Feasible.

5.2.3 Problem Solution Analysis

The existing system in hospitals today is very back-dated and extremely expensive to install. There has been advances in technology everywhere. However, for some reason hospitals are still holding on to their old ways. The problems that our system is solving are listed below:

- Cannot be remotely monitored
- Devices are bulky and suffocating for the patient
- All patients cannot be looked after at same time
- The entire system requires huge number of hardware and human resources
- The Current System is expensive to install.

5.3 System Design

5.3.1 Rich Picture
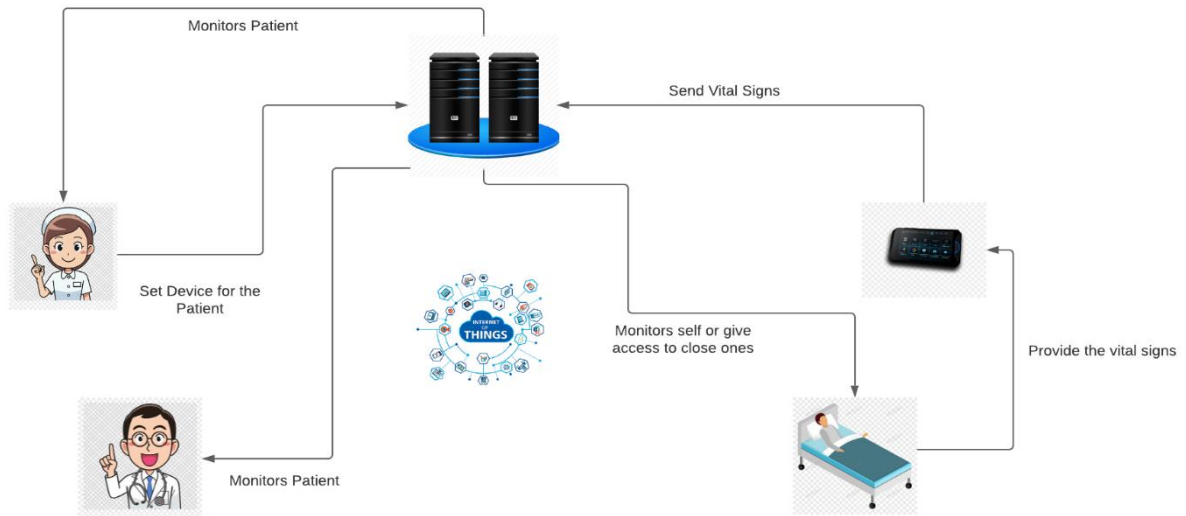
Figure 6: Rich picture of the Pashei Project

The rich picture [9] illustrates how the different stakeholders interact with the system. The Nurse will set device for the patients. They can then go on to associate/ disassociate a patient to/from the available devices. Moreover, the doctors and the nurses can monitor each all the patient real time, as data is being collected from the patient real-time. The data will be stored in mySQL database.

5.3.2 Architecture of the System

Software architecture is what defines and structures a solution that meets technical and operational requirements. Software architecture optimizes attributes involving a series of decisions, such as security, performance and manageability. It describes the organization and interaction of software components. There are many types of architectures that are used in different software. The Architecture that we went with comprises a RESTFUL APIs connection that allows real-time bidirectional data flow between client and server.
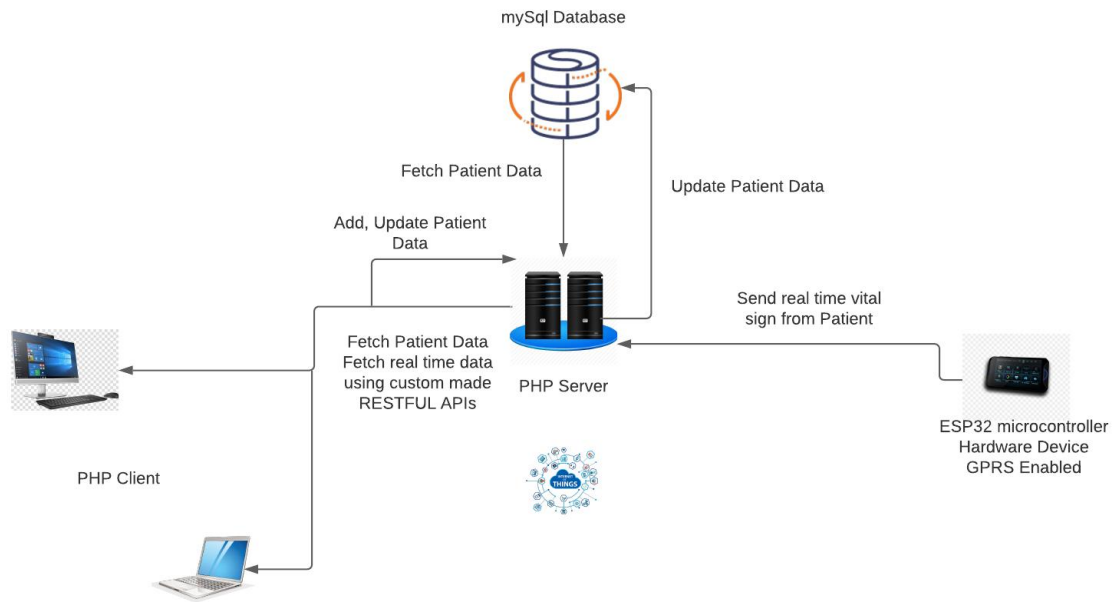
Figure 7: The architecture of Project Pashei

5.3.3 Process flow Diagram

Figure 8: The Process flow Diagram

5.3.4 Requirements

The software requirements are descriptions of features and functionalities of the target system. Requirements convey the expectations of users from the software product. The requirements can be obvious or hidden, known or unknown, expected or unexpected from the client's point of view. Requirements can be divided into two types; functional and non-functional requirements

5.3.4.1 Functional Requirements

A functional requirement is a function or feature that must be included in an information system in order to satisfy the business need and be acceptable to the users. A functional requirement defines the application and its components and the work of these components. The following functional requirements were gathered with our decided requirements gathering methods. The inputs, processes and output are discussed below:

•**Real-time Data:** This requirement shows the need of the data that will be passed from the device to the server in real-time. This data will then be fetched and will be shown in the web portal spontaneously. Satisfying this requirement ensures that the doctor can monitor patient in real-time and the data maintain accuracy and immediate treatment can be offered to the patient.

•**Responsive Web Application:** This requirement shows the need of the portal that the doctor will use to inspect the patient. There will be a responsive web application that will be connected with the hardware device through the server. The application can communicate with the device, which allows the doctor to take readings more accurately thus improving the consistency.

•**Save data in database:** This requirement shows the need of the data that has been gathered real-time by the device to be stored in a MySQL database for comparison and future usage purpose. Saving this data ensures the constant regulatory monitoring of a patient from time to time and improving the quality of the treatment whenever the doctor wants.

5.3.4.2 Non-Functional Requirements

Another type of requirement is non-functional requirements. A nonfunctional requirement is a description of the features, characteristics, and attributes of the system as well as any constraints that may limit the boundaries of the proposed solution. Non-functional requirements are briefly described below:

● **Performance**: represents the performance of the system which is required to exhibit and to meet the needs of users. Performance describes the acceptable throughput rate and acceptable response time. This application should provide a smooth experience for the Doctors and the Nurses and also should have no lag in displaying the real-time as long as the devices are connected to a stable internet.

● **Information:** represents the information that is pertinent to the users in terms of content, timeliness, accuracy and format. Information is about the necessary inputs and outputs and how it will be managed, types of the required data to be stored, how currently the information will be saved into the system, how the interfaces of external systems will work, etc.

●**Efficiency:** represents the system's ability to produce outputs with minimal waste. We have tried to eliminate duplicate steps in the processes and to use the resources in an efficient way. Keeping our code non repetitive by using reusable code and components is how we achieved efficiency

● **Extensibility and Maintainability Requirements:** There is one standard User interface designed for the look and feel of the application. The application can be expanded to accommodate many further modules without making any changes to any existing modules. The application is created in such a way that the developers can easily maintain both the server and client sides.

5.4 The Pashei Device

The device is powered by USB power supply. Data collected [4] from the device will be passed to the server and can be displayed on the web application in real time. Any device such as a laptop or desktop can access and view the data [8].

Figure 9: Pashei Device

The figure represents the Project Pashei prototype which will be used for the clinical trial and the vital signs like temperature, pulse rate, oxygen saturation, blood pressure and blood sugar (with keypad) will be recorded by the prototype [7].
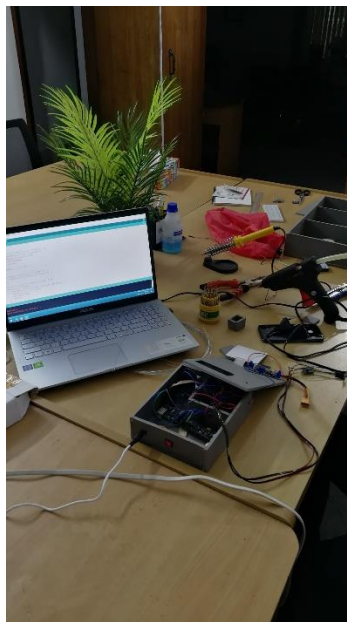

Figure 10: Work Table

The work table is shown here where all the discussions, decisions, changes, operations were done.

5.5 The parameters this prototype collects

5.5.1 Temperature

Body temperature is an age-old method of measuring the health status of a human body. It is a measure of the body's ability to generate and get rid of heat. The human body reacts instantly to changes in surrounding temperature to regulate the body temperature within a very narrow spectrum of optimum body operation. Using a temperature sensor the body temperature is calculated. The collected signal is then modified appropriately for proper data reading. A real time display is expected to be shown to grasp the continuous changes in body temperature.

5.5.1.1 Mean Temperature

Despite different variations, the human body has a mean temperature. The mean human body temperature was first calculated in the middle of the 19th century. The temperature of twenty thousand people was measured and documented and the mean temperature was found to be around 98.6 o F or 37 o C with a variation of 1 o F or 0.6 o C. This value is still taken as the mean human body temperature and the set point to measure variations.

5.5.1.2 Temperature sensor model

The GY-906 MLX90614 [6] is a high precision infrared non-contact thermometer module with I2C interface and 5V or 3.3V operation. Non-contact measurement perfect for measuring temperature of moving objects.

- Temperature measurement range: -70°C to +380°C
- I2C/SMBus interface
- Optional PWM and interrupt output
- 3.3V or 5V operation

The main difference between this and most other thermometers is that the temperature reading is taken without contacting the object whose temperature is being monitored. This can be very useful for monitoring the temperature of something moving like a spinning motor shaft or objects on a moving conveyor built for instance.

Because the sensor is not necessarily exposed to the same temperature that it is measuring, it can read a wide range of temperatures. It has measurement a range of -70°C (-94°F) to +380°C (+720°F) with an accuracy of 0.5°C around room temperature. The sensor itself is rated for -40°C to +125°C.

Figure 11: Temperature Sensor

5.5.2 Oxygen Saturation

Oximeter is based on the concept that arterial oxygen saturation determinations can be made using two wavelengths. The two wavelengths assume that only two absorbers are present, oxyhemoglobin and reduced hemoglobin. Light passing through the finger will be absorbed by skin pigments, tissue, cartilage, bone, arterial blood, venous blood but this absorption is indifferent to the wavelength of the light being passed through it. Therefore the absorbance by all these helps us in the determination of oxygen saturation in the blood.

5.5.2.1 Oxygen Sensor Model

Pulse and SPO2 sensor (MAX30100): The MAX30100 [6] is an integrated pulse oximetry and heart rate monitor sensor. It combines two LEDs, a photodetector, optimized optics, and low-noise analog signal processing to detect pulse oximetry and heart-rate signals. The MAX30100 operates from 3.3V and 5V power supplies and can be powered down through software with negligible standby current, permitting the power supply to remain connected at all times. It follows the I2C protocol for communication.

Figure 12: Finger pointed on Pulse and SpO2 Sensor

5.5.3 Blood Sugar

The **blood sugar level, blood sugar concentration**, or **blood glucose level** is the measure of concentration of glucose present in the blood of humans or other animals. Approximately 4 grams of glucose, a simple sugar, is present in the blood of a 70 kg (154 lb) human at all times. The body tightly regulates blood glucose levels as a part of metabolic homeostatis. Glucose is stored in skeletal muscle and liver cells in the form of glycogen; in fasting individuals, blood glucose is maintained at a constant level at the expense of glycogen stores in the liver and skeletal muscle. Here, we gathered the value and sent the value using the keypad to the server.

5.5.4 Blood Pressure

Blood pressure (**BP**) is the pressure of circulating blood against the walls of blood vessels. Most of this pressure results from the heart pumping blood through the circulatory system. When used without qualification, the term "blood pressure" refers to the pressure in the large arteries. Blood pressure is usually expressed in terms of the systolic pressure (maximum pressure during one heartbeat) over diastolic pressure (minimum pressure between two heartbeats) in the cardiac cycle. It is measured in millimeters of mercury (mmHg) above the surrounding atmospheric pressure. Here, we gathered the value and sent the value using the keypad to the server.

5.5.5 Electronic Stethoscope

It's an electronic stethoscope [6] that will be connected to a video call such as whatsapp, google meet and so on. And by the 3.2 mm port the sound of the heart or breathing of lung will be transmitted to the doctor's cellphone or desktop for hearing. He or She will be able to dictate the patient by hearing this sound.

Figure 13: Electronic Stethoscope

Chapter 6: Results & Analysis
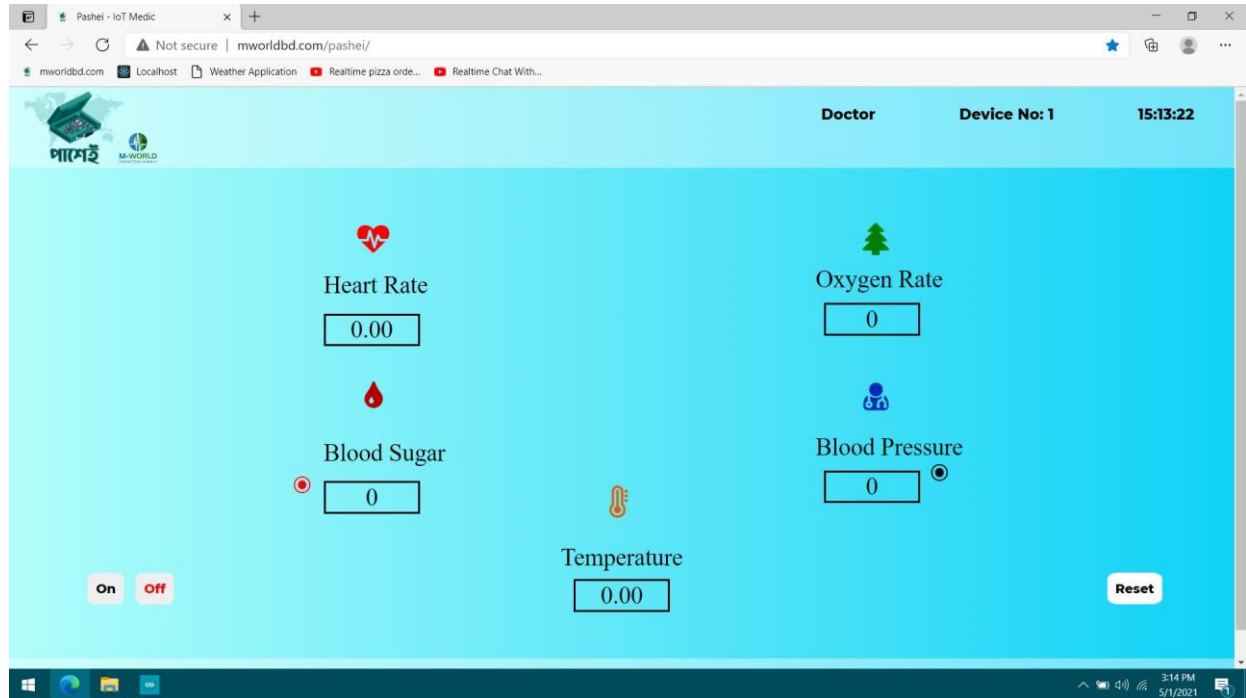
Figure 14: The Pashei Web application home page

This page will allow Doctors and Nurses to access and view all the features of the system. The data from the Pashei device [5] will be transmitted and viewed in these respective fields in real-time. The user of the application can turn ON or OFF the data transmission to reduce the cost of the internet. The user can also reset the data transmission in-case of any glitch or other issue.

Figure 15: The Pashei Web application with Blood Pressure
data transmission turned on.

The Doctor can select which data he or she wants to see by
clicking on the button of Blood Pressure or Blood Sugar.

Figure 16: The Pashei Web application with Blood Sugar data
transmission turned on.

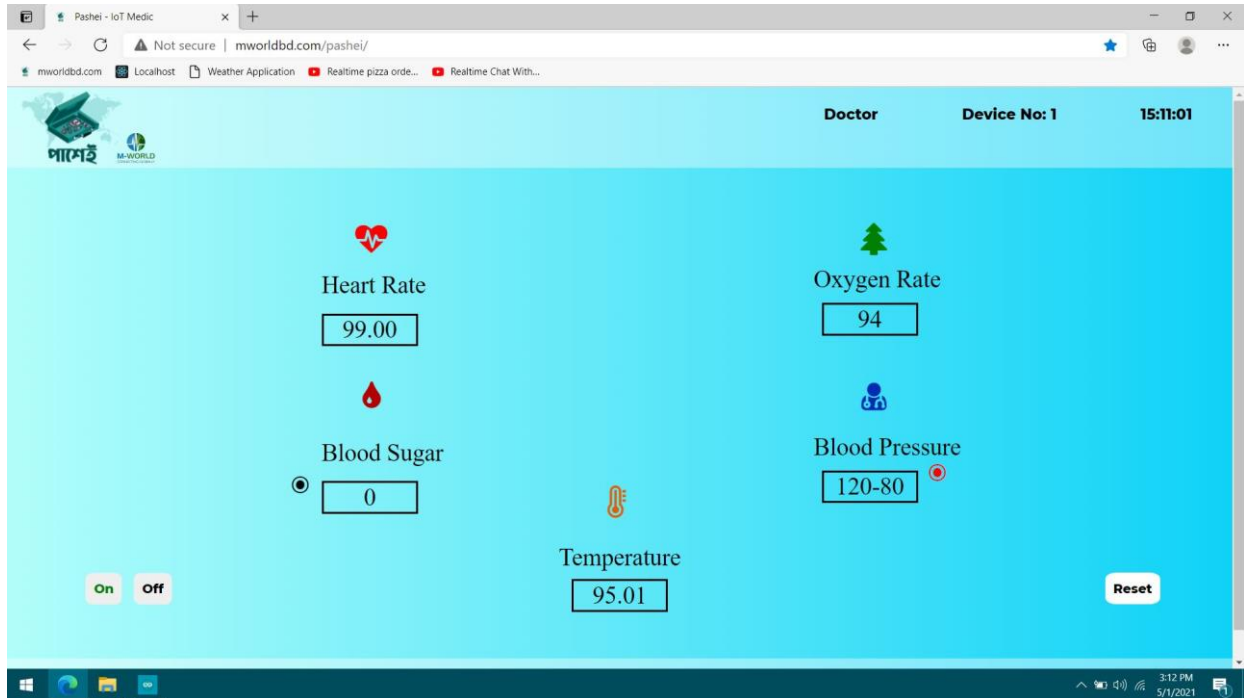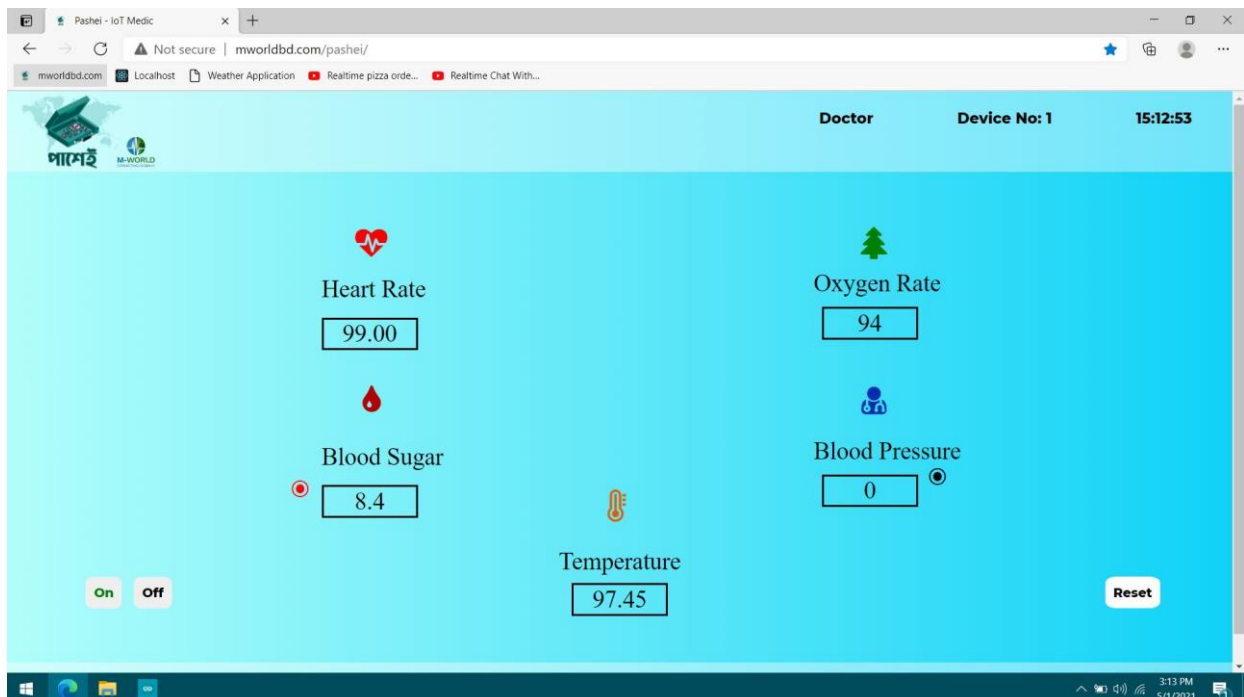# Chapter 7: Project as Engineering problem analysis

7.1 Sustainability of the product

Sustainability of the product refers to its ability to be maintained and updated. In the modern world, every application being released needs to be maintained and continuously updated for its user base.

A product can be sustainable in three main categories:

- **Community Sustainability:** This type of support comes in many forms such as downloading and installing the application, using the application, subscribing to paid services, feedback and referring to other people etc. After the deployment and official release of the Pashei platform, it is believed that it will have a strong user base since the target audience for the application is specifically narrow and concise. We can expect the users to refer to other hospitals or health-care centers regarding the application and thus growing the user base. With a growing user-base it will also grow a community and hence it can be said that it is Sustainable in terms of Community.

- **Financial Sustainability:** This refers to how the application's running cost will be maintained after it has been released and whether it will generate enough revenue as acceptable profit. An application's running cost includes - server cost, database storage cost, etc. The initial release of the Pashei application will have a small development fee to use but as the user base grows there are plans to introduce new premium services which will eventually be used to generate revenue. A major portion of the revenue generation is planned on focusing the sales of the Pashei device.

- **Organizational Sustainability:** It relates to how the organization will continue to operate after the release of the application. After the release of an application, usually the organization maintains the application via its current team, an extended team or by a fresh new team. Also, organizations update their project by adding newer features to it and organization may pivot to other projects, expand the teams, create new teams, etc. the Pashei application has many more features planned for the future to be worked on and released. Since the application has further plans, the project will be maintained and updated after its release as well and release premiumservices to it. In conclusion, it can be said that the project is Organizationally Sustainable.

7.2 Social and Environmental effects and analysis

Social Effect:

The Pashei platform is aimed to introduce and ease the effort of different hospitals and telemedicine firms to provide healthcare to people in different areas which also includes urban remote areas [1]. It will increase the quality of treatment and consistency for the firms. It also provides an efficient and data-orientedadmissions process which develops an ease to use virtual applications where they can speed up the paperwork process and focus more on the treatment side of things. They have a center in the Sundarbans. So, areas like these needs development in health perspective.

Environmental effect:

The hospitals here in Bangladesh still have a long way to go in regards to getting with the time and using technology for their advantage [1]. As future iterations of the module start rollingout the company hopes to build an eco-system where all applications merge to create a onesystem which the hospital staff and doctors will be using without any hesitation thus furthering the growth inside the medical industry here in Bangladesh.

7.3 Addressing Ethics and ethical issues:

Ethics and Ethical issues

In the world of smartphones with so much data collection, hacking, cybercrime, etc. there are some unspoken rules and ethics guidelines that need to be followed when working on creating and releasing an application. The developers of the VSM software believe that the application does not breach any code of conduct of application release and development since they all have been taken into serious concern [2]. Some of them are:

- **Not Sharing or Selling any User data**: Even though the data collected may not be of any privacy concern for most users, the app does not let any service, any applicationor any third party have access to the data collected.
- **Data Storage Security:** Only the lead developer and the owner of the Pashei application has access to the server and the database. Since they are hosted in the cloud andcan only be accessed via lead developer's and the owner's login credentials; the data stored can be deemed as safe and secure.
- **Collecting only related User data:** The app does collect user data, but those are strictly and only relevant for the app. The only data that is being collected are the user's pantry information and preferences information that the user will only provide on their own accord.
- **No Discrimination or Favoritism**: the Pashei application does not discriminate of any kindbased on race, sexuality, gender, religious beliefs, color, language, political or

other opinion, national or social origin, property, birth, or other status.

- **Proper use of third-party services and API:** the Pashei application does not violate any rules of any third-party services or the APIs that have been used in its development.

- **Clear Promotion:** the Pashei application only intends to promote the company that created it, itself, and people's health. Other than what has been mentioned, the Pashei application has no intention of promoting anything or anybody else.

Chapter 8:
Lesson Learned

8.1 Challenges faced during the Internship

During my internship program, I have faced lots of challenges while working on this Project. The main ones are:

- **Adapting to New Technologies:** Since this was the first time, I have ever worked on an API connection and real-time bidirectional data transferring. I had to learn and adapt to this new technology. Moreover, it was also my first time doing an IoT project as well. Because it was an IoT I also had program for the ESP32 as well while being unfamiliar with the syntax. It was tough though enjoyable. I had switch connections between the ESP2 and Arduino Mega which was quite tiring.
- **Choosing the right library:** There were few options while choosing the libraries. Implementing them on the web app was very easy but doing on the ESP32was very difficult.
- **Staying on track with the Gantt Chart:** In this Pandemic situation and after my full family getting infected in the virus (my father was hospitalized also), the internship there became quite a stretch.
- **Identifying and Fixing Bugs:** Often, there were bugs which were very hard to find, andeven after they have been found it became a big problem to fix it. There were bugs that were so difficult to deal with that it would take a whole week to fix it.

8.2 Solution of the challenges

- To know more about the syntax and the difference between ESP32 and Arduino codes, I had to go through a lot of research. After making several errors I was able to fix the problems and run the device smoothly.
- I ended up switching between libraries after spending a lot of time on one. However, eventually everything worked out fine.
- It took me and my sister 17 days to get covid negative while my parents became negative after 22 days. We had to spend 8 days at the hospital for my father's illness. Eventually by the grace of Allah we all were well after some time. While staying at home I worked on the front end side and modified the project consistently.
- It took us countless hours to fix small bugs in codes and also in hardware connections because there were so many connections and the code was pretty much complex. But at the end it came out good.

Chapter 9:
Future Work & Conclusion

9.1 Future Work and Conclusion of the project

The rapid development, uptake of affordable wearables such as wearable devices that involve continuous measurement of vital measures may provide added information to the care of patients. To date, there have been limited studies on the use of wearables in hospitalized medical patients in Bangladesh. Overall, there are numerous benefits of using such technologies. Performing manual observations on patients can take between 5-10 minutes per patient and can be time consuming for staff. The use of automatic monitoring systems such as this can free up staff to perform other tasks. The way that observations are taken currently is open to user interpretation, whereas wearable sensors will help to reduce any bias in recording observations.

Future challenges of using sensor technology to measure vital signs is the need for sensors and data transmission to be reliable, accurate, as well as to ensure that the collected patient data is securely saved (Yilmaz, 2010). Once reliability and accuracy are proven more widespread sensor use can take place. There is the potential for use in the community by patients with chronic medical conditions or high-risk patients at risk of deterioration such as the elderly. Would wide, the vital signs monitoring devices market size is anticipated to reach USD 9.1 billion by 2026, according to the new report of Grand View Research. The key factors in wearable sensor growth are a combination of higher user demand, advancementin sensor technologies resulting in miniaturization, reduced production costs, coupled with both wireless communication streams and a longer battery life.

There is a big market in Bangladesh with very few or no leaders in the field. This is a very lightly researched field and hence there is a huge potential for easy market entry. Such devices are mostly very expensive and can currently only be imported from other countries. This increases the costs. Therefore, making it locally not only provides national healthcare institutions an opportunity to improve their healthcare delivery with their own products but also get them at a very affordable price without any compromise in quality.

9.2 Conclusion of Internship

It was a great experience working with the M-World family as an intern. During the internship period I have learnt and applied a great deal of knowledge from my university courses and experience here. I was introduced to new technologies like ESP32 microcontroller, different sensors, PHP, Server Deployment, APIs and so much more. I have learned a lot about developing applications also about various development styles. I was obliged to adapt to changes rapidly and come up with logical solutions. During my project, I cooperated with my seniors and teammates to solve the challenges faced. My supervisors were always there to answer any questions and help me settle. This internship opportunity has paved the way to investigate the development environment and marketplace. I would like to appreciate once again everyone from M-World family and my honorable faculty who has made my life as an intern such a great experience.

Bibliography

1. Ethical Guidelines for Conducting Research Studies Involving Human Subjects, Bangladesh Medical Research Council. Available from: https://www.bmrcbd.org/application_form/EthicalGuidelines.pdf 3. Elena S. Izmailova, Ian L. McLean, Gaurav Bhatia, Greg Hather, Matthew Cantor, David Merberg, Eric D. Perakslis, Christopher Benko and John A. Wagner, 2018, Evaluation of Wearable Digital Devices in a Phase I Clinical Trial.

2. The UK Medical Research Council (2001). MRC Ethics Series: Human Tissue and Biological Samples for use in Research: Operational and Ethical Guidelines. Available from: www.mrc.ac.uk/Utilities/Documentrecord/index.html

3. Good Clinical Practice Network, 2011, Clinical Evaluation of the Vital Signs Monitoring System (VSMS), https://ichgcp.net/clinical-trials-registry/NCT03206528

4. Dias D, Paulo Silva Cunha J. Wearable health devices—vital sign monitoring, systems and technologies. Sensors. 2018;18:2414. doi: 10.3390/s18082414. https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6111409/

5. Jiang, Jiajun MM; Wang, Zheng PhD; Dong, YiYan PhD; Yang, Yan PhD; Ng, Chee H. MD; Ma, Shuangshuang PhD; Xu, Yi PhD; Hu, Hailan PhD; Hu, Shaohua PhD, A statistical analysis plan for a randomized clinical trial to evaluate the efficacy and safety of ethosuximide in patients with treatment-resistant depression, Medicine: August 2019 - Volume 98 - Issue 31 - p e16674 doi:10.1097/MD.0000000000016674

https://doi.org/https://doi.org/10.1016/j.jelectrocard.2014.12.001

6. Kumar, N., Akangire, G., Sullivan, B., Fairchild, K., & Sampath, V. (2020). Continuous vital sign analysis for predicting and preventing neonatal diseases in the twenty-first century: big data to the forefront. Pediatric Research, 87(2), 210–220. https://doi.org/10.1038/s41390-019-0527-0

7. Minamisawa, H., Smith, M.-L., & Siesjö, B. K. (1990). The effect of mild hyperthermia and hypothermia on brain damage following 5, 10, and 15 minutes of forebrain ischemia. Annals of Neurology, 28(1), 26–33. https://doi.org/https://doi.org/10.1002/ana.410280107

8. Yilmaz T, Foster R, Hao Y. 2010, Detecting vital signs with wearable wireless sensors. Sensors;10(12):10837–62.

9. Attribution: Icons made by srip, Freepik and Pixel Perfect from lucidchart.com

10. What is Waterfall Model

11. In-Depth data (lastminuteengineers.com)