



# Single Group

## Setup Starts Here

A Simple Guide to Slayer Single Group

*Make Coffee Better*

CRAFTED IN SEATTLE, 2007

# Congratulations, your new machine has arrived!

This guide contains general information about unpacking and installing your espresso machine but is not a substitute for the user manual. Read the user manual completely before operating your Slayer Single Group machine.

## More Resources

To utilize our step by step video guide to uncrating, installing and setup please go to, [SLAYERESPRESSO.COM/PRODUCT/SINGLE-GROUP-ESPRESSO](https://slayerespresso.com/product/single-group-espresso) 1st video at the bottom.

Get the most out of your machine and in case of additional machine or product questions, reach out to the sales team at:

[SALES@SLAYERESPRESSO.COM](mailto:SALES@SLAYERESPRESSO.COM)

For immediate assistance, contact your authorized Slayer reseller or our Seattle-based technical support team:


[SUPPORT@SLAYERESPRESSO.COM](mailto:SUPPORT@SLAYERESPRESSO.COM)

+1 206-284-7171



## Required Tools & Supplies

To set up your espresso machine, you will need several tools and supplies that are not included:

- #2 Phillips-head screwdriver
- 9/16" socket wrench
- Adjustable wrench
- Knife or box cutter
- Water treatment system



The crate top is attached to its base with two (2) screws in each corner, for a total of eight (8) screws. Use a Phillips-head screwdriver to loosen and remove all screws, then carefully lift the crate top with the help of at least one other person.

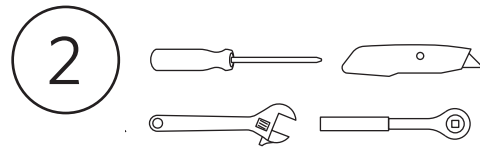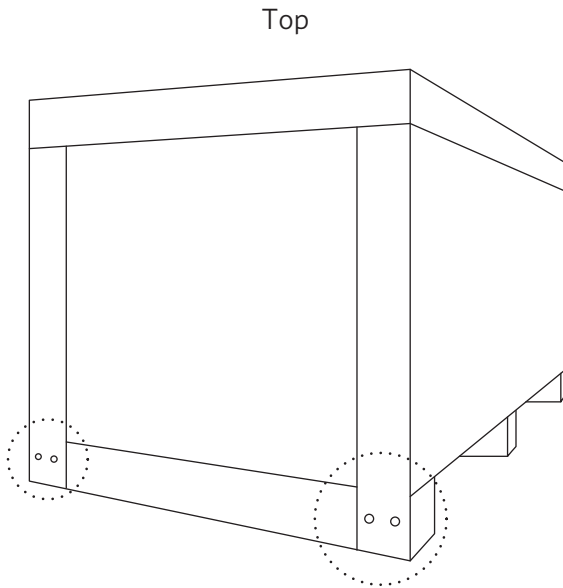



Your machine is wrapped in a protective covering. Remove the covering to reveal all crate contents.

- Slayer espresso machine
- Attached power cords, plumbing and drain lines


Remove velcro banding around drain tray and machine, set aside accessories.

Your machine is attached to the pallet with two (2) bolts, threaded into each foot of the 'X'. Use a 9/16" socket wrench to loosen and remove all bolts.

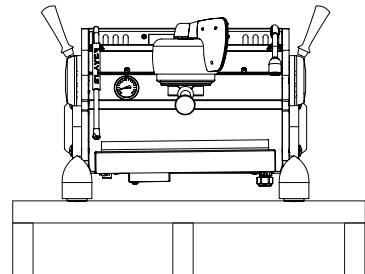


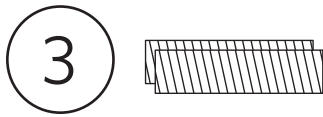

At least two (2) able-bodied people will be needed to lift your machine.

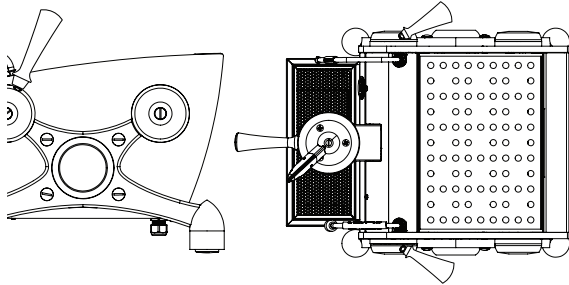



Lift the machine up and away from the crate base, lifting only from the 'X'. Do not handle the machine from the drip tray.

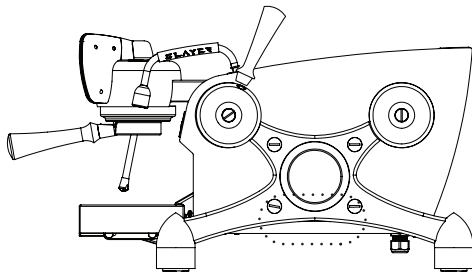

With the machine elevated, locate the four (4) rubber feet inside of the accessories box and install them on the feet of the 'X'.


Lower the machine into the prepared position.

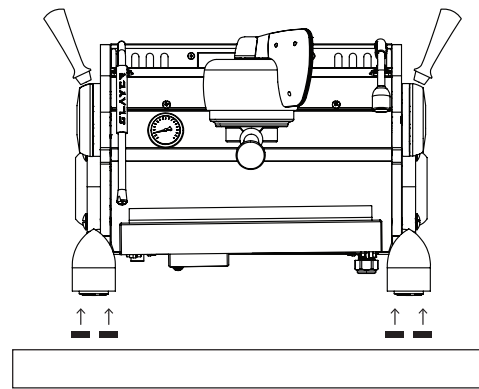

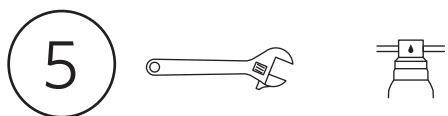

Locate drain line, attach to machine.

Locate the 40" braided hose inside of the accessories box. Connect water line to machine from treatment system with the braided hose, using a wrench to tighten.

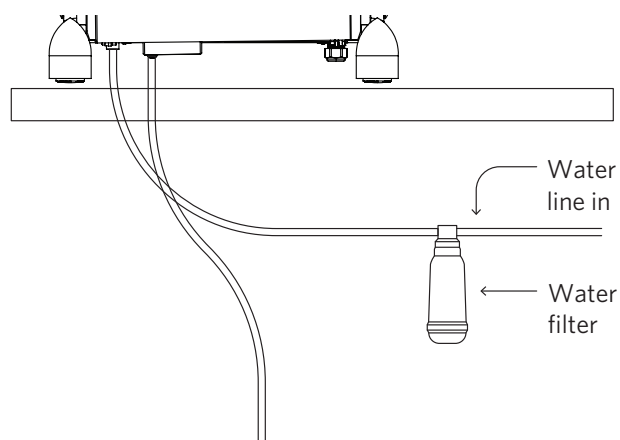


Turn on the main water line.

Insert the main power cord into an appropriately-rated and grounded receptacle.

Main power



Remove cup tray and turn on the power switch.

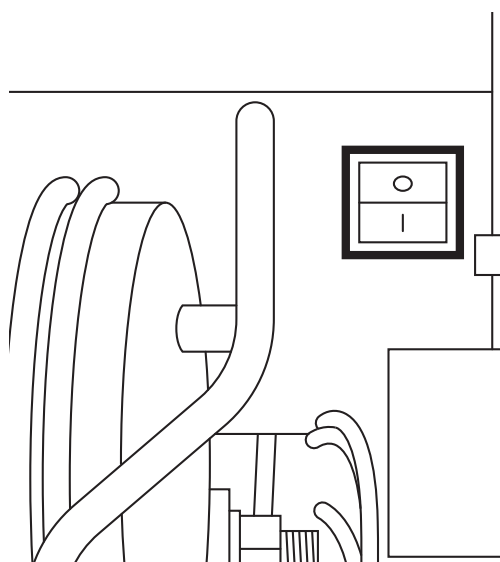


7

The pump motor will activate to fill the machine. Filling is complete when the pump turns off.

Move the brew actuator left, to the "on" position. When water begins to flow from the grouphead, return the brew actuator to the "off" position.

Once the boilers are full, enter into the programming to 'Heater Control' and turn on 'brew' element and 'steam' element. Actuate and keep the left steam wand "on" (open) while the steam tank heats and pressurized. Actuate the steam wand to the "off" position once steam is coming from the steam wand.

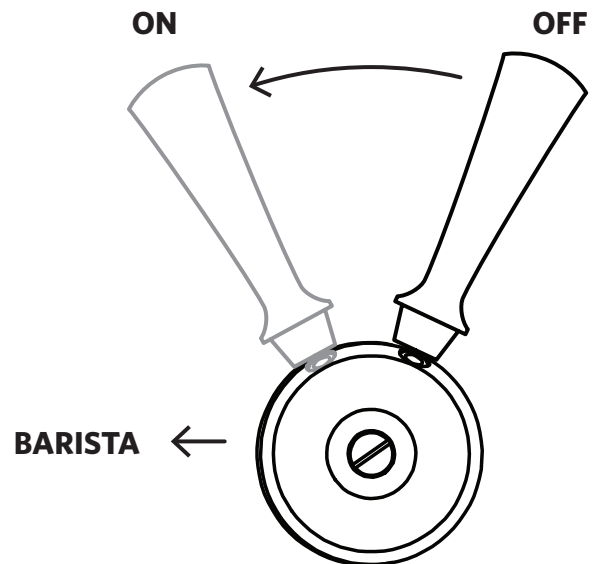

Incorrect operation may result in damage to the equipment, personal injury, or even death. Disregarding the instructions contained herein indemnifies Slayer from all resulting damages and may void the warranty on your machine.

