



Megatop Salad Tables

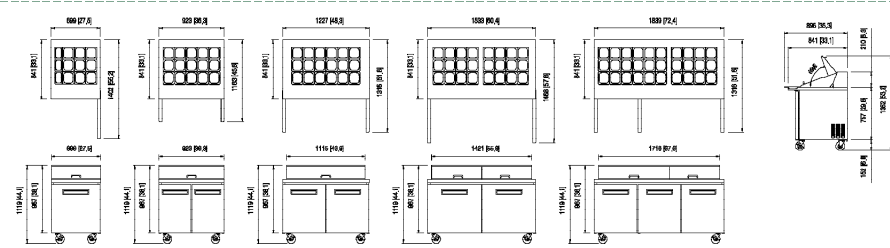

Model	LMT-200R	LMT-260R	LMT-360R	LMT-500R	LMT-650R
Voltage/Frequency (V/Hz)	115, 220V/50, 60Hz				
Refrigerant (Name)	R134a				
Compressor (HP)	1/5	1/5	3/8	3/8	3/8
Cooling type	Fan Cooling				
Temp Range (°C Degrees)	0°C ~ 7°C (32°F ~ 44.6°F)				
Capacity (/ Cubic Feet)	193/6.8	260/9.2	361/12.7	459/16	556/19.63
Shelves	1	2	2	2	3
Doors	1	2	2	2	3
Max No Of Gastronorm Pans	12, 9(1/6") + 3(1/9")	15(1/6")	18(1/6")	24(1/6")	30(1/6")
Material	Stainless Steel				
Exterior Dimension	Width (mm)	699×841×1119	923×841×1119	1227×841×1119	1533×841×1119
	Width (inch)	27.51 X 33.11 X 44.05	36.33 X 33.11 X 44.05	48.30 X 33.11 X 44.05	60.35 X 33.11 X 44.05
Weight (Kg/Pound)		77/169lb	89/196lb	104/229lb	126/277lb

Pizza Prep. Tables

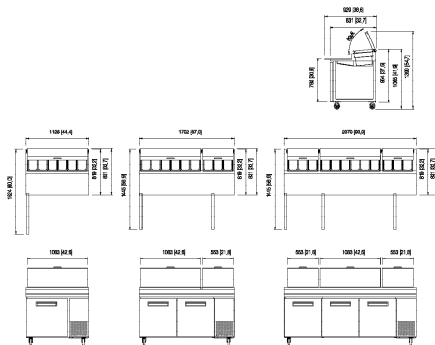


Model	LPT-44	LPT-67	LPT-93
Voltage/Frequency (V/Hz)	115, 220V/50, 60Hz		
Refrigerant (Name)	R134a		
Compressor (HP)	3/8	3/8	1/2
Cooling type	Fan Cooling		
Temp Range (°C Degrees)	0°C ~ 7°C (32°F ~ 44.6°F)		
Capacity (/ Cubic Feet)	320/11.3	572/20.2	873/30.8
Shelves	2	4	6
Doors	1	2	3
Max No Of Gastronorm Pans(option)	6(1/3")	9(1/3")	12(1/3")
Material	Stainless Steel		
Exterior Dimension	Width (mm)	1128×831×1065	1702×831×1065
	Width (inch)	44.40 X 32.71 X 41.93	67.00 X 32.71 X 41.93
Weight (Kg/Pound)		137/301lb	231/509lb

Chef Base



Model	LCB-53	LCB-71	LCB-74	LCB-83	LCB-86	LCB-93	LCB-96	LCB-98
Voltage/Frequency (V/Hz)	115, 220V/50, 60Hz							
Refrigerant (Name)	R134a							
Compressor (HP)	1/5	1/5	1/5	3/8	3/8	3/8	3/8	3/8
Cooling type	Fan Cooling							
Temp Range	0°C ~ 7°C (32°F ~ 44.6°F)							
Capacity (/ Cubic Feet)	280/9.8	405/14.3	405/14.3	487/17.2	487/17.2	606/21.4	606/21.4	606/21.4
Drawers/Doors	2	4	4	4	4	4	4	4
Max No Of Gastronorm Pans(Full size(option))	6	8	8	10	10	10	12	12
Material	Stainless Steel							
Exterior Dimension	Width (mm)	1340×775×638	1790×775×638	1855×775×638	2115×775×638	2185×775×638	2362×775×638	2440×775×638
	Width (inch)	52.75 X 30.51 X 25.11	70.47 X 30.51 X 25.11	73.03 X 30.51 X 25.11	83.26 X 30.51 X 25.11	86.02 X 30.51 X 25.11	92.99 X 30.51 X 25.11	96.06 X 30.51 X 25.11
Weight (Kg/Pound)		107/235lb	135/297lb	138/304lb	155/341lb	158/348lb	161/354lb	165/363lb

Cold Table GN

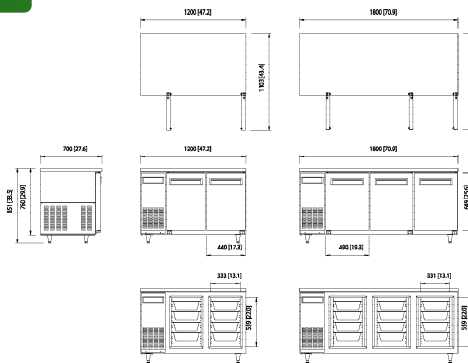

Model	RC120	RC180
Voltage/Frequency (V/Hz)	220~240V/50, 60Hz	
Refrigerant (Name)	R134a	
Compressor (HP)	1/3	1/3
Cooling type	Fan Cooling	
Temp Range (°C Degrees)	0°C ~ 7°C (32°F ~ 44.6°F)	
Capacity (/)	300	521
Shelves	4	6
Shelve Bars (Set)	8	12
Doors	2	3
Max No Of Gastronorm Pans Full size (option)	8	12
Material	Stainless Steel	
Exterior Dimension	Width (mm)	1200×700×850
	Width (inch)	47.24 X 27.56 X 33.46
Weight (Kg/Pound)		80/176lb



DAEYONG E&B

[Head Office & Factory]

1BL 38LT, 727-7, Wonsi-Dong, Danwon-Ku, Ansan-shi, Kyongkido, Republic of Korea
www.daeyeong.co.kr ☎ 82-31-491-1601~2 ☎ 82-31-491-1603



• Overseas Business team

General manager W. H. Back
Sales manager Josh-K. Lee
Export staff Emily, Park

M.P : 82-10-3742-4701 / Mail: whback@daeyeong.co.kr
M.P : 82-10-6421-7705 / Mail: jglee@daeyeong.co.kr
M.P : 82-10-2751-8385 / Mail: beads@daeyeong.co.kr

Lassele
your first selection

Feel a difference

TABLE REFRIGERATION LINE



www.daeyeong.co.kr
www.lassele.com



DAEYONG E&B Co., Ltd.



Table Refrigeration is defferent like this !

- Best solution for the efficiency of the labor and sanitation in a kitchen environment.
- High quality stainless exterior and interior.
- Certified for ETL Sanitation, UL Safety, CUL, and CE.
- Powerful forced air circulation, minimizing the energy consumption.
- Optional pans for several Pan requiring products (Stainless Steel or Plastic).
- Optional Casters (3inch/5inch) with further options of Legs.
- Drain inside the cabinet.
- HCFC high density polyurethane Insulation.
- Energy efficient cooling systems.
- Highly efficient condenser elevates the performance of the refrigeration system.


TECHNICAL FEATURES




- Continuous supply of the adequate freshness at a suitable level of temperature.
- Simple installation
- Shelf with adjustable height.
- Spring loaded door
- Auto Defrost system



Cooling Type

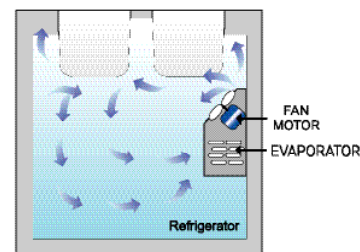

▲ TABLE REFRIGERATOR LINE (LTB)

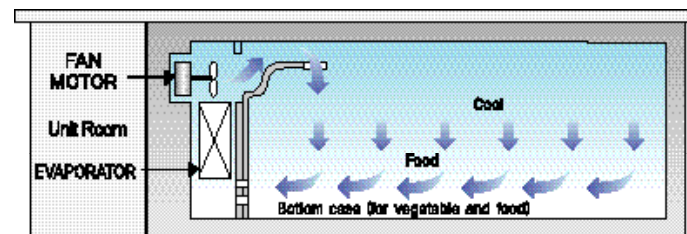


▲ TABLE REFRIGERATOR LINE(LTR)

TABLE REFRIGERATOR LINE (LTB)




Continental
Type

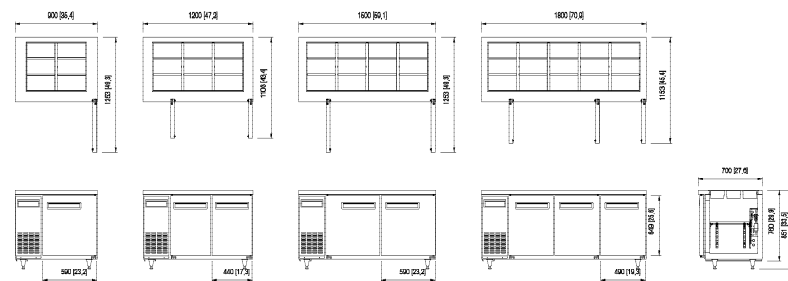

	LTB-1220PC	LTB-1520PC	LTB-1820PC
Cooling type	Fan Cooling		
Dimension	mm 1200×700×850	1500×700×850	1800×700×850
	Inch 47,2×27,6×33,5	59,1×27,6×33,5	70,9×27,6×33,5
Capacity(Litter/Cubic Ft)	300 l /10,6	412 l /14,5	521 l /18,4
Weight(Kg/Pound)	78/172	89/196	107/236
Material	Stainless Steel		
Voltage/Frequence	115v, 220v/50/60Hz		
Controller	DIGITAL		
Temp. range	REF. -1 °c ~ +7 °c (30,2 °F~44,6 °F)		
# of Door	2	2	3
Refrigerant	R-134a, R-404a		

TABLE REFRIGERATOR LINE (LTR)


Continental
Type

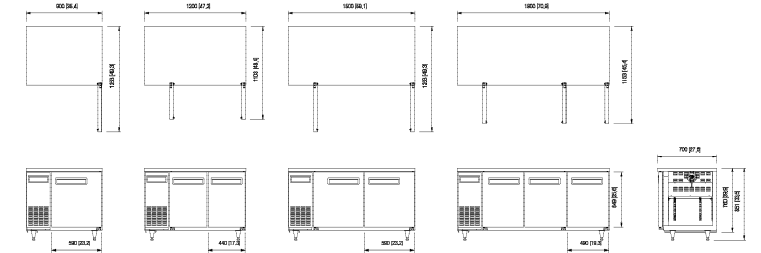

	LTR-1271PC	LTR-1571PC	LTR-1871PC
Cooling type	Fan Cooling		
Dimension	mm 1200×700×850	1500×700×850	1800×700×850
	Inch 47,24×27,55×33,46	59,05×27,55×33,46	70,86×27,55×33,46
Capacity(Litter/Cubic Ft)	300 l /10,6	412 l /14,5	521 l /18,4
Weight(Kg/Pound)	78/172	89/196	107/236
Material	Stainless Steel		
Voltage/Frequence	115v, 220v/50/60Hz		
Controller	DIGITAL		
Temp. range	REF. -1 °c ~ +7 °c (30,2 °F~44,6 °F)		
# of Door	2	2	3
Refrigerant	R-134a, R-404a		

Sandwich LINE (LST)


American
Type

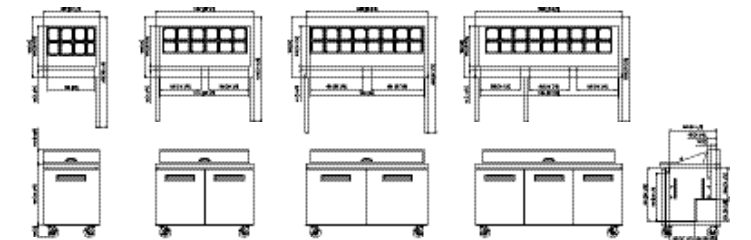

	LST-200R	LST-350R	LST-500R	LST-650R
Cooling type	Fan Cooling			
Dimension	mm 584×563×667	1115×563×667	1471×563×667	1724×563×667
	Inch 23,0×22,2×26,3	43,9×22,2×26,3	57,9×22,2×26,3	67,9×22,2×26,3
Capacity(Litter/Cubic Ft)	193 l /6,8	361 l /12,7	459 l /16,2	556 l /19,6
Weight(Kg/Pound)	91/201	129/284	144/317	168/370
Material	Stainless Steel			
Voltage/Frequence	115v, 220v/50/60Hz			
Controller	Mechanical Dial			
Temp. range	REF. -1 °c ~ +7 °c (30,2 °F~44,6 °F)			
# of Door	1	2	2	3
Refrigerant	R-134a, R-404a			

UNDER COUNTER LINE (LUC)

American
Type

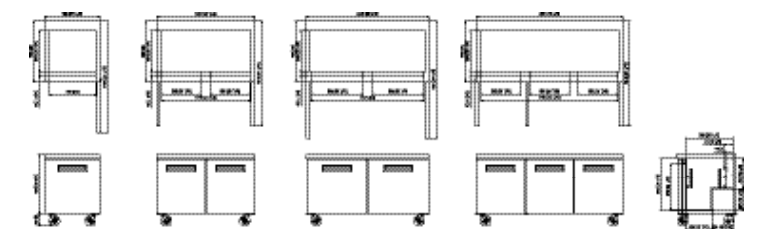

	LUC-200R/F	LUC-350R/F	LUC-500R/F	LUC-650R/F
Cooling type	Fan Cooling			
Dimension	mm 584×563×667	1115×563×667	1421×563×667	1724×563×667
	Inch 23,0×22,2×26,3	43,9×22,2×26,3	55,9×22,2×26,3	67,9×22,2×26,3
Capacity(Litter/Cubic Ft)	193 l /6,8	361 l /12,7	459 l /16,2	556 l /19,6
Weight(Kg/Pound)	91/201	129/284	144/317	168/370
Material	Stainless Steel			
Defrost	Auto			
Voltage/Frequence	115v, 220v/50/60Hz			
Controller	Mechanical Dial			
Temp. range	FRE. REF. -18 °c ~ -24 °c (-0,4 °F ~ -11,2 °F) -1 °c ~ +7 °c (30,2 °F~44,6 °F)			
# of Door	1	2	2	3
Refrigerant	R-134a, R-404a			